



PE1605C4E6

ULTRA LOW CAPACITANCE ESD PROTECTION

Voltage

5 V



Features

- IEC61000-4-2(ESD): ± 20 kV Air, ± 15 kV Contact
- IEC61000-4-4(EFT): 40 A(5/50 ns)
- IEC61000-4-5(Lightning): 4 A(8/20 μ S)
- Low clamping voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: Molded plastic, SOT-563
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00009 ounces, 0.003 grams

SOT-563

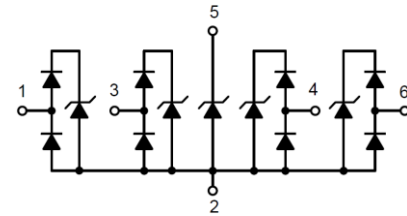

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V_{ESD}	± 20	kV
ESD IEC61000-4-2(Contact)		± 15	
Operating Junction Temperature Range	T_J	-55~150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~150	$^\circ\text{C}$



PE1605C4E6

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage	$V_{RWM}^{(1)}$	-	-	-	5.5	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR} = 1\text{ mA}$, any I/O pins to GND	6	6.9	-	V
Reverse Leakage Current	I_R	$V_R = 5\text{ V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$, any I/O pins to GND	-	-	10	V
		$I_{PP} = 4\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$, any I/O pins to GND	-	-	15	
Clamping Voltage TLP	$V_{CL}^{(2)}$	$I_{PP} = 8\text{ A}$, $t_P = 100\text{ ns}$, any I/O pins to GND	-	16	-	V
		$I_{PP} = 16\text{ A}$, $t_P = 100\text{ ns}$, any I/O pins to GND	-	23.5	-	
Dynamic Resistance	R_{DYN}	$t_P = 100\text{ ns}$	-	0.94	-	Ω
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{ MHz}$, Between any I/O pins to GND	-	-	0.6	pF
		0Vdc Bias $f = 1\text{ MHz}$, Between any I/O pins	-	-	0.3	

NOTES:

1. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.
2. Testing using Transmission Line Pulse (TLP) conditions: $Z_0 = 50\Omega$, $t_P = 100\text{ ns}$.



PE1605C4E6

TYPICAL CHARACTERISTIC CURVES

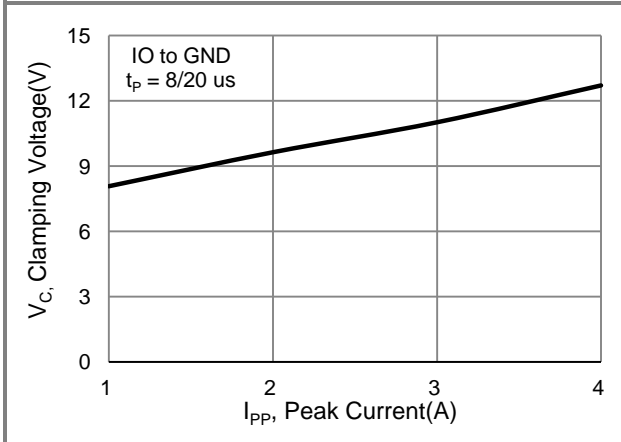


Fig.1 Typical Peak Clamping Voltage

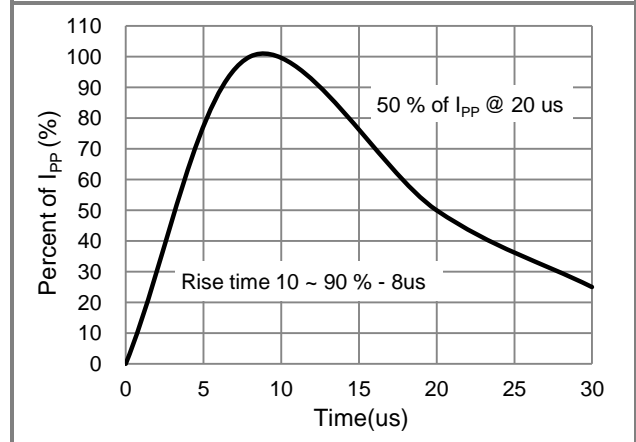


Fig.2 Pulse Waveform

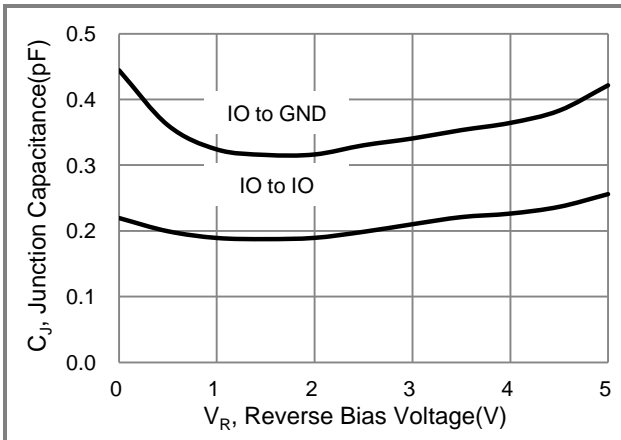


Fig.3 Typical Junction Capacitance

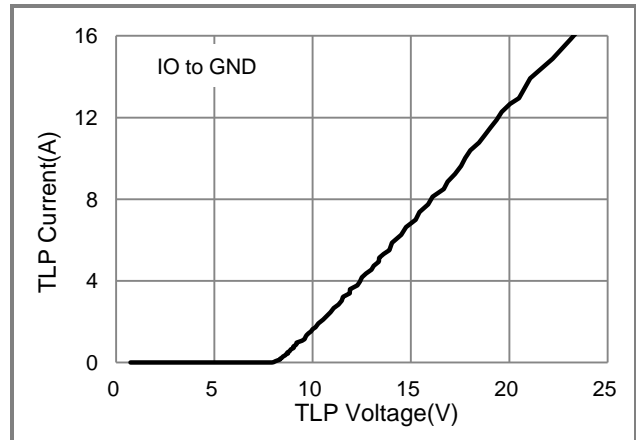


Fig.4 TLP Measurement



PE1605C4E6

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PE1605C4E6_R1_00001	SOT-563	4K / 7" Reel	KCC	Halogen Free

Packaging Information & Mounting Pad Layout

