



# PEC3107M1AQ

## Low Capacitance ESD Protection

**Voltage**

**7 V**



### Features

- IEC61000-4-2(ESD):  $\pm 30$  kV Air,  $\pm 30$  kV Contact
- IEC61000-4-4(EFT): 40 A(5/50 ns)
- IEC61000-4-5(Lightning): 5 A(8/20  $\mu$ S)
- Low leakage current, maximum of 1 $\mu$ A at rated voltage
- Ultra low capacitance
- Low clamping voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Mechanical Data

- Case: Molded plastic, DFN1006-2L
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00002 ounces, 0.0006 grams

DFN1006-2L



## Maximum Ratings and Thermal Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	$V_{ESD}$	$\pm 30$	kV
ESD IEC61000-4-2(Contact)		$\pm 30$	
Operating Junction Temperature Range	$T_J$	-55~150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~150	$^\circ\text{C}$



# PEC3107M1AQ

## Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage	$V_{RWM}^{(1)}$	-	-	-	7	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BR} = 1\text{ mA}$	7.5	-	10	V
Reverse Leakage Current	$I_R$	$V_R = 7\text{ V}$	-	-	1	$\mu\text{A}$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1\text{ A}, t_p = 8/20\text{ }\mu\text{s}$	-	-	12	V
		$I_{PP} = 5\text{ A}, t_p = 8/20\text{ }\mu\text{s}$	-	-	15	
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1\text{ MHz}$	-	-	15	pF

**NOTES:**

1. A transient suppressor is selected according to the working peak reverse voltage( $V_{RWM}$ ), which should be equal to or greater than the DC or continuous peak operation voltage level.



# PEC3107M1AQ

## TYPICAL CHARACTERISTIC CURVES

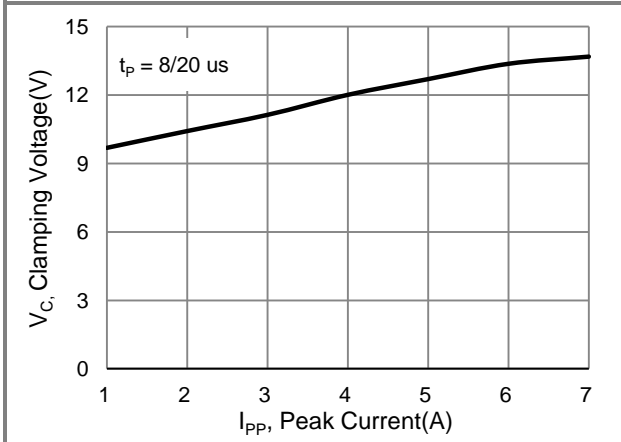


Fig.1 Typical Peak Clamping Voltage

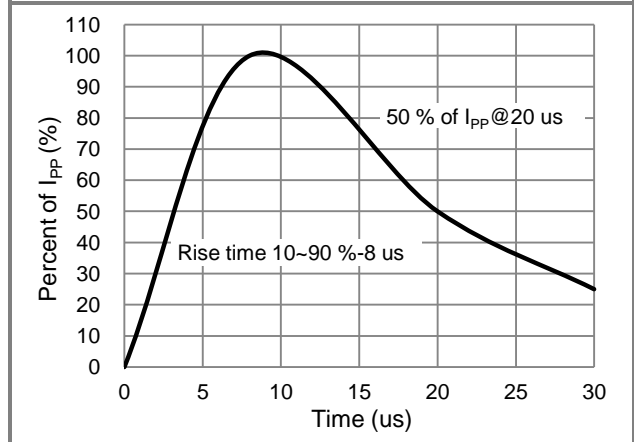


Fig.2 Pulse Waveform

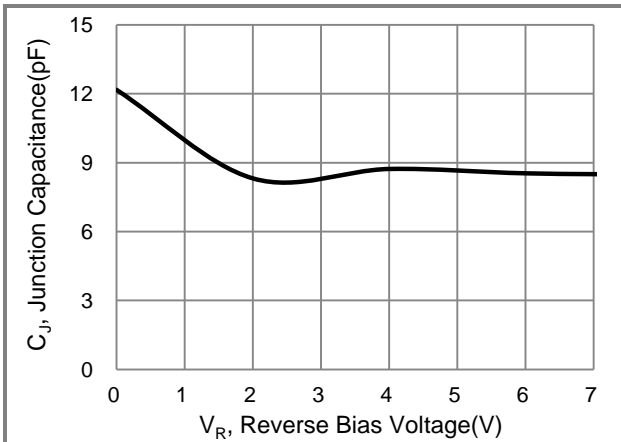


Fig.3 Typical Junction Capacitance



# PEC3107M1AQ

## Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PEC3107M1AQ_R1_00001	DFN1006-2L	10K / 7" Reel	K7	Halogen Free

## Packaging Information & Mounting Pad Layout

