



PJL9824

40V Dual N-Channel Enhancement Mode MOSFET

Voltage **40 V**


Current

13 A

Features

- $R_{DS(ON)}$, $V_{GS} @ 10V$, $I_D @ 10A < 5.5m\Omega$
- $R_{DS(ON)}$, $V_{GS} @ 4.5V$, $I_D @ 5A < 7.5m\Omega$
- High switching speed
- Improved dv/dt capability
- Low Gate Charge
- Low reverse transfer capacitance
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

SOP-8



Mechanical Data

- Case : SOP-8 package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0029 ounces, 0.083 grams

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current ^(Note 4)	I_D	13	A
$T_A = 70^\circ C$		10	
Pulsed Drain Current ^(Note 1)	I_{DM}	52	
Power Dissipation	P_D	1.7	W
$T_A = 70^\circ C$		1.1	
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~150	$^\circ C$
Typical Thermal Resistance - Junction to Ambient ^(Note 4,5)	$R_{\theta JA}$	73.5	$^\circ C/W$



PJL9824

Electrical Characteristics ($T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	40	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1	1.75	2.5	
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=10A$	-	4.2	5.5	$m\Omega$
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=5A$	-	5.3	7.5	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V, V_{GS}=0V$	-	-	1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Dynamic <small>(Note 6)</small>						
Total Gate Charge	Q_g	$V_{DS}=32V, I_D=10A,$ $V_{GS}=4.5V$ <small>(Note 2,3)</small>	-	25	-	nC
Gate-Source Charge	Q_{gs}		-	7	-	
Gate-Drain Charge	Q_{gd}		-	10	-	
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V,$ $f=1MHz$	-	1258	-	pF
Output Capacitance	C_{oss}		-	134	-	
Reverse Transfer Capacitance	C_{rss}		-	88	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=20V, I_D=1A,$ $V_{GS}=10V, R_G=3.3\Omega$ <small>(Note 2,3)</small>	-	18	-	ns
Turn-On Rise Time	t_r		-	13	-	
Turn-Off Delay Time	$t_{d(off)}$		-	109	-	
Turn-Off Fall Time	t_f		-	73	-	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I_s	---	-	-	13	A
Diode Forward Voltage	V_{SD}	$I_s=1A, V_{GS}=0V$	-	0.7	1	V

NOTES :

1. Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$
2. Essentially independent of operating temperature typical characteristics.
3. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}=150^\circ C$. Ratings are based on low frequency and duty cycles to keep initial $T_J = 25^\circ C$.
4. The maximum current rating is package limited.
5. R_{QJA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. Mounted on a 1 inch² with 2oz.square pad of copper.
6. Guaranteed by design, not subject to production testing.



PJL9824

TYPICAL CHARACTERISTIC CURVES

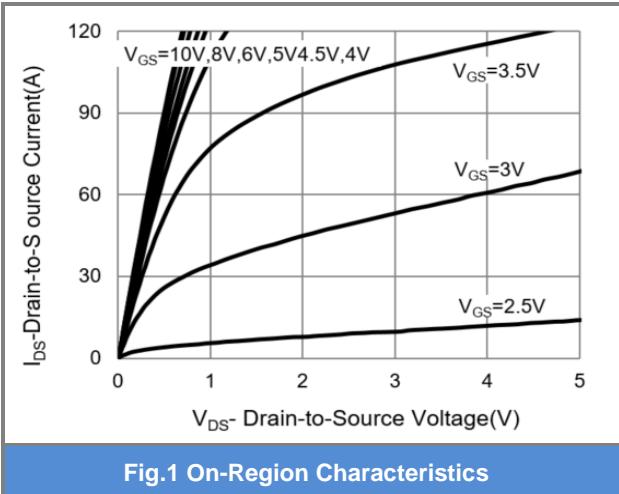


Fig.1 On-Region Characteristics

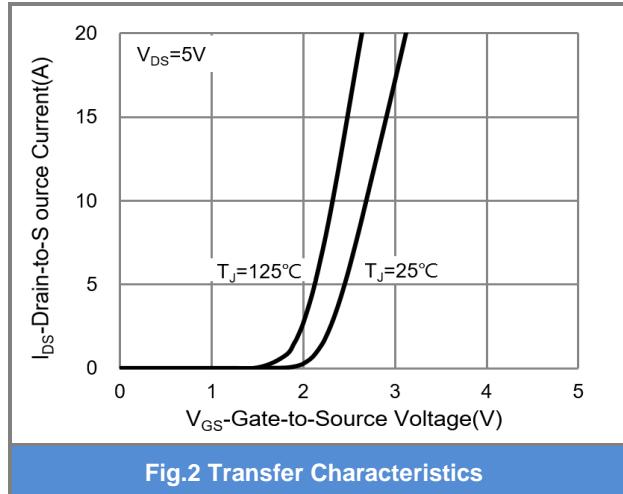


Fig.2 Transfer Characteristics

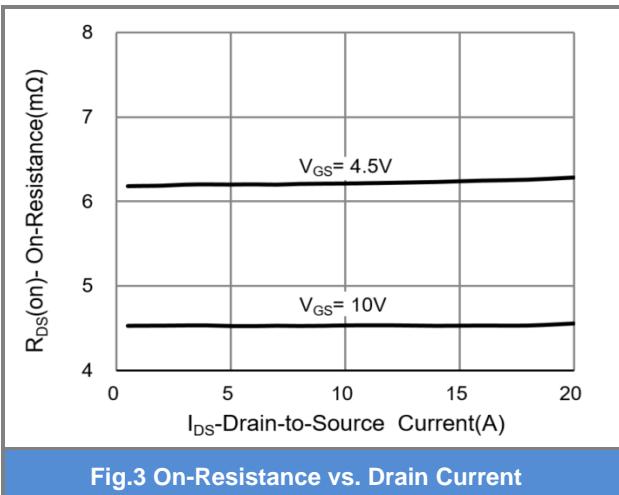


Fig.3 On-Resistance vs. Drain Current

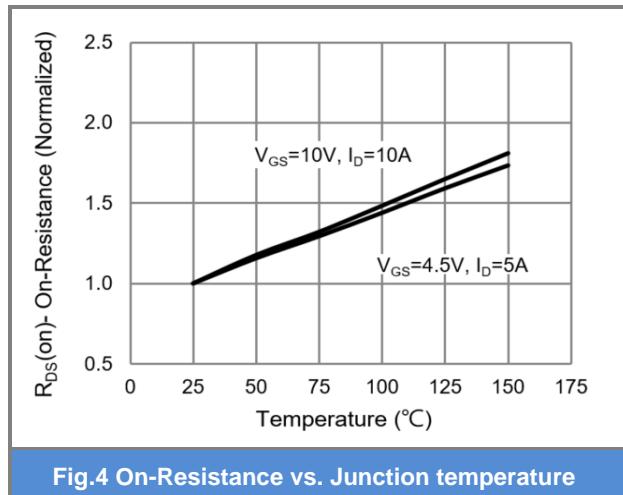


Fig.4 On-Resistance vs. Junction temperature

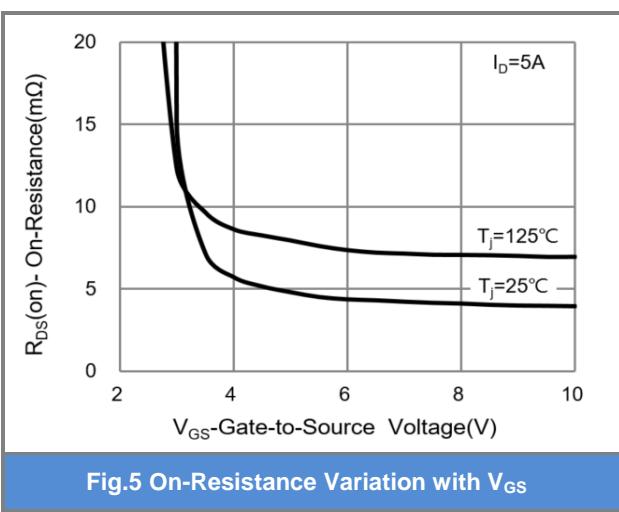


Fig.5 On-Resistance Variation with V_GS

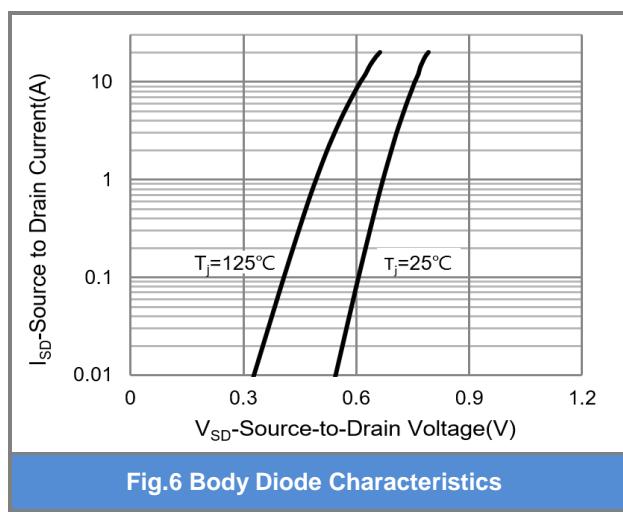


Fig.6 Body Diode Characteristics



PJL9824

TYPICAL CHARACTERISTIC CURVES

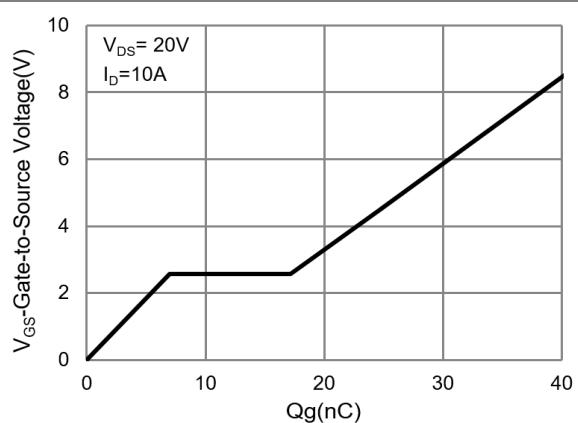


Fig.7 Gate-Charge Characteristics

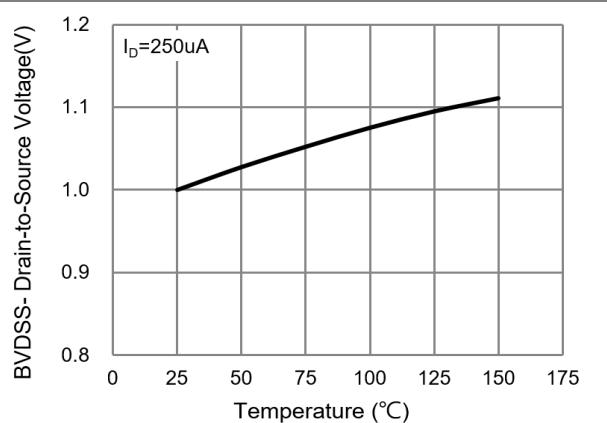


Fig.8 Breakdown Voltage Variation vs. Temperature

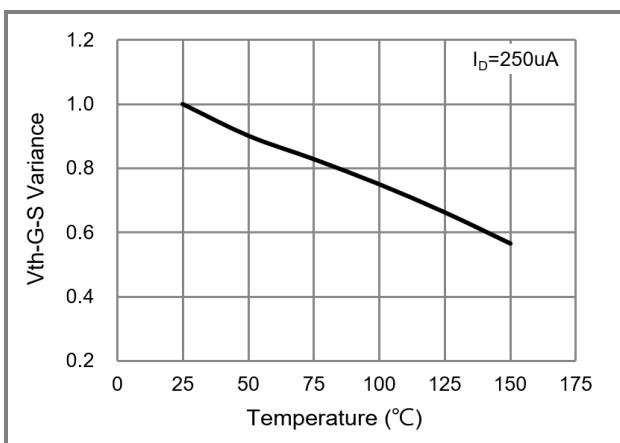


Fig.9 Threshold Voltage Variation with Temperature

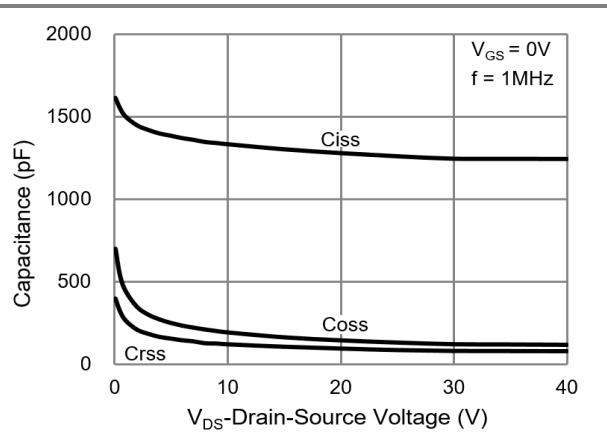


Fig.10 Capacitance vs. Drain-Source Voltage

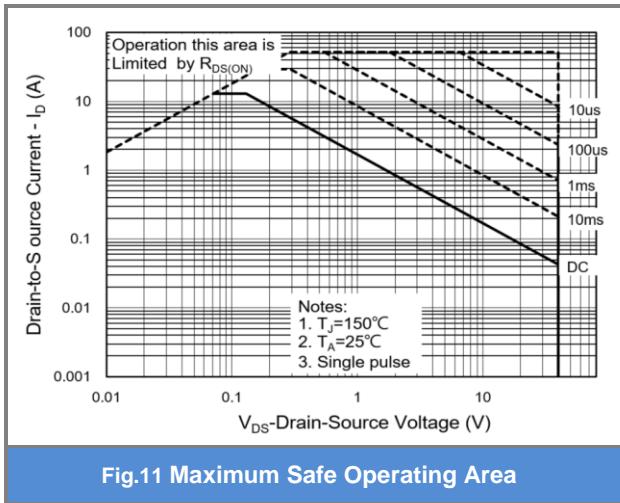


Fig.11 Maximum Safe Operating Area

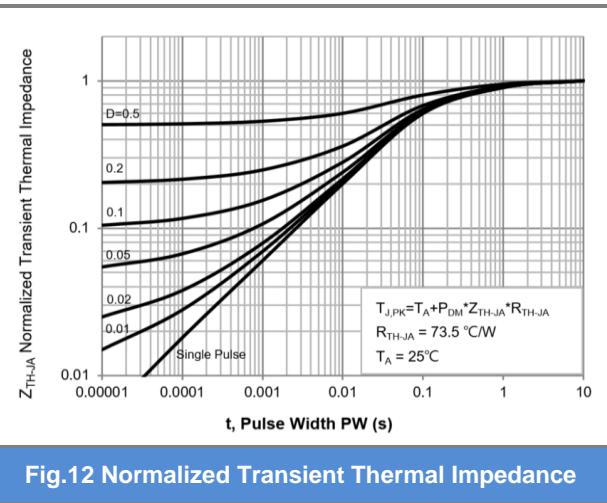


Fig.12 Normalized Transient Thermal Impedance



PJL9824

Part No Packing Code Version

Part No	Packing Code	Package Type	Packing Type	Marking	Version
PJL9824	R2_00001	SOP-8	2.5K pcs / 13" reel	L9824	Halogen free

Packaging Information & Mounting Pad Layout

