



# PJW3P10A

## 100V P-Channel Enhancement Mode MOSFET

Voltage    -100 V    Current    -2.6 A



### Features

- $R_{DS(ON)}$ ,  $V_{GS} @ -10V, I_D @ -2.6A < 210m\Omega$
- $R_{DS(ON)}$ ,  $V_{GS} @ -4.5V, I_D @ -1A < 230m\Omega$
- High switching speed
- Improved dv/dt capability
- Low Gate Charge
- Low reverse transfer capacitance
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Mechanical Data

- Case : SOT-223 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.043 ounces, 0.123grams
- Marking : W3P10A

SOT-223



### Maximum Ratings and Thermal Characteristics ( $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Drain-Source Voltage	$V_{DS}$	-100	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current <small><math>T_A=25^\circ C</math></small>	$I_D$	-2.6	A
		-2.0	
Pulsed Drain Current <small>(Note 1)</small>	$I_{DM}$	-10.4	A
Power Dissipation <small><math>T_A=25^\circ C</math></small>	$P_D$	3.1	W
		2	
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~150	$^\circ C$
Typical Thermal resistance - Junction to Ambient <small>(Note 5)</small>	$R_{\theta JA}$	40.3	$^\circ C/W$

- Limited only By Maximum Junction Temperature



## PJW3P10A

### Electrical Characteristics ( $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
<b>Static</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-100	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.0	-1.9	-3.0	V
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-2.6A$	-	170	210	$m\Omega$
		$V_{GS}=-4.5V, I_D=-1A$	-	190	230	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=-100V, V_{GS}=0V$	-	-	-1.0	$\mu A$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	$\pm 100$	nA
<b>Dynamic</b> <small>(Note 6)</small>						
Total Gate Charge	$Q_g$	$V_{DS}=-80V, I_D=-2.6A,$ $V_{GS}=-10V$ <small>(Note 1,2)</small>	-	20	-	nC
Gate-Source Charge	$Q_{gs}$		-	3.5	-	
Gate-Drain Charge	$Q_{gd}$		-	4.6	-	
Input Capacitance	$C_{iss}$	$V_{DS}=-25V, V_{GS}=0V,$ $f=1.0MHz$	-	1419	-	pF
Output Capacitance	$C_{oss}$		-	89	-	
Reverse Transfer Capacitance	$C_{rss}$		-	45	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=-50V, I_D=-2.6A,$ $V_{GS}=-10V, R_G=25\Omega$ <small>(Note 1,2)</small>	-	18	-	ns
Turn-On Rise Time	$t_r$		-	8	-	
Turn-Off Delay Time	$t_{d(off)}$		-	100	-	
Turn-Off Fall Time	$t_f$		-	30	-	
<b>Drain-Source Diode</b>						
Maximum Continuous Drain-Source Diode Forward Current	$I_S$	---	-	-	-2.6	A
Diode Forward Voltage	$V_{SD}$	$I_S=-1A, V_{GS}=0V$	-	-0.75	-1.2	V

#### NOTES :

1. Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$
2. Essentially independent of operating temperature typical characteristics.
3. The maximum current rating is package limited.
4. Repetitive rating, pulse width limited by junction temperature  $T_J(MAX)=150^\circ C$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J = 25^\circ C$ .
5.  $R_{QJA}$  is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. Mounted on a 1 inch<sup>2</sup> with 2oz.square pad of copper.
6. Guaranteed by design, not subject to production testing.



# PJW3P10A

## TYPICAL CHARACTERISTIC CURVES

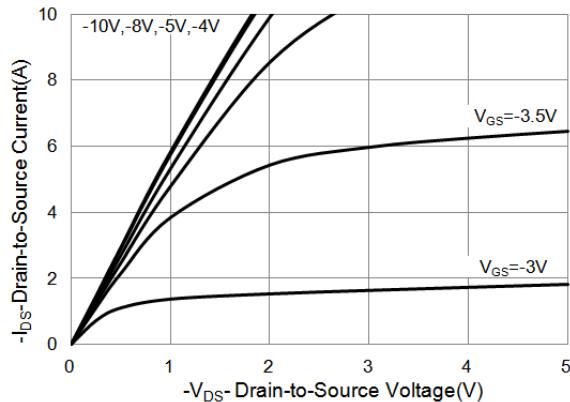


Fig.1 Output Characteristics

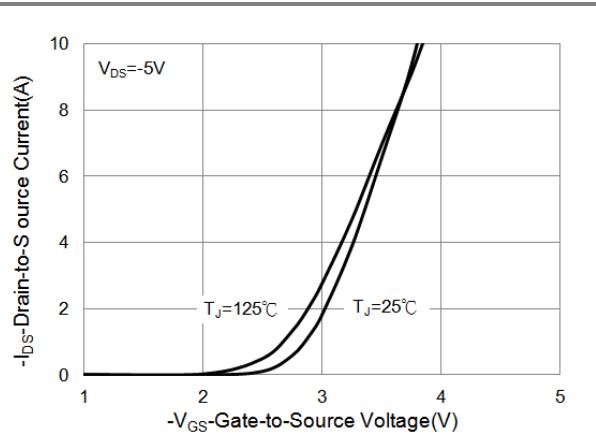


Fig.2 Transfer Characteristics

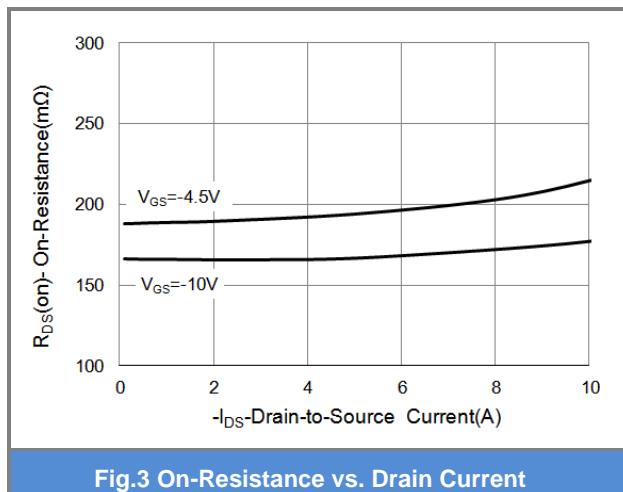


Fig.3 On-Resistance vs. Drain Current

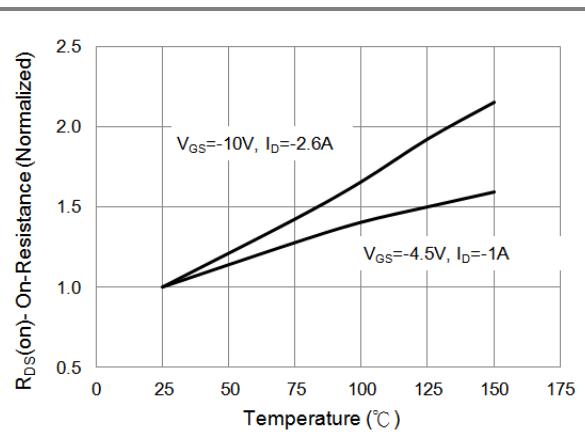


Fig.4 On-Resistance vs. Junction temperature

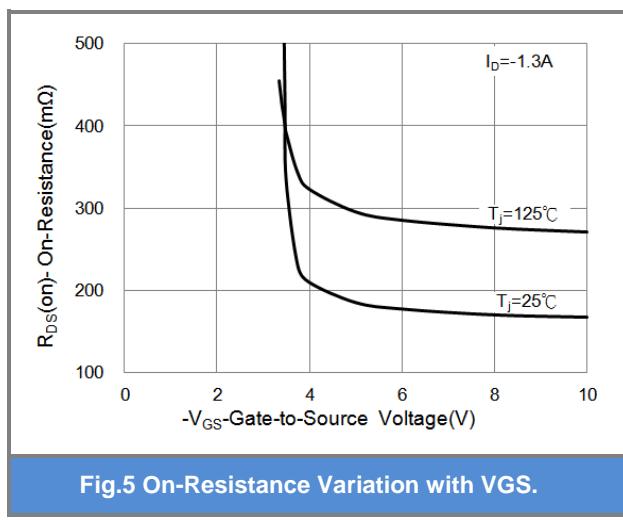


Fig.5 On-Resistance Variation with VGS.

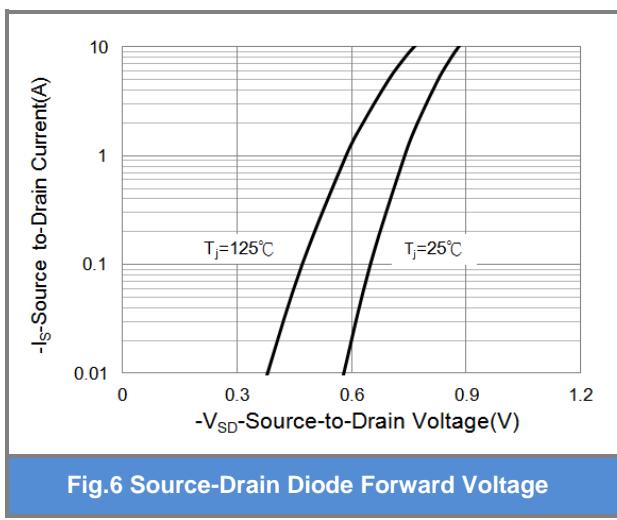


Fig.6 Source-Drain Diode Forward Voltage



# PJW3P10A

## TYPICAL CHARACTERISTIC CURVES

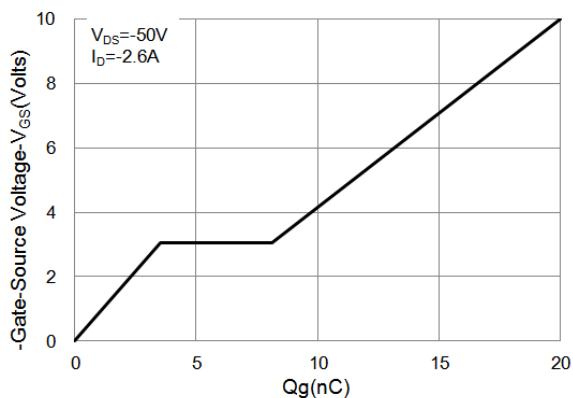


Fig.7 Gate-Charge Characteristics

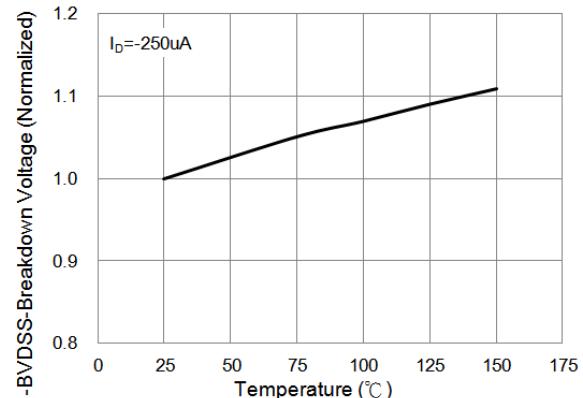


Fig.8 Breakdown Voltage Variation vs. Temperature

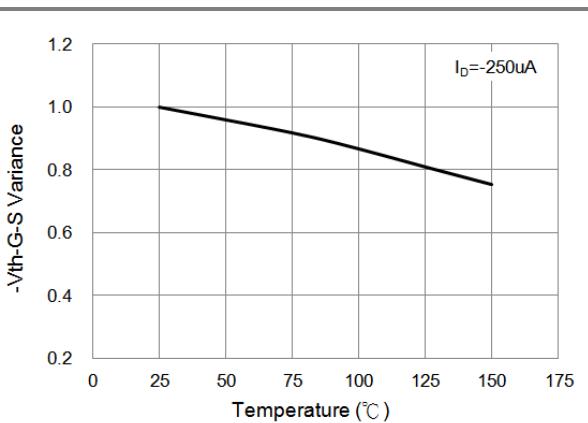


Fig.9 Threshold Voltage Variation with Temperature

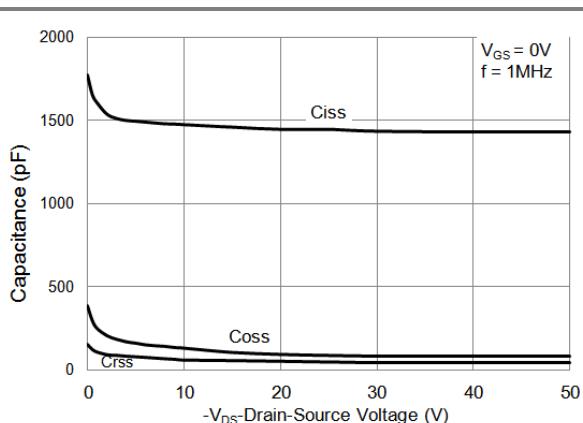


Fig.10 Capacitance vs. Drain-Source Voltage

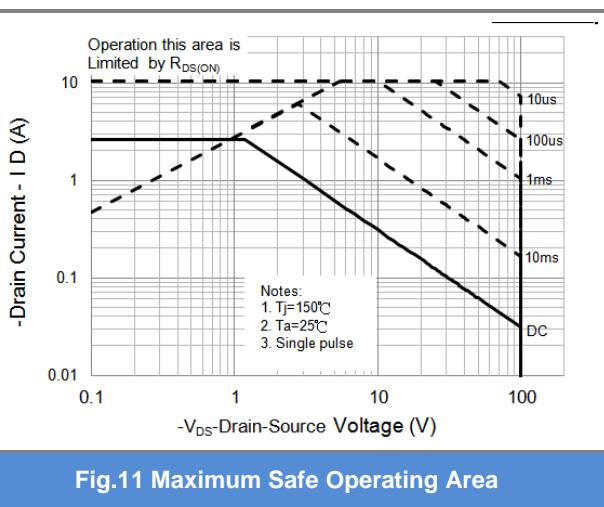


Fig.11 Maximum Safe Operating Area



# PJW3P10A

## TYPICAL CHARACTERISTIC CURVES


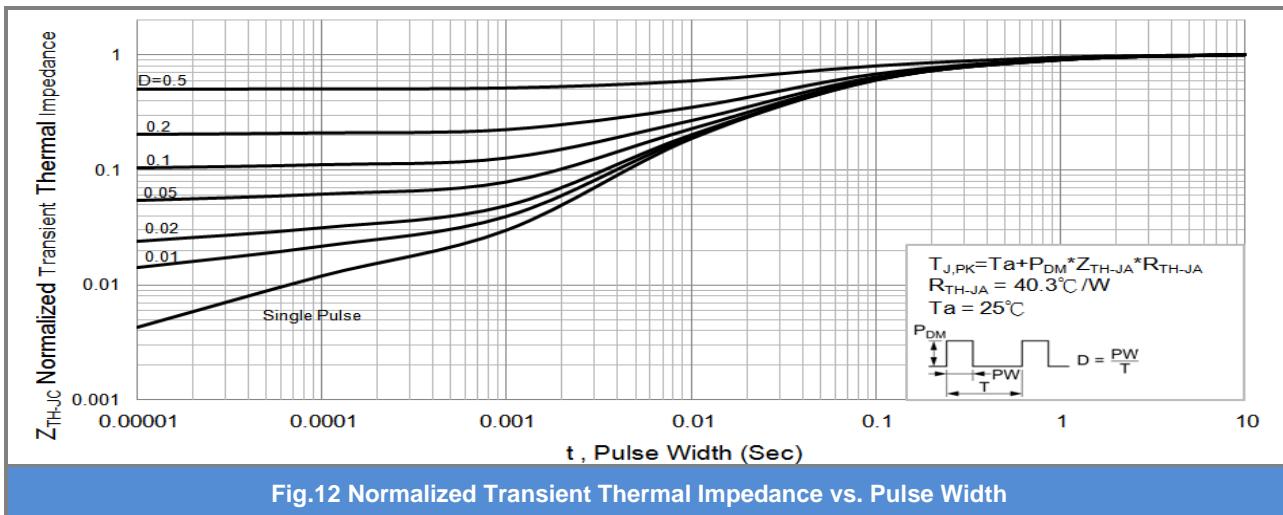


Fig.12 Normalized Transient Thermal Impedance vs. Pulse Width



## PJW3P10A

### Packaging Information

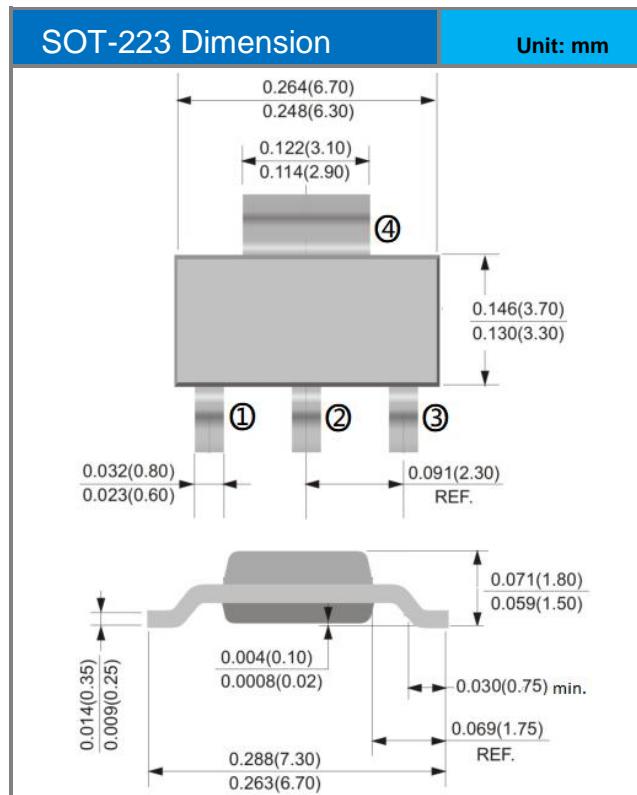



# PJW3P10A

## PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing Type	Marking	Version
PJW3P10A_R2_00001	SOT-223	2,500pcs / 13" reel	W3P10A	Halogen free

## MOUNTING PAD LAYOUT

