



PJW5N10-AU

100V N-Channel Enhancement Mode MOSFET

Voltage

100 V

Current

5 A



Features

- $R_{DS(ON)}$, $V_{GS}@10V$, $I_D@2.5A < 130m\Omega$
- $R_{DS(ON)}$, $V_{GS}@6V$, $I_D@1A < 135m\Omega$
- High switching speed
- Improved dv/dt capability
- Low Gate Charge
- Low reverse transfer capacitance
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : SOT-223 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.043 ounces, 0.123 grams

SOT-223

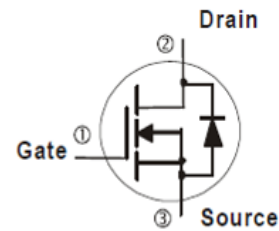

Maximum Ratings and Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V_{DS}	100	V
Gate-Source Voltage		V_{GS}	± 20	
Continuous Drain Current (Note 4)	$T_C=25^\circ\text{C}$	I_D	5	A
	$T_C=100^\circ\text{C}$		3.1	
Pulsed Drain Current (Note 1)	$T_C=25^\circ\text{C}$	I_{DM}	10	
Power Dissipation	$T_C=25^\circ\text{C}$	P_D	8	W
	$T_C=100^\circ\text{C}$		3.2	
Continuous Drain Current (Note 4)	$T_A=25^\circ\text{C}$	I_D	3.1	A
	$T_A=70^\circ\text{C}$		2.5	
Power Dissipation	$T_A=25^\circ\text{C}$	P_D	3.1	W
	$T_A=70^\circ\text{C}$		2	
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~150	$^\circ\text{C}$
Typical Thermal Resistance (Note 4,5)	Junction to Case	$R_{\theta JC}$	15.6	$^\circ\text{C/W}$
	Junction to Ambient	$R_{\theta JA}$	40.3	

- Limited only By Maximum Junction Temperature



PJW5N10-AU

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	100	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	2.76	3.5	
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=2.5A$	-	110	130	m Ω
		$V_{GS}=6V, I_D=1A$	-	120	135	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=100V, V_{GS}=0V$	-	-	1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Dynamic (Note 6)						
Total Gate Charge	Q_g	$V_{DS}=37.5V, I_D=5A,$ $V_{GS}=10V$ (Note 2,3)	-	12	-	nC
Gate-Source Charge	Q_{gs}		-	3.1	-	
Gate-Drain Charge	Q_{gd}		-	2.2	-	
Input Capacitance	C_{iss}	$V_{DS}=30V, V_{GS}=0V,$ $f=1MHz$	-	707	-	pF
Output Capacitance	C_{oss}		-	40	-	
Reverse Transfer Capacitance	C_{rss}		-	16	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=37.5V, R_L=7.5\Omega,$ $V_{GS}=10V, R_G=3\Omega$ (Note 2,3)	-	6	-	ns
Turn-On Rise Time	t_r		-	27	-	
Turn-Off Delay Time	$t_{d(off)}$		-	15	-	
Turn-Off Fall Time	t_f		-	7	-	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I_S	---	-	-	5	A
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$	-	0.78	1	V

NOTES :

1. Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.
2. Essentially independent of operating temperature typical characteristics.
3. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.
4. The maximum current rating is package limited.
5. $R_{\theta JA}$ is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. Mounted on a 1 inch² with 2oz.square pad of copper.
6. Guaranteed by design, not subject to production testing.



PJW5N10-AU

TYPICAL CHARACTERISTIC CURVES

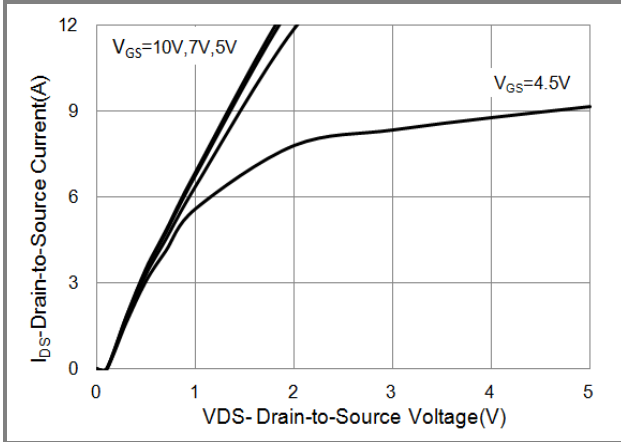


Fig.1 Output Characteristics

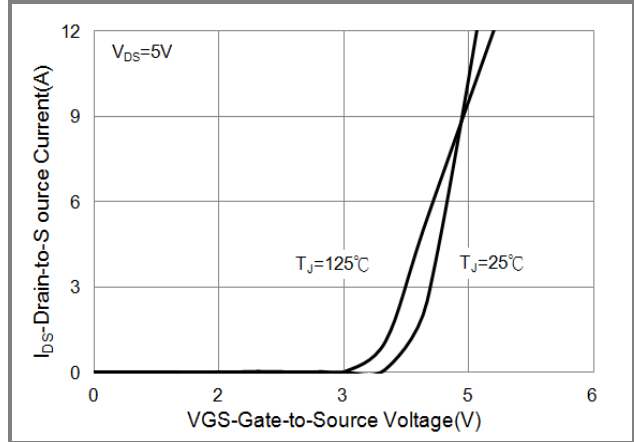


Fig.2 Transfer Characteristics

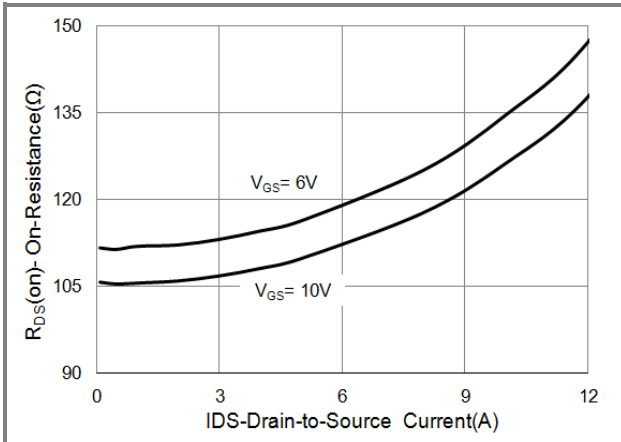


Fig.3 On-Resistance vs. Drain Current

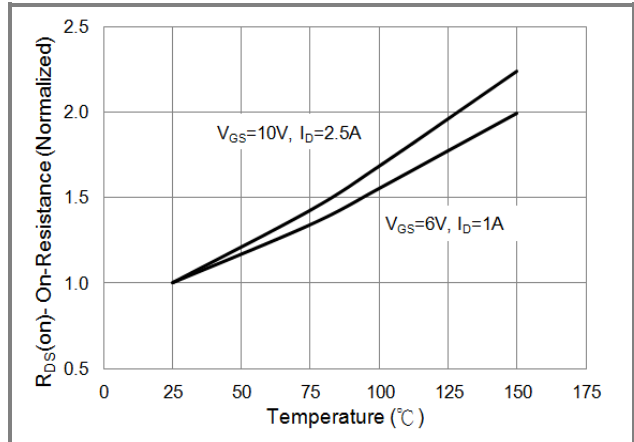


Fig.4 On-Resistance vs. Junction temperature

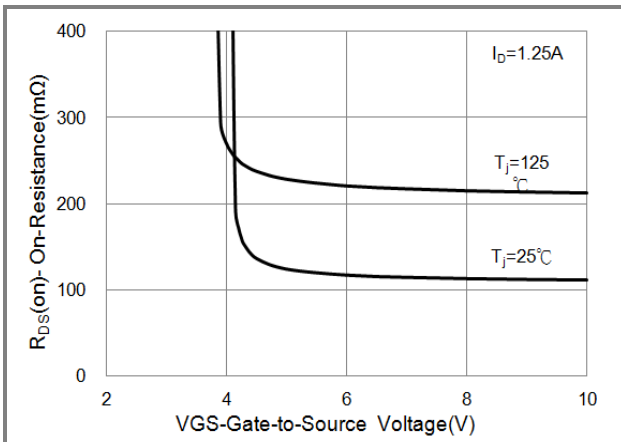


Fig.5 On-Resistance Variation with VGS

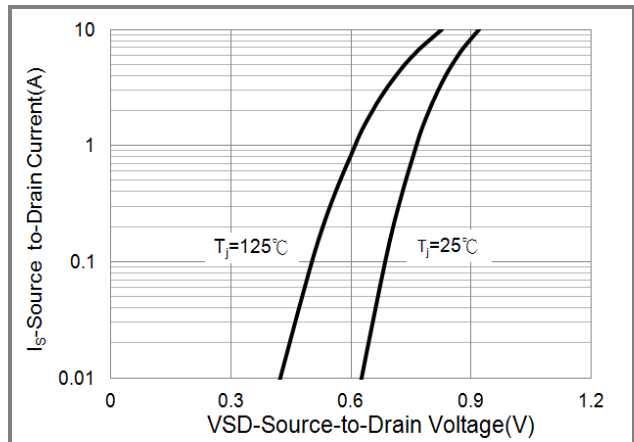


Fig.6 Source-Drain Diode Forward Voltage



PJW5N10-AU

TYPICAL CHARACTERISTIC CURVES

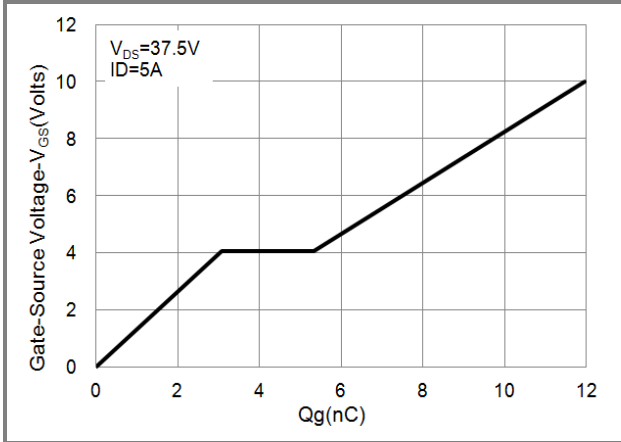


Fig.7 Gate-Charge Characteristics

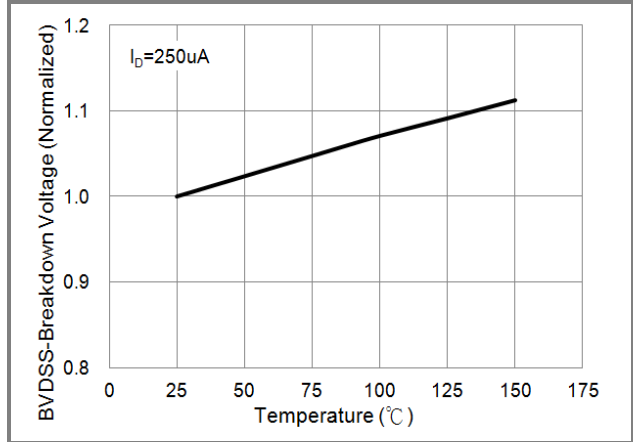


Fig.8 Breakdown Voltage Variation vs. Temperature

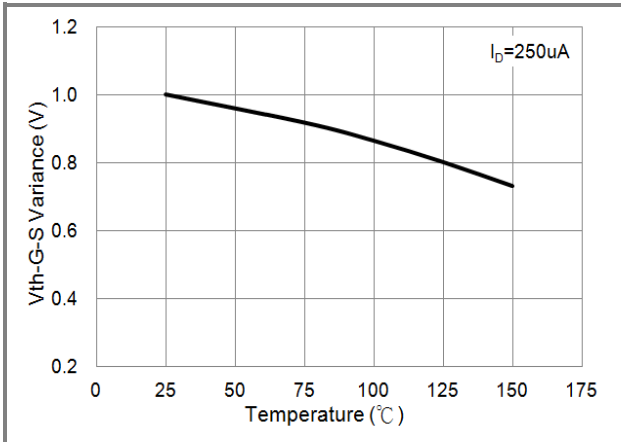


Fig.9 Threshold Voltage Variation with Temperature

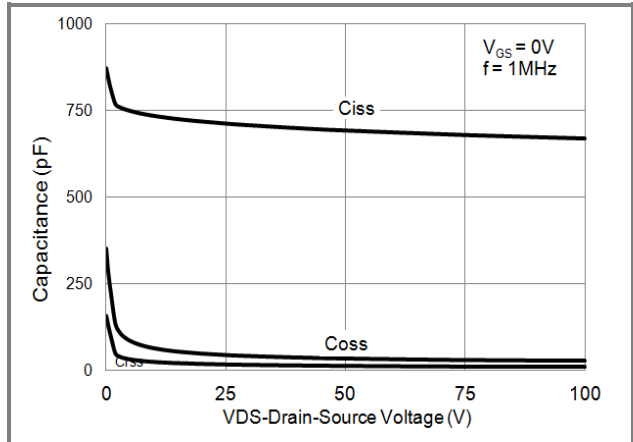


Fig.10 Capacitance vs. Drain-Source Voltage

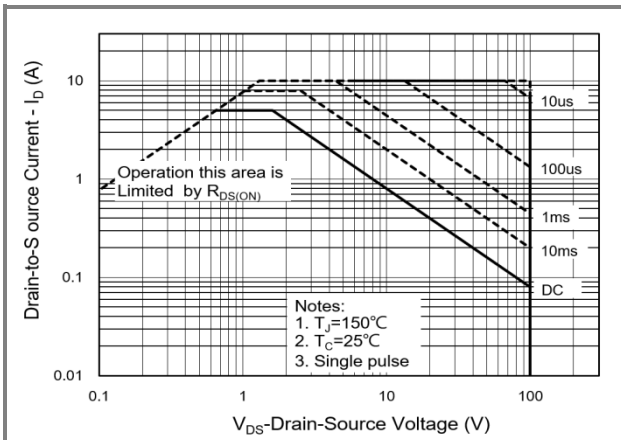


Fig.11 Maximum Safe Operating Area



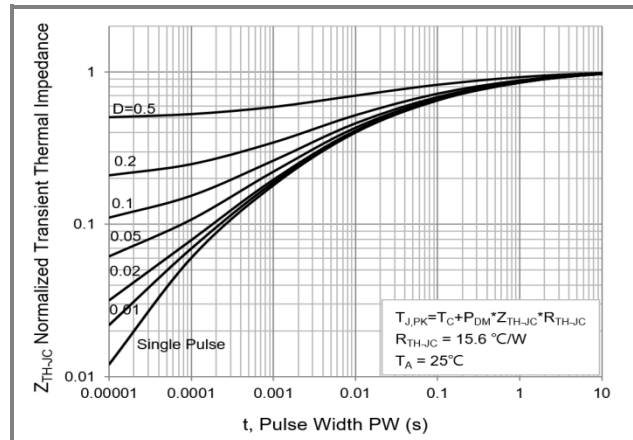


Fig.12 Normalized Transient Thermal Impedance

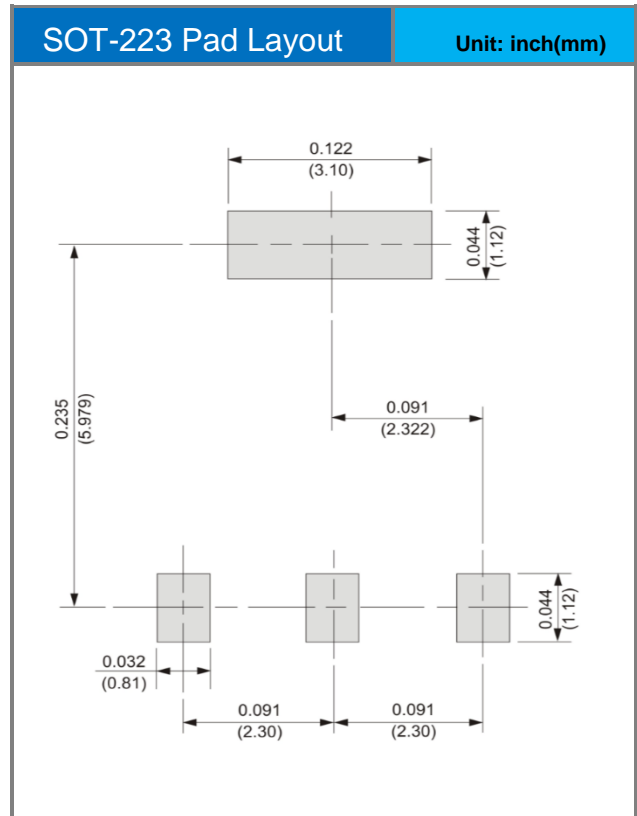

PJW5N10-AU

Packaging Information & Mounting Pad Layout

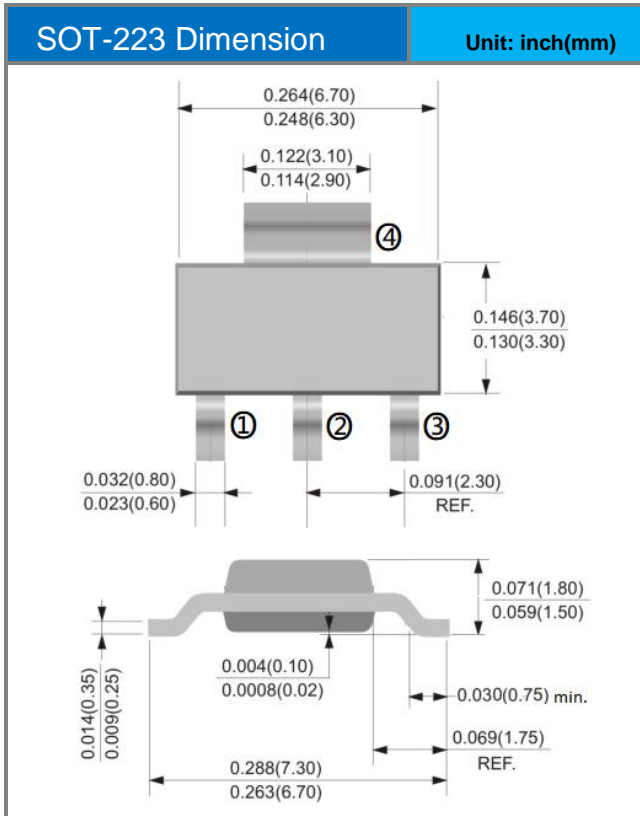



PJW5N10-AU

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PJW5N10-AU_R2_000A1	SOT-223	2,500pcs / 13" reel	W5N10	Halogen free