

- ⚙ Typical Applications: Telephone Sets, PBX's, DLC Systems, Central office Switches
- ⚙ Optimized insertion loss and return loss for audio frequency range, including voiceband
- ⚙ Designed for 600Ω line impedance
- ⚙ Frequency response: ± 0.5dB @300Hz~3.5KHz
- ⚙ Moisture Sensitivity Level: 1

Electrical Specifications @ 25 °C – Operating Temperature – 40°C to +85 °C

Part Number	Primary Impedance 1KHz/1.0Vrms SEC @600 Ω (Ω ±10%)	Insertion Loss 1KHz/1.0Vrms (dB MAX)	DCR (Ω MAX)		Turns Ratio (±2%)	Hi-Pot @1.0mA / 1s (VAC MIN)
			(2-4)	(7-9)		
PL3141	600	1.5	55	67	(2-4):(7-9)	Pri : Sec
					1:1	1000



Note: 1. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL3141 becomes **PL3141T**).

2. Suffix "NL" for RoHS (Sn100 Lead Finish); i.e. **PL3141NL**

Mechanical

Electrical Schematic

PL3141

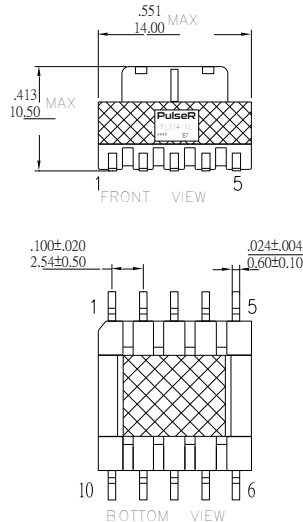

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are: ± $\frac{.010}{0.25}$

For More Information

iNRCORE, LLC
 311 Sinclair Road Bristol,
 PA 19007-6812 U.S.A
 Tel: + 1.215.781.6400
 Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

