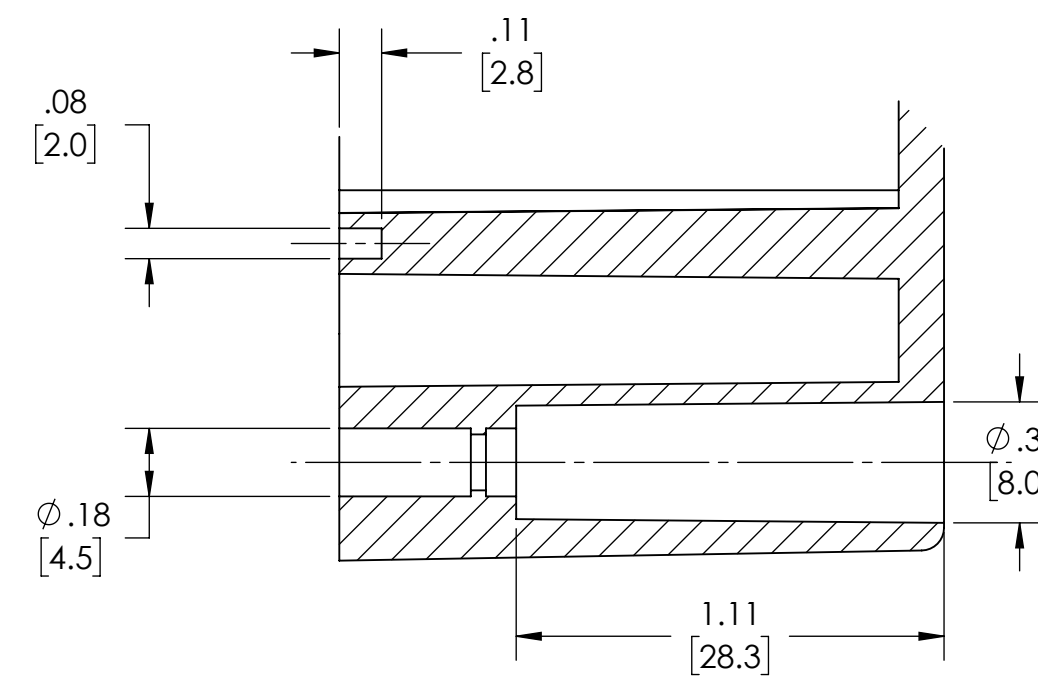
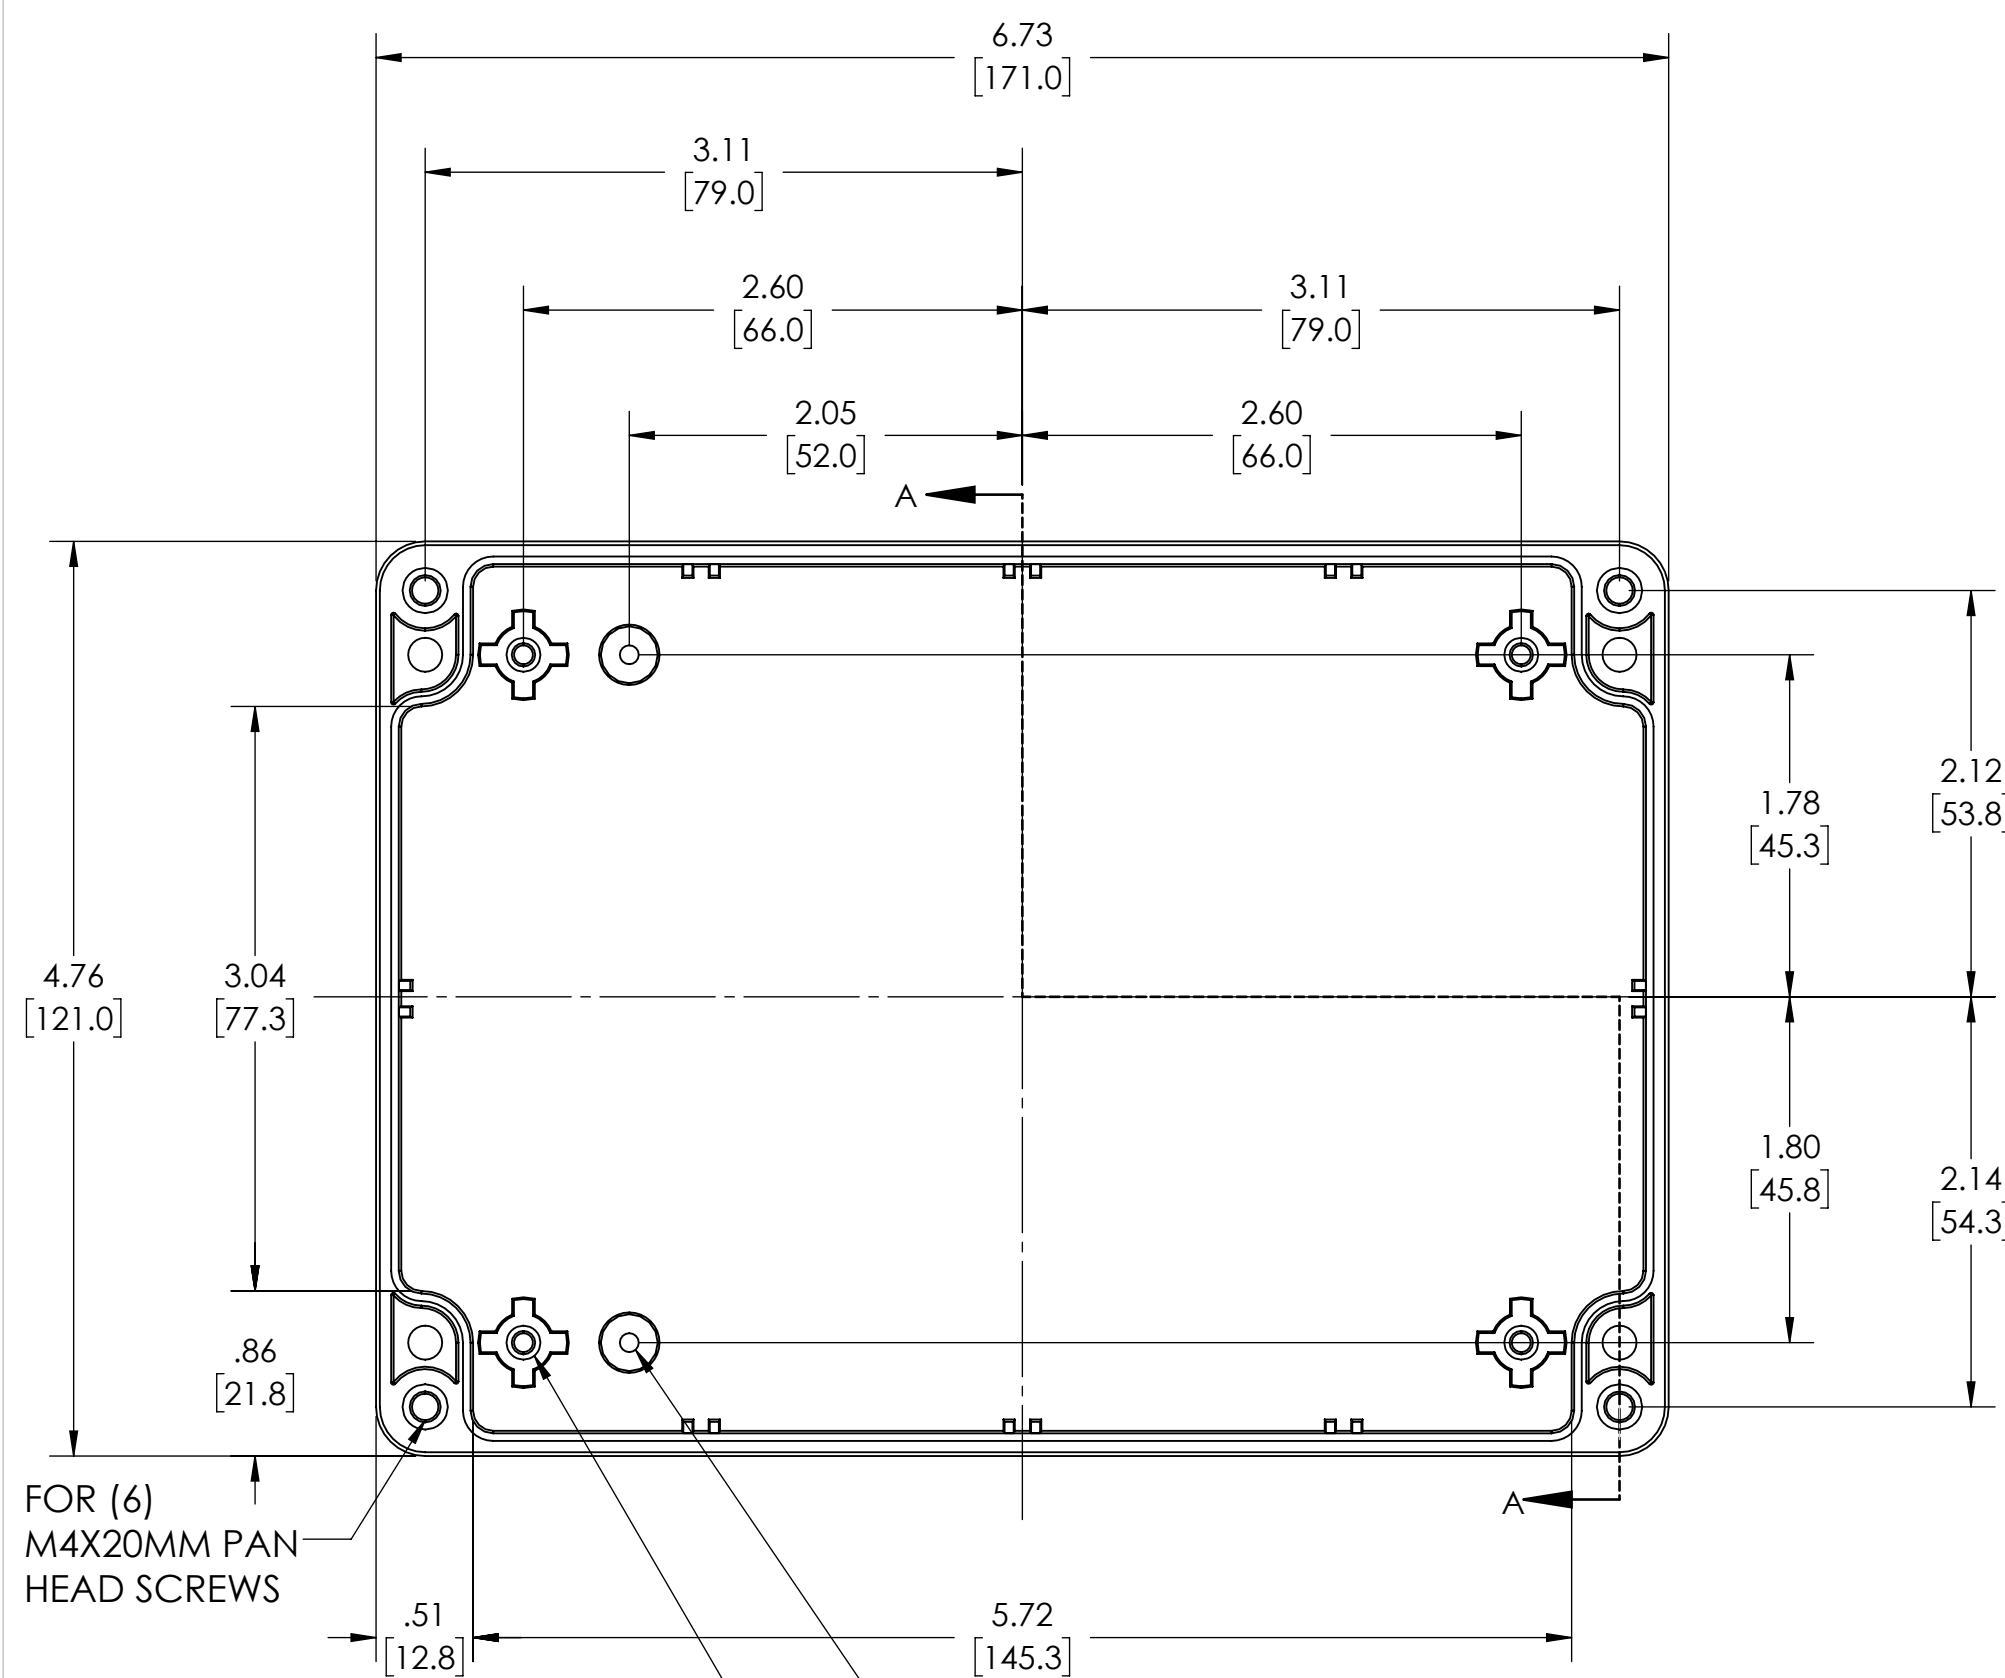
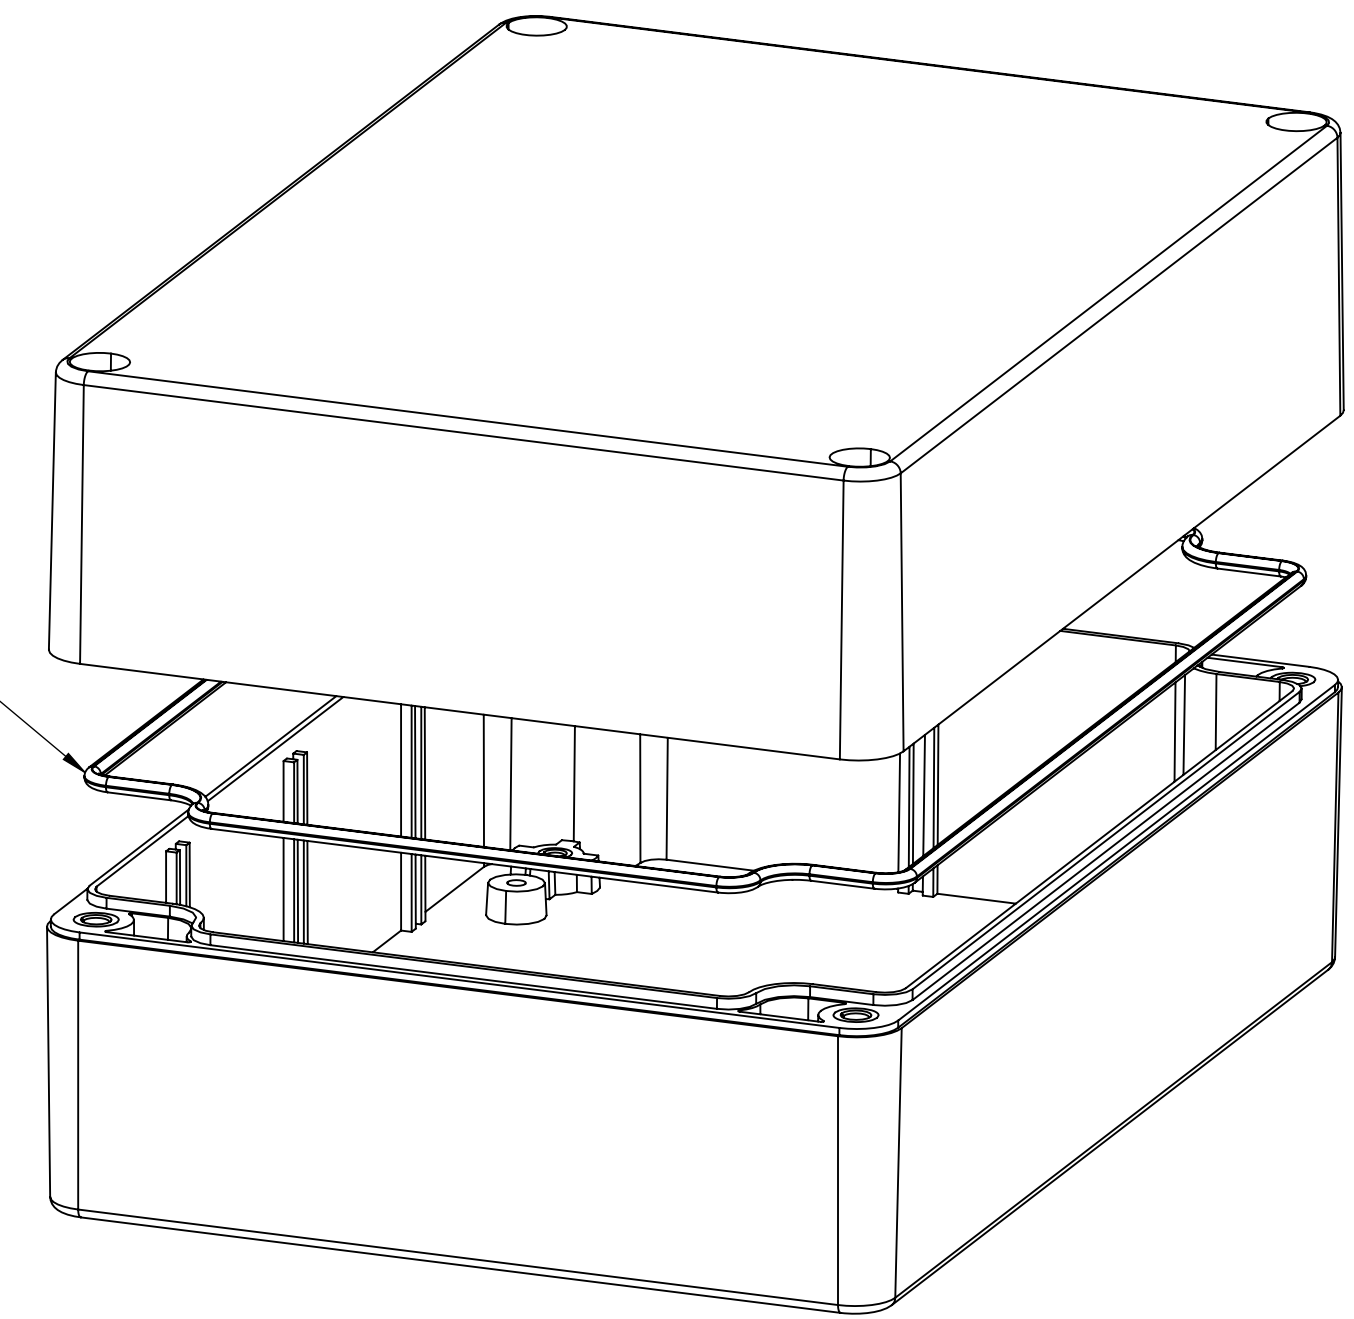


NOTES:


1. MATERIAL AND FLAMMABILITY.
POLYCARBONATE (LIGHT GRAY AND CLEAR) - UL94-HB
BODY, COVER AND CLEAR COVER (C)
FLAMMABILITY RATING (UL FILE #E41613)
SERVICE TEMPERATURE RANGE: -40°C TO +120°C
2. UL 508A (E352997) UL CERT OF COMPLIANCE.: BOXES UL LISTED
NEMA TYPE 6P STANDARD. DESIGNED MEETS IP68 OF IEC529
REQUIREMENTS. PC VERSION UV RESISTANT FOR OUT DOOR USE.
3. GASKET (NOT INSTALLED) MOLDED SILICONE WHITE
4. DIMENSIONS ARE INCH

 GASKET (NOT INSTALLED)
MOLDED SILICONE WHITE

 DETAIL C
SCALE 2 : 1

 FOR (6)
M4X20MM PAN
HEAD SCREWS


 M3X6 TAPPING SCREWS X 4
(SCREWS NOT SUPPLIED)

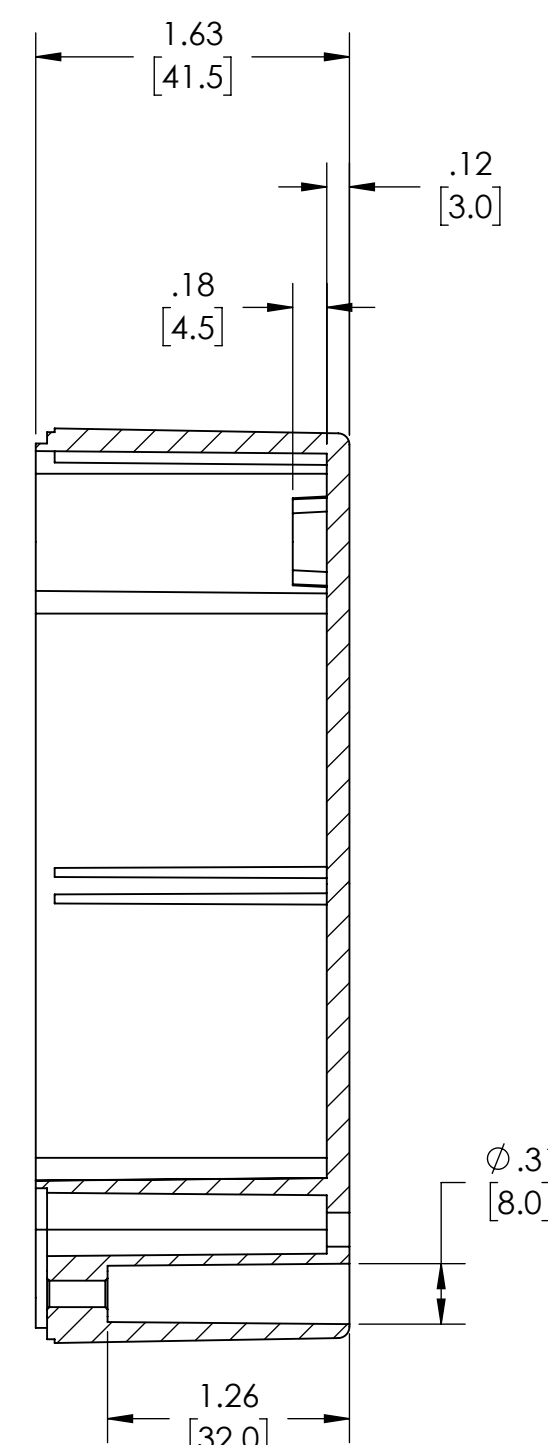 M3X5 THREADED
INERTS X 4 (SCREWS
NOT SUPPLIED)


BODY



SECTION A-A

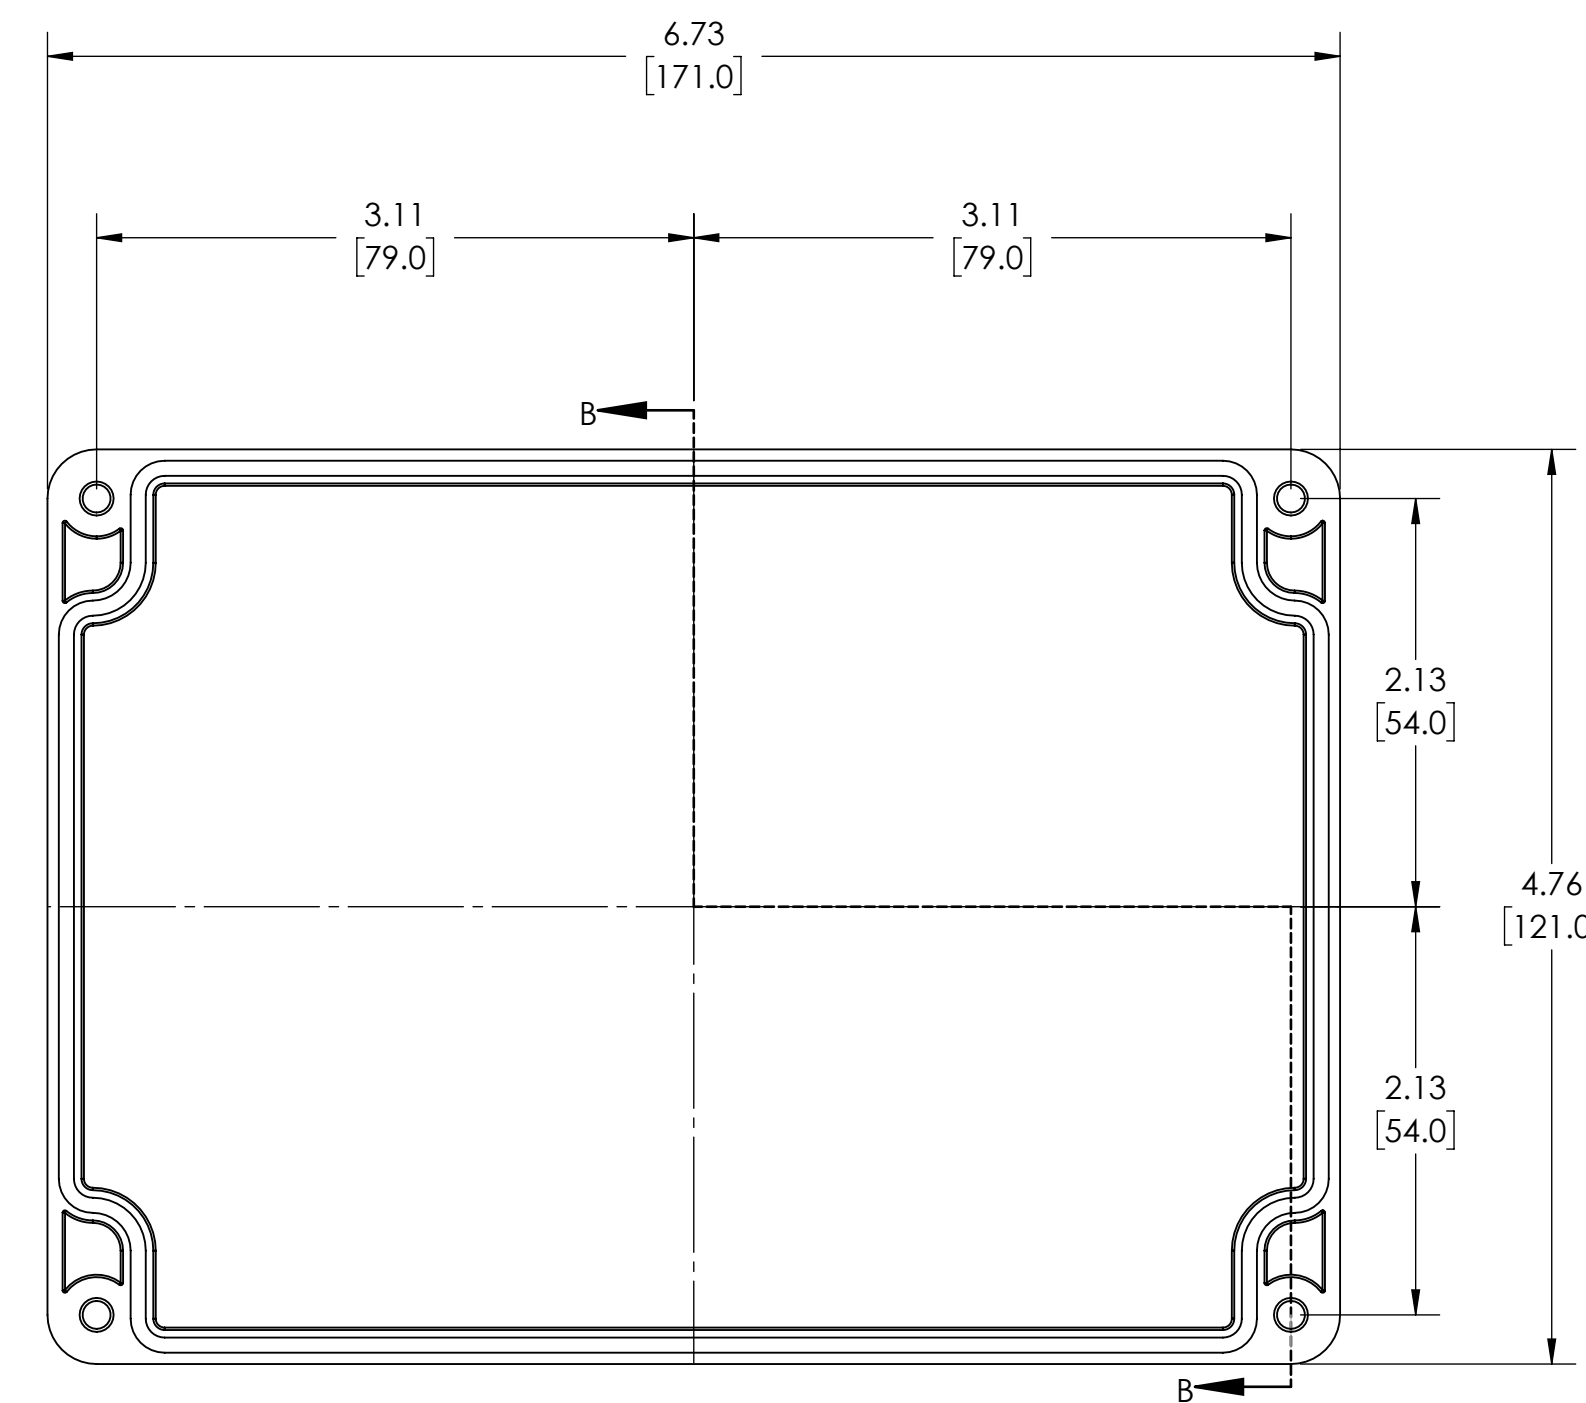

COVER

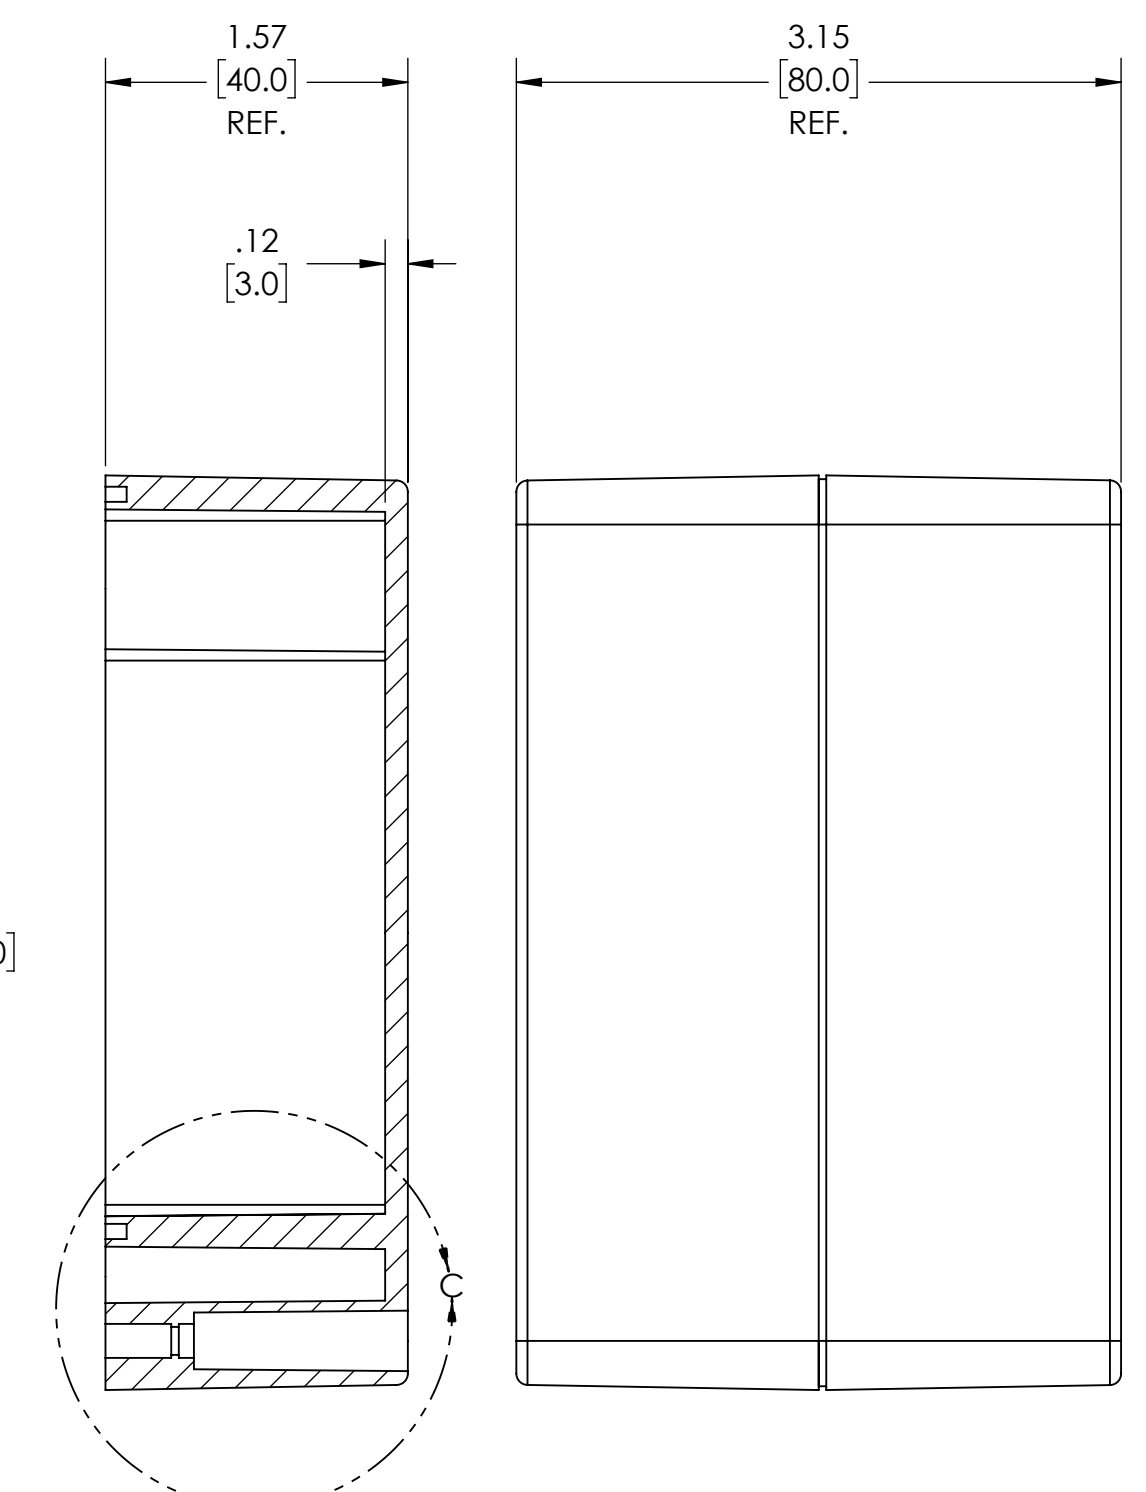

SECTION B-B

DRAWING FOR REFERENCE

 WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR
STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES
PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.