

**A 2x2 MiMo LTE and WIFI multi purpose shark fin antenna for GNSS, GPS, 2G/3G/4G/5G and dual WIFI 2.4/5.8 GHz**

**DESCRIPTION**

- Can be configured as 3in1, 4in1 and 5in1
- In-built 2x2 MiMo LTE antenna (617 - 960 MHz and 1710 - 3800 MHz)
- 2x2 MiMo Dual WiFi 2.4 and 5.8 GHz.
- GNSS antenna for GPS L1, Glonass, Beidou and Galileo.
- Model available with optional antenna for GPS L1.
- Supports external whip.
- No diplexer needed.
- The ProFinPlus provides antennas for multiple technologies.
- The ProFinPlus covers , 4G, GNSS, GPS L1, inc. 5G cellular bands, dual WIFI 2.4 and 5.8 GHz and an optional whip.
- The ProFinPlus can support antenna whip in the range 66 - 520 MHz.
- All ProFinPlus configurations are prepared for external whip.
- Easily removable whip for car wash.
- Full hemispherical coverage for the GNSS and GPS (optional).
- Built-in high gain, low noise amplifier.
- Preselector filter ensures high GNSS/GPS amplifier blocking level for out-of-band signals.
- Right-Hand Circular Polarization.
- 3 - 15 V DC for GNSS/GPS supply.
- DC supply via GNSS or GPS RF-connector.
- ECE R118.02 approved cable.



SHOWN WITH OPTIONAL EXTERNAL WHIP.



**SPECIFICATIONS**

| Electrical              |  |
|-------------------------|--|
| Model                   | ProFin Plus  |
| Frequency               | 4G/5G 2x2 MiMo : 617 - 960 MHz, 1710 - 3800 MHz<br>WIFI 2x2 MiMo : 2400 - 2500 MHz, 5000 - 6000 MHz                    |
| Antenna Type            | Mobile Shark Fin Style Antenna   |
| Max. Input Power        | 25 W for 4G/5G and WIFI<br>100 W for whip  |
| Polarisation            | Vertical   |
| Impedance               | 50 Ω   |
| Gain (peak)             | 4G/5G 4dBi (617 - 960 MHz)<br>4G/5G 7dBi (1710 - 3800 MHz)<br>WIFI 6 dBi (2.4 GHz & 5.8 GHz)                           |
| Isolation               | (With 5m RG58)<br>>10 dB for 617 - 960MHz<br>>20 dB for 1710 - 3800MHz<br>>25 dB for WIFI                              |
| Correlation Coefficient | < 0.4 for 617 - 700 MHz<br>< 0.25 for 700 - 960 MHz<br>< 0.1 for 1710 - 3800 MHz                                       |
| VSWR                    | < 2.2:1 for 617 - 960 MHz<br>< 2.0:1 for 1710 - 3800 MHz<br>< 2.0:1 for 2400 - 2500 MHz<br>< 2.0:1 for 5000 - 6000 MHz |
| Mechanical              |  |
| Compliance              | ECE R118.02 approved cable   |
| Antenna Colour          | Black (RAL 9005)   |
| Connection(s)           | SMA(m) (all antennas)  |
| Materials               | Reinforced PA, Zamak 5   |
| Installation Torque     | 4 ± 0.5 Nm   |
| Dimensions              | Approx. 83 x 173 mm / 3.3 x 6.8 in.  |
| Max. Roof Thickness     | 3 mm / 0.12 in.  |
| Whip Connection         | M5   |
| Height                  | Approx. 66 mm/ 2.6 in.   |
| Weight                  | Approx. 0.35 kg / 0.77 lb.   |
| Mounting                | 18.5 mm / 0.8 in. dia. hole<br>Max roof curvature: 2.0 mm / 0.08 in.<br>(on 173 mm)                                    |

| Environmental                        |   |
|--------------------------------------|---|
| Operating temperature range          | -50 °C to +75 °C  |
| Water Resistance                     | IP67  |
| GPS Antenna                          |   |
| P1dB (GPS Amplifier)                 | Approx. 7 dBm   |
| Noise Figure (GPS Amplifier)         | < 1.5 dB (typ. 1.1 dB)  |
| Gain (GPS Amplifier)                 | 22 dB ± 2 dB  |
| Selectivity (GPS Amplifier)          | > 25 dB down @ 0 - 1535 MHz<br>> 25 dB down @ 1635 - 3000 MHz |
| VSWR (GPS Amplifier)                 | < 2.0:1   |
| Frequency (GPS)                      | 1575 MHz  |
| Power Supply (GPS)                   | 3 - 15 V DC   |
| Current Consumption (GPS Amplifier)  | < 12 mA   |
| Polarisation (GPS)                   | RH Circular   |
| Impedance (GPS)                      | 50 Ω  |
| GNSS Antenna                         |   |
| P1dB (GNSS Amplifier)                | Approx. 7 dBm   |
| Noise Figure (GNSS Amplifier)        | 1.6 dB (typ.)   |
| Cross Polar Discrimination (GNSS)    | > 10 dB (typ.)  |
| Gain (GNSS Amplifier)                | 28 dB (typ.) ic in axial direction (typ.)                     |
| Selectivity (GNSS Amplifier)         | > 25 dB down @ 0 - 1540 MHz<br>> 27 dB down @ 1625 - 3000 MHz |
| VSWR (GNSS Amplifier)                | < 2.0:1   |
| Frequency (GNSS)                     | 1559 - 1609 MHz (GPS L1, Glonass, Beidou and Galileo)         |
| Power Supply (GNSS)                  | 3 - 15 V DC   |
| Current Consumption (GNSS Amplifier) | Approx. 20 mA   |
| Polarisation (GNSS)                  | RH Circular   |
| Impedance (GNSS)                     | 50 Ω  |

ORDERING

| Model                         | Product No. | Description  |
|-------------------------------|-------------|--|
| ProFin Plus G1                | 130002476   | 2 x 4G/5G, 2 x WiFi, GNSS  |
| ProFin Plus G2                | 132000269   | 2 x 4G/5G, 2 x WiFi, GNSS, GPS (L1)                                      |
| <b>Accessories - Whips</b>    |             |  |
| MP-SS-S/FM whip               | 132000244   | Stainless steel whip with shock spring.                                  |
| MP-SS-S/DAB whip              | 132000260   | Stainless steel whip with shock spring.                                  |
| MP-SS-S/150 whip              | 132000245   | Stainless steel whip with shock spring. (Adjustable by customer)         |
| MP-B/450/405 MHz whip         | 132000247   | Flexible whip (0dB acc.to TIA-329.2-C                                    |
| MP-B/450/445 MHz whip         | 132000248   | Flexible whip (0dB acc.to TIA-329.2-C                                    |
| MP-SS/450-4/395 MHz whip      | 132000249   | Stainless steel collinear whip (4 dB acc. to TIA-329.2-C)                |
| MP-SS/450-4/425 MHz whip      | 132000250   | Stainless steel collinear whip (4 dB acc. to TIA-329.2-C)                |
| MP-SS/450-4/455 MHz whip      | 132000251   | Stainless steel collinear whip (4 dB acc. to TIA-329.2-C)                |
| MP-G-S/150/450/... whip       | 132000224   | Flexible whip with shock spring (factory adjusted)                       |
| MP-G-S/450/FM/395 whip        | 132000256   | Flexible whip with shock spring (factory adjusted)                       |
| <b>Accessories - Cables</b>   |             |  |
| 5m ProFin Plus Cable Kit      | 132000270   | "7 pcs. RG174 cables in one cable bundle. Provides ease of installation" |
| 3m SMA(f)-BNC(m)              | 130002416   | RG 58 A/U-L cable  |
| 4m SMA(f)-BNC(m)              | 130002417   | RG 58 A/U-L cable  |
| 5m SMA(f)-BNC(m)              | 130002418   | RG 58 A/U-L cable  |
| 3m SMA(f)-TNC(m)              | 130002421   | RG 58 A/U-L cable  |
| 4m SMA(f)-TNC(m)              | 130002422   | RG 58 A/U-L cable  |
| 5m SMA(f)-TNC(m)              | 130002423   | RG 58 A/U-L cable  |
| 3m SMA(f)-SMA(m)              | 130002426   | RG 58 A/U-L cable  |
| 4m SMA(f)-SMA(m)              | 130002427   | RG 58 A/U-L cable  |
| 5m SMA(f)-SMA(m)              | 130002428   | RG 58 A/U-L cable  |
| <b>Accessories - Adaptors</b> |             |  |
| SMA(f)-N(m)                   | 130002429   |  |
| SMA(f)-BNC(m)                 | 130002430   |  |
| SMA(f)-TNC(m)                 | 130002431   |  |
| SMA(f)-SMB(m)                 | 130002432   |  |
| SMA(f)-QMA(m)                 | 130002522   |  |

NOMENCLATURE


Use the guide below to configure the ProFin Plus you would like to order.

| Model Name            | No. of GNSS | No. of LTE antennas | No. of WIFI antennas | Cable length(m)   | Connectors on LTE                 | Connectors on WIFI  | Connectors on GNSS                |
|-----------------------|-------------|---------------------|----------------------|---|-----------------------------------|---|-----------------------------------|
| ProFin Plus           | G1<br>G2    | -L2                 | -W2                  | Blank (approx. 0.3 m / 1 ft cable length)<br>-P5 (5 m / 16.4 ft cable length) | -S (SMA-M)<br>-FAKRA (on request) | /S (SMA-M)<br>/RP-S (Reverse Polarity SMA-M)<br>/FAKRA (on request) | /S (SMA-M)<br>/FAKRA (on request) |
| <b>Naming Example</b> |             |                     |                      |   |                                   |   |                                   |
| ProFin Plus           | G1          | -L2                 | -W2                  | -P5   | -S                                | /S  | /S                                |

Example

ProFin Plus G1-L2-W2-P5-S/S/S

FAKRA CONNECTORS



Amphenol RF FAKRA connectors are available for this product in standard key code configurations. Please contact us with configuration details for availability.


FAKRA Connectors - RF Connectors | Amphenol RF

ORDERING DESIGNATIONS - WHIP MATRIX

| TYPE                       | DESCRIPTION  | FM<br>88-108 MHz | VHF<br>144..240 MHz | UHF<br>380..470 MHz | UHF (Gain)<br>380..470 MHz |
|----------------------------|--|------------------|---------------------|---------------------|----------------------------|
| MP-SS-S/FM whip            | Stainless steel whip with shock spring.                      | ◆                |                     |                     |                            |
| MP-SS-S/150 whip           | Stainless steel whip with shock spring.                      | ◆                | ◆                   |                     |                            |
| MP-SS-S/DAB whip           | Stainless steel whip with shock spring.                      | ◆                | ◆                   |                     |                            |
| MP-B/450/...whip           | Flexible whip<br>(0 dB acc. to TIA-329.2-C)                  |                  |                     | ◆                   |                            |
| MP-SS/450-4/...whip        | Stainless steel collinear whip<br>(4 dB acc. to TIA-329.2-C) |                  |                     |                     | ◆                          |
| MP-G-S/150/450/.../...whip | Flexible whip with shock spring (factory adjusted)           |                  | ◆                   | ◆                   |                            |
| MP-G-S/450/FM/... whip     | Flexible whip with shock spring (factory adjusted)           | ◆                |                     | ◆                   |                            |

For more information we refer to the corresponding whip datasheets. The in-built antennas can be used without an external ground-plane, but with degraded electrical performance.

WHIP MODELS

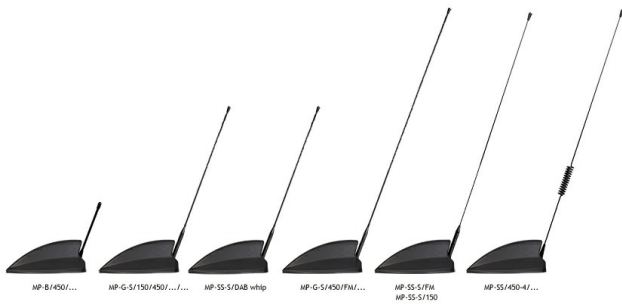

ACCESSORIES - CABLES









5 m ProFin Plus Cable Kit.  
7 pcs. RG 174 cables in one cable bundle (ø9 mm).  
Provides ease of installation.

GAIN TABLE FOR IN-BUILT ANTENNAS

| TYPE  | FREQUENCY (MHz) | PEAK GAIN (dBi) | AVERAGE GAIN H-PLANE (dBi) | AVERAGE GAIN H-PLANE (dBq) * |
|-------|-----------------|-----------------|----------------------------|------------------------------|
| 4G/5G | 650             | 4.0             |                            |                              |
|       | 900             | 5.0             | -1.0                       | -1.0                         |
|       | 1800            | 6.0             | -2.0                       | -1.0                         |
|       | 2500            | 7.0             | -2.0                       | -1.0                         |
|       | 3600            | 7.0             | -1.0                       | 0.0                          |
| WIFI  | 2400            | 6.0             | -3.0                       | -2.0                         |
|       | 5500            | 7.0             | -2.0                       | -3.0                         |

\* According to TIA-329.2-C

TYPICAL VSWR CURVES

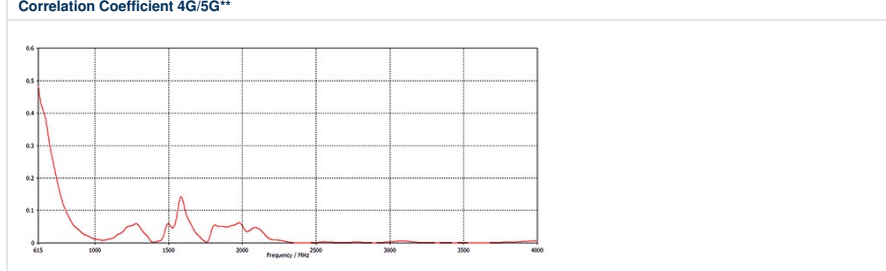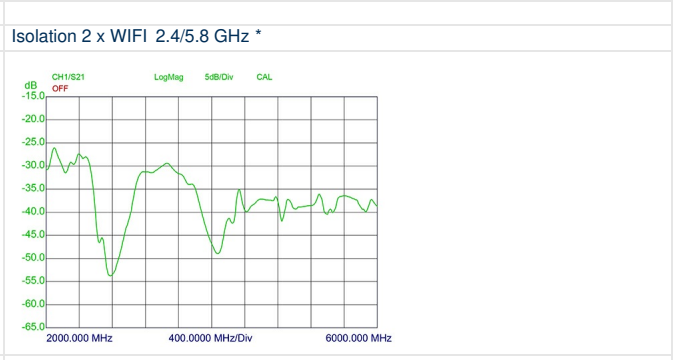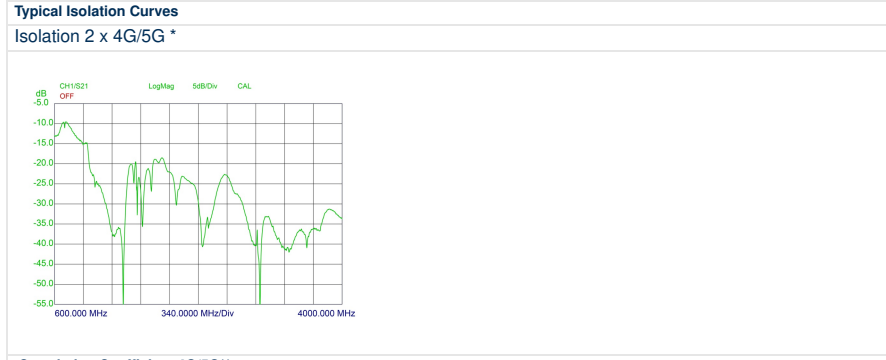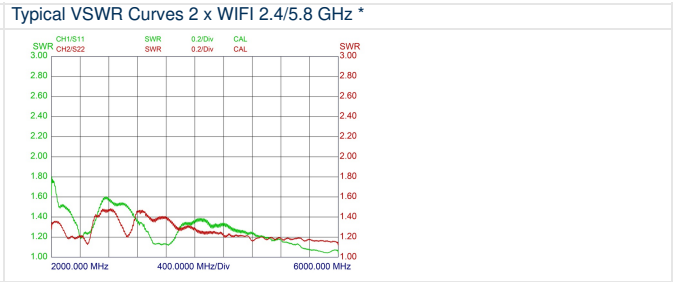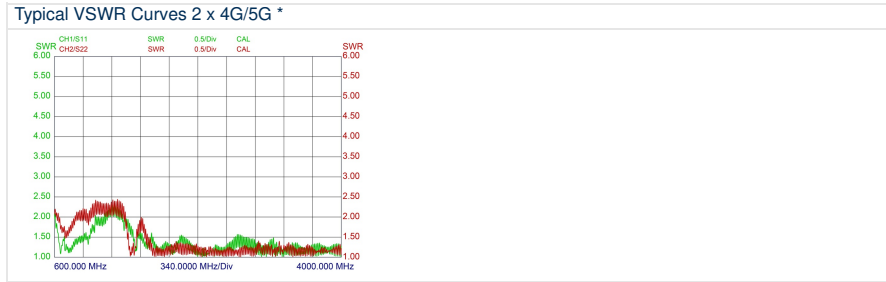

\* Measured with no whip and 5 m (197 in.) of RG 58 cable on a 500 x 500 mm (19.6 in. x 19.6 in.) ground plane.  
 \*\* Simulated in free space with no whip, no ground plane and no additional cable.

EU AND UK DECLARATION OF CONFORMITY

Hereby Amphenol Procom declare that the product type ProFin Plus is in compliance with EU Directive 2014/53/EU and the UK Radio Equipment Regulations 2017 (S.I. 2017 No. 1206).  
 The full text of the Declaration of Conformity is available at:

<https://amphenolprocom.com/images/shop/catalog/pdf-for-catalogues/Declaration-of-Conformity-ProFin Plus.pdf>

RADIATION PATTERNS

|                                  |                                 |                                  |                                 |
|----------------------------------|---------------------------------|----------------------------------|---------------------------------|
| <p>WIFI 2400 MHz, side view</p>  | <p>WIFI 2400 MHz, top view</p>  | <p>WIFI 5500 MHz, side view</p>  | <p>WIFI 5500 MHz, top view</p>  |
| <p>4G/5G 650 MHz, side view</p>  | <p>4G/5G 650 MHz, top view</p>  | <p>4G/5G 700 MHz, side view</p>  | <p>4G/5G 700 MHz, top view</p>  |
| <p>4G/5G 800 MHz, side view</p>  | <p>4G/5G 800 MHz, top view</p>  | <p>4G/5G 900 MHz, side view</p>  | <p>4G/5G 900 MHz, top view</p>  |
| <p>4G/5G 1800 MHz, side view</p> | <p>4G/5G 1800 MHz, top view</p> | <p>4G/5G 2100 MHz, side view</p> | <p>4G/5G 2100 MHz, top view</p> |
| <p>4G/5G 2600 MHz, side view</p> | <p>4G/5G 2600 MHz, top view</p> | <p>4G/5G 3600 MHz, side view</p> | <p>4G/5G 3600 MHz, top view</p> |