Slide Potentiometer

Model PSxx

Electronics

Features:

- 100,000 cycle life
- Metal/plastic lever
- RoHS Compliant



Model Styles Available

Single Gang	PSxx-1
Dual Gang	PSxx-2

Electrical¹

Resistance Range, Ohms	1K — 1M					
Standard Resistance Tolerance	± 20%					
Resistance Tapers	А, В, С					
Residual Resistance	Terminals 1 to 2: less than 10 ohms Terminals 2 to 3: less than 30 ohms					
Input Voltage, Maximum	Linear B taper: 200 Vac Other tapers: 150 Vac					
Power Rating, Watts (Single Unit / Dual Unit)	Linear B taper: 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W 45mm: 0.25W / 0.125W, 60mm: 0.2W / 0.2W Other tapers: 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm: 0.1W / 0.1W					
Dielectric Strength	300 Vac, 1 minute					
Insulation Resistance, Minimum	100M ohms at 250Vdc / 1 minute					
Sliding Noise	Less than 100mV					
Gang Error	±3dB (-40dB to 0dB)					

Notes:

Issue B 11/2020 Page 1

¹ Specifications subject to change without notice

Slide Potentiometer

Model PSxx




Mechanical

Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10gf to 100gf
Detent Slip-out force	30gf to 200gf

Durability

Sliding Life	100,000 cycles
--------------	----------------

Ordering Information²

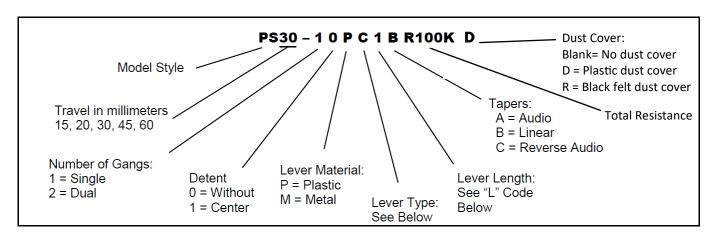

Standard Resistance Values, Ohms

1K	2K	5K	10K	20K	50K	100K	200K	500K	1 MEG	
----	----	----	-----	-----	-----	------	------	------	-------	--

Notes:


Issue B 11/2020 Page 2

² Contact our customer service for custom designs and features


Model PSxx



Plastic Lever Types

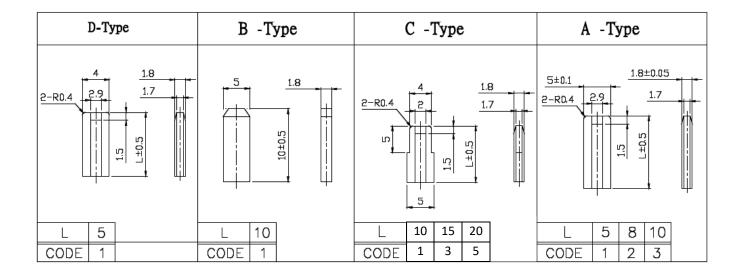

Metal Lever Types

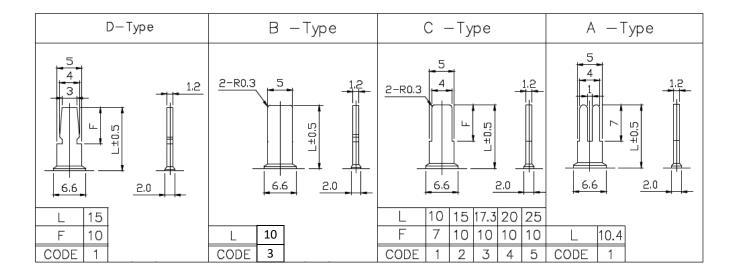

Issue B 11/2020 Page 3


Slide Potentiometer

Model PSxx



Outline drawing

PSxx-1 Single Gang

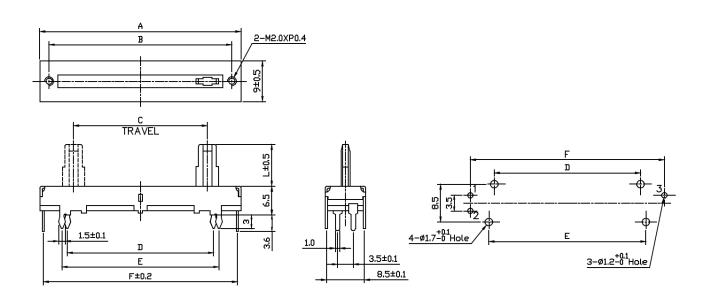

PSxx-2 Dual Gang

