

TRUSTED BATTERY SOLUTION

# **KEEPING YOU IN CHARGE**









# PSC-6500A-C 6V 0.5A

Sealed Lead Acid Battery Charger A-C Battery Charger Series


# **FEATURES**

- Universal input voltage range 10VAC 240VAC
- Automatic, current sensing dual-rate charging for efficient, care-free and safe operation
- LED indicators
- Alligator clip connectors with insulated sleeves

# **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- ISO9001:2015 Quality management systems
- ETL
- DOE
- FCC
- CE

## **CHARGER CHARACTERISTICS**

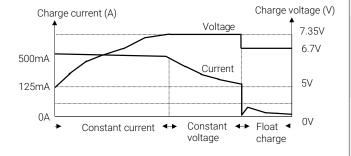

#### **GLOBAL HEADQUARTERS**

(USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation 365 Cabela Dr Suite 300, Reno, Nevada 89523

T: +1 619 661 2020

E: customer-service@power-sonic.com

#### **POWER-SONIC EMEA**

(EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk,

The Netherlands

T NL: + 31 33 7410 700 T UK: + 44 1268 560 686 T FR: + 33 344 32 18 17

E: salesEMEA@power-sonic.com

#### PERFORMANCE SPECIFICATIONS

#### Input Specs

AC input voltage rating 100Vac-240Vac AC input frequency 47Hz-63Hz

AC input current 0.1@115Vac/0.07a@230Vac

AC input power 6.8W
AC static state current 20mA

#### **Output Specs**

Output voltage range 5.0-7.5Vdc Output current 0.5A@6Vdc 3.8W Output power Bulk charge current rating 0.5A Bulk charge voltage rating 7.35Vdc Float charge voltage rating 6.7Vdc Light switching current 125mA Charging capacity range 2Ah to 5Ah

#### **General Specs**

0.6 Efficiency <0.75A Over load protection Short circuit protection Yes Reversed polarity connectors protection Yes Operating temperature 0°C-40°C Storage temperature -30°C-85°C Net weight 100a Dimensions 80\*50\*57mm Enclosure Plastic Case Application Charger type Wall mounting Plug type Type A (NEMA 1 - 15)

#### Safety Specs

 Withstand voltage (Hi-Pot)
 3000Vac ≤ 10mA (60s)

 Insulation resistance
 >100MΩ @500Vdc

 Safety standard
 UL1310 (E248494)

 Compliance
 FCC

#### **LED Indicator Status**

Green LED on No load or float charge
Red LED on Fast charge

## **FURTHER INFORMATION**

Please refer to our website **www.power-sonic.com** for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.