

# PTSA0805

## Automotive SMD PTC fuses

**Applications**

- Infotainment
- In-vehicle navigation
- Telematics
- Car lighting
- Power window and seat control
- Instrument clusters
- PCB trace protection

**Product features**

- AEC-Q200 qualified
- Positive temperature coefficient (PTC)
- Surface mount resettable fuse
- Compact 0805 (2012 metric) footprint
- Low resistance
- Fast time-to-trip
- Current rating from 0.10 to 0.12 A
- Voltage rating 15 V

**Environmental compliance****Part number system/ordering:****PTSA080515V010**

- PT= PTC resettable fuse
- S= Surface mount
- A= Automotive
- 0805= Dimension code
- 15V= Maximum voltage
- 010= Ihold current rating (010= 0.10 A)


## Product specifications

Part number	Vmax <sup>1</sup>	I <sub>max</sub> <sup>2</sup>	I <sub>hold</sub> <sup>3</sup>	I <sub>trip</sub> <sup>4</sup>	Pd <sup>5</sup>	Time-to-trip (maximum)		Resistance <sup>6</sup>		Post trip (R <sub>t</sub> ) maximum (Ω)	Part marking
	(V <sub>dc</sub> )	(A)	(A)	(A)	typical (W)	(A)	(seconds)	Initial (R <sub>i</sub> ) minimum (Ω)			
PTSA080515V010	15	10	0.10	0.30	0.50	0.50	2.00	0.50	10.0	0	
PTSA080515V012	15	20	0.12	0.30	0.50	1.00	0.50	0.40	9.0	0	


1. Vmax: Maximum continuous voltage the device can withstand without damage at rated current
2. I<sub>max</sub>: Maximum fault current the device can withstand without damage at rated voltage
3. I<sub>hold</sub>: Maximum current the device will pass without interruption at +23 °C still air
4. I<sub>trip</sub>: Minimum current that will transition the device from low resistance to high resistance at +23 °C still air
5. Pd: Power dissipated from the device when in tripped state at +23 °C still air

6. R<sub>i</sub>: Minimum resistance of the device at +23 °C
- R<sub>t</sub>: Maximum resistance of the device one hour after tripping at +23 °C

## Dimensions-mm

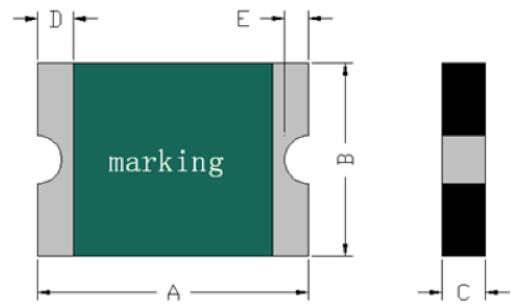

## Recommended pad layout

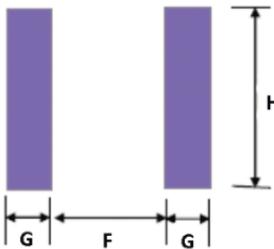

Part number	A typ	A max	B typ	B max	C typ	C max	D min	E min	F	G	H
PTSA080515V010	2.25	2.50	1.50	1.60	0.50	1.00	0.20	0.08	1.2	1.0	1.50
PTSA080515V012	2.25	2.50	1.50	1.60	0.50	1.00	0.20	0.08	1.2	1.0	1.50

## Thermal derating chart - I<sub>hold</sub> (A)

Part number	Maximum ambient temperature (°C)								
	-40	-20	0	25	40	50	60	70	85
PTSA080515V010	0.14	0.13	0.12	0.10	0.09	0.08	0.07	0.06	0.04
PTSA080515V012	0.18	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.05

### General specifications

Operating temperature: -40 °C to + 85 °C (with derating)

Storage temperature: -10 °C to + 40 °C

Storage relative humidity: ≤70%

Storage condition: Keep away from corrosive atmosphere and sunlight

Passive aging: IEC60738-1, +65 °C, 1000 hours, ≤ 20%

IEC60738-1, +85 °C, 1000 hours, ≤ 20%

Humidity aging: +85 °C, 85% RH, 100 hours, ≤ 20%

Thermal shock: IEC60738-1, +85 °C/ -40 °C, 20 cycles, ≤ 50%


Trip cycle life: UL1434, Vmax, Imax, 100 cycles, no arcing or burning

Trip endurance: UL1434, Vmax, Itrip ≤ I ≤ Imax, 2 hours, no arcing or burning

MSL test: J-STD-020, MSL=1, pass and no visible damage

### Packaging information

Supplied in tape and reel packaging, 4000 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

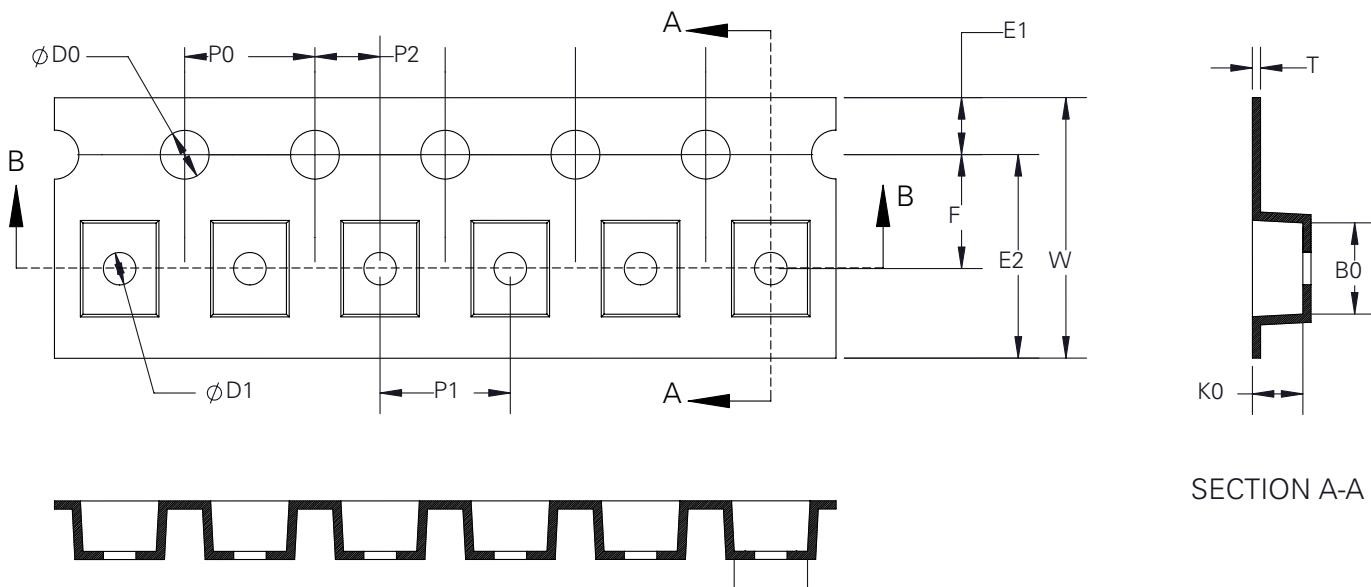

W	F	E1	E2	P0	P1	P2	D0	D1	A0	B0	K0	T
8.00 ± 0.30	3.50 ± 0.10	1.75 ± 0.10	-	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	1.50 + 0.10/-0	-	1.68 ± 0.10	2.44 ± 0.10	1.04 ± 0.10	0.22 ± 0.05