

PTSLR1206

Low resistance SMD PTC fuses



Applications

- Data ports
- Micromotors and fans
- Low voltage test and measurement
- Low voltage hand held equipment
- PC-based medical equipment
- USB protection
- Secondary Li-ion battery protection
- Game consoles, set top boxes
- Battery charging & charging connections

Product features

- Positive temperature coefficient (PTC)
- Surface mount resettable fuse
- Low resistance
- Compact 1206 (3216 metric) footprint
- Voltage rating 6 V
- Current rating from 0.75 A to 7.0 A
- Fast time-to-trip

Agency information

- cURus Recognized file no. E343021
- TUV: File R 50455924, R 50506608



Environmental compliance



Part number system/ordering:

PTSLR1206V075

- PT= PTC resettable fuse
- S= Surface mount
- LR = Low resistance
- 1206= Dimension code
- 6V= Maximum voltage
- 550= Ihold current rating (550= 5.5 A)

Product specifications

Part number	Vmax ¹	I _{max} ²	I _{hold} ³	I _{trip} ⁴	Pd ⁵	Time-to-trip (maximum)		Resistance ⁶		Safety approvals		
	(V _{dc})	(A)	(A)	(A)	typical (W)	(A)	(seconds)	Initial (R _i) minimum (Ω)	Post trip (R _t) maximum (Ω)	Part marking	cURus	TÜV
PTSLR12066V075	6	50	0.75	1.5	0.8	8	0.3	0.017	0.18	L _a	✓	✓
PTSLR12066V110	6	50	1.1	2.2	0.8	8	0.3	0.015	0.13	L _b	✓	✓
PTSLR12066V150	6	50	1.5	3.0	0.8	8	0.3	0.010	0.08	L _c	✓	✓
PTSLR12066V175	6	50	1.75	3.5	0.8	8	0.4	0.005	0.045	L ₃	✓	✓
PTSLR12066V200	6	50	2.0	4.0	0.8	8	0.5	0.005	0.04	L ₇	✓	✓
PTSLR12066V260	6	50	2.6	5.0	0.8	8	4	0.003	0.03	L ₈	✓	✓
PTSLR12066V300	6	50	3.0	6.0	0.8	8	4	0.003	0.026	L ₉	✓	✓
PTSLR12066V350	6	50	3.5	7.0	0.8	8	5	0.003	0.018	L ₁	✓	✓
PTSLR12066V380	6	50	3.8	8.0	0.8	8	5	0.002	0.014	L ₂	✓	✓
PTSLR12066V400	6	50	4.0	8.0	0.8	20	2	0.001	0.014	L ₅	✓	✓
PTSLR12066V450	6	50	4.5	9.0	0.8	22	2	0.001	0.014	L ₆	✓	✓
PTSLR12066V500	6	50	5.0	10.0	0.8	25	2	0.001	0.013	L _e	✓	✓
PTSLR12066V550	6	50	5.5	11.0	1.5	27.5	5	0.001	0.01	L ₅	✓	✓
PTSLR12066V600	6	50	6.0	12.0	1.5	30	5	0.001	0.01	L ₇	✓	✓
PTSLR12066V650	6	50	6.5	13.0	1.5	32.5	5	0.001	0.009	L ₆₅	✓	✓
PTSLR12066V700	6	50	7.0	14.0	1.5	35	5	0.001	0.008	L ₇₀	✓	✓


1. Vmax: Maximum continuous voltage the device can withstand without damage at rated current
2. I_{max}: Maximum fault current the device can withstand without damage at rated voltage
3. I_{hold}: Maximum current the device will pass without interruption at +23 °C still air unless otherwise specified
4. I_{trip}: Minimum current that will transition the device from low resistance to high resistance at +23 °C still air, unless otherwise specified

5. Pd: Power dissipated from the device when in tripped state at +23 °C still air, unless otherwise specified


6. R_i: Minimum resistance of the device prior to tripping at +23 °C
R_t: Maximum resistance of the device one hour after tripping at +23 °C

Part number	A min	A max	B min	B max	C min	C max	D min	D max	E min	E max	F	G	H
PTSLR12066V075	3.0	3.5	1.5	1.8	0.4	0.7	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V110	3.0	3.5	1.5	1.8	0.4	0.7	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V150	3.0	3.5	1.5	1.8	0.4	0.7	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V175	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V200	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V260	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V300	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V350	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V380	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V400	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V450	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V500	3.0	3.5	1.5	1.8	0.6	1.2	0.125	0.75	0.08	0.45	2.0	1.0	1.9
PTSLR12066V550		3.5		1.8		1	0.25		0.1		1.8	1.0	1.8
PTSLR12066V600		3.5		1.8		1	0.25		0.1		1.8	1.0	1.8
PTSLR12066V650		3.5		1.8		1.3	0.25		0.1		1.8	1.0	1.8
PTSLR12066V700		3.5		1.8		1.3	0.25		0.1		1.8	1.0	1.8


Dimensions-mm

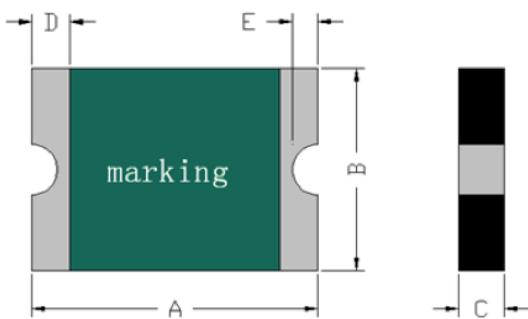


Recommended pad layout

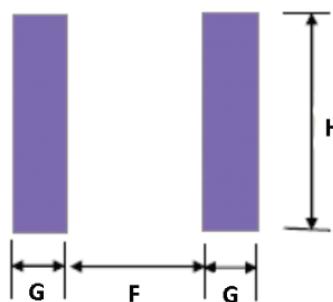

Thermal derating curve
PTSLR12066V075-V500

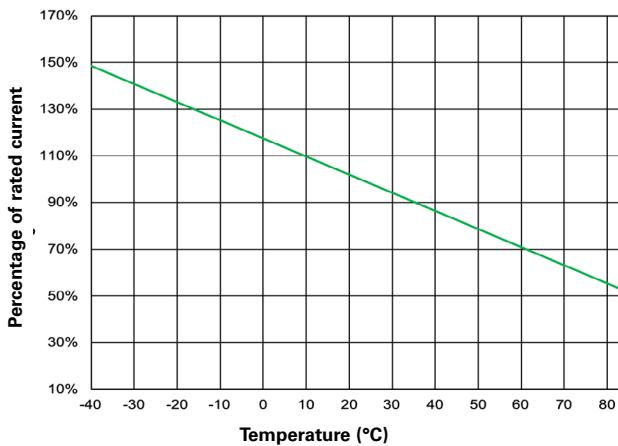

Thermal derating curve
PTSLR12066V550-V700

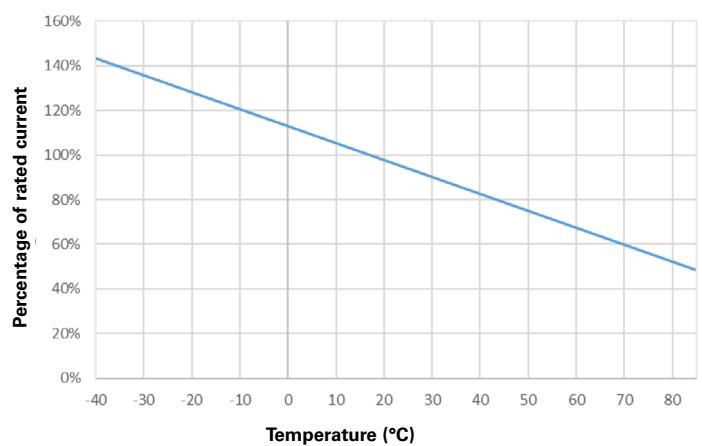

General specifications (PTSLR12066V075-V500)

Operating temperature: -40 °C to + 85 °C (with derating)

Storage temperature: -10 °C to + 40 °C

Storage relative humidity: ≤75%

Storage condition: Keep away from corrosive atmosphere and sunlight

Passive aging: IEC60738-1, +85 ± 5 °C, 1000 ± 24 hours

Humidity aging: +85 °C, 80 to 85% relative humidity, 100 ± 5 hours

Rapid change of temperature: IEC60738-1, +85 ± 5/-40 ± 5 °C, 20 cycles, 30 minutes

Overload endurance: UL1434, Vmax, 120% I_{max}, 50 cycles
Vmax, 300% I_{trip}, 6000 cycles

Trip endurance: UL1434, Vmax, I_{trip} < I ≤ I_{max}, 1000 ± 24 hours

Solderability: IEC60068-2-58, +245 ± 5 °C, 3 ± 0.3 seconds

Moisture sensitivity test: J-STD-020, MSL=2a

General specifications (PTSLR12066V550-V700)

Operating temperature: -40 °C to + 85 °C (with derating)

Storage temperature: -10 °C to + 40 °C

Storage relative humidity: ≤70%

Storage condition: Keep away from corrosive atmosphere and sunlight

Passive aging: IEC60738-1, +60 °C/90% RH, 168 hours, ≤3*R1max

Humidity aging: +85 °C, 85% RH, 96 hours, ≤3*R1max

Thermal shock: IEC60738-1, +85 °C/ -40 °C, 20 cycles, ≤3*R1max

Trip cycle life: UL1434, Vmax, I_{max}, 100 cycles, no arcing or burning

Trip endurance: UL1434, Vmax, I_{trip} ≤ I ≤ I_{max}, 2 hours, no arcing or burning


Solvent resistance: Freon, Trichloroethane, Hydrocarbons: no change

MSL test: J-STD-020, MSL=2, pass and no visible damage

Packaging information
PTSLR12066V075-500

PTSLR12066V075, PTSLR12066V110, PTSLR12066V150,
Supplied in tape and reel packaging, 5000 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

PTSLR12066V175, PTSLR12066V200, PTSLR12066V260, PTSLR12066V300, PTSLR12066V350, PTSLR12066V380,
PTSLR12066V400, PTSLR12066V450, PTSLR12066V500
Supplied in tape and reel packaging, 2500 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

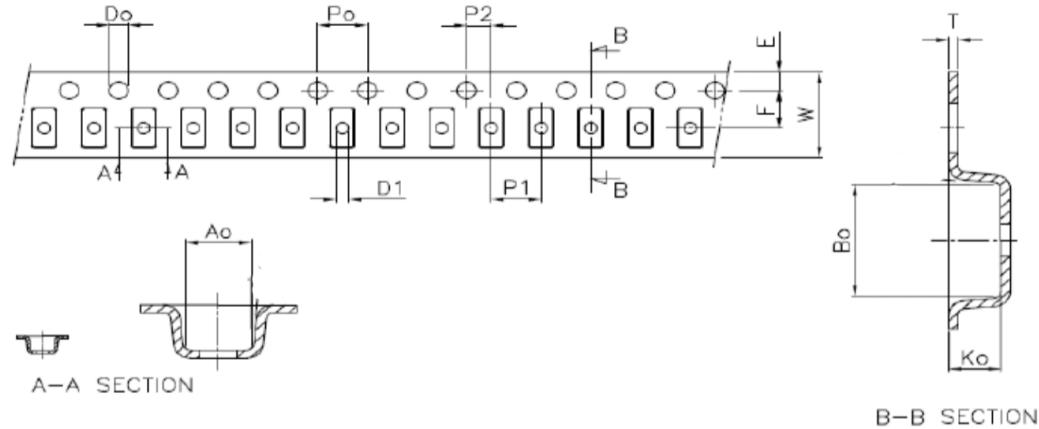

PTSLR12066V075, PTSLR12066V110, PTSLR12066V150

A_o ± 0.10	B_o ± 0.10	K_o ± 0.05	P_o ± 0.10	P_1 ± 0.10	P_2 ± 0.10	T ± 0.05	E ± 0.10	F ± 0.10	D_o ± 0.05	D_1 , min	W ± 0.30	$10P_o$ ± 0.20
1.85	3.45	0.85	4.0	4.0	2.0	0.23	1.75	3.50	1.55	1.0	8.0	40


PTSLR12066V175, PTSLR12066V200, PTSLR12066V260, PTSLR12066V300, PTSLR12066V350, PTSLR12066V380, PTSLR12066V400,
PTSLR12066V450, PTSLR12066V500

A_o ± 0.10	B_o ± 0.10	K_o ± 0.05	P_o ± 0.10	P_1 ± 0.10	P_2 ± 0.10	T ± 0.05	E ± 0.10	F ± 0.10	D_o ± 0.05	D_1 , min	W ± 0.30	$10P_o$ ± 0.20
1.95	3.55	1.40	4.0	4.0	2.0	0.23	1.75	3.50	1.55	1.0	8.0	40

Packaging information
PTSLR12066V550-700


PTSLR12066V550, PTSLR12066V600,
Supplied in tape and reel packaging, 4000 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

PTSLR12066V650, PTSLR12066V700,
Supplied in tape and reel packaging, 3500 parts per 7.0" (178 mm) diameter reel (EIA-481 compliant)

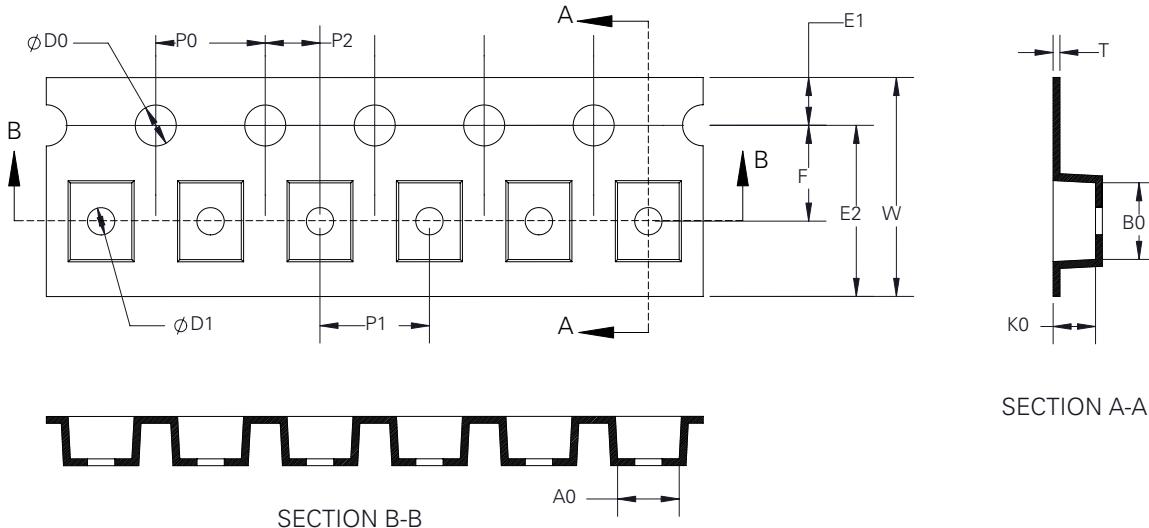

W	F	E1	E2	P0	P1	P2	D0	D1	A0	B0	K0	T
8.00 ± 0.30	3.50 ± 0.10	1.75 ± 0.10	-	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	$1.55 + 0.10/-0$	-	1.77 ± 0.10	3.40 ± 0.10	1.04 ± 0.10	0.22 ± 0.05

Wave solder profile

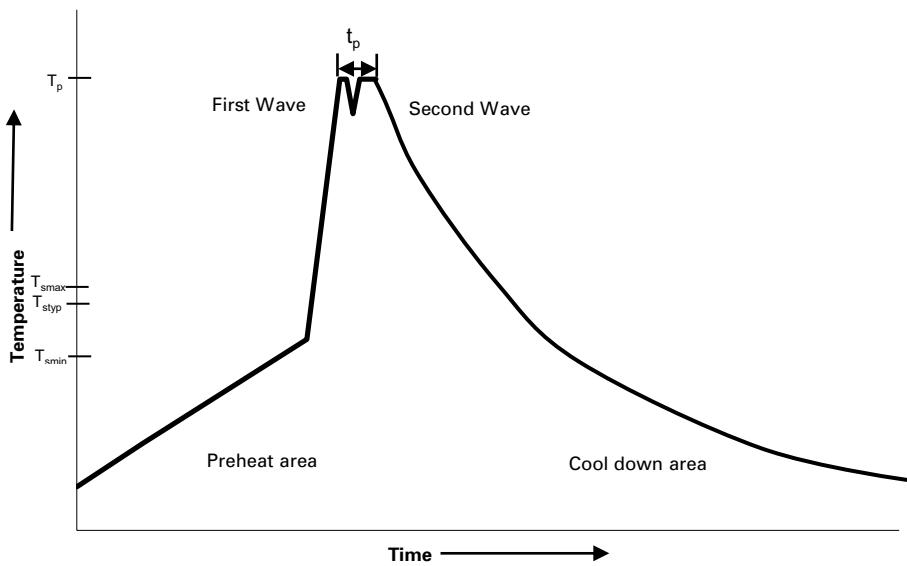

Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat	<ul style="list-style-type: none"> Temperature min. (T_{smin}) Temperature typ. (T_{styp}) Temperature max. (T_{smax}) Time (T_{smin} to T_{smax}) (t_s) 	100 °C 120 °C 130 °C 70 seconds
Δ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature (T_p)*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25°C to 25°C	4 minutes	4 minutes

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended