

SUMMARY

Wires

Low voltage	2
High voltage	2
Fiber optic	2

Series	3K
Termination type	Hybrid contacts
IP rating	68 when mated
AWG wire size	24.00 - 20.00
Cable Ø	8.90 - 9.50 mm
Status	active
Matching parts	FUW.3K.93C.YSEC96



Image is for illustrative purpose only

Download

- [Request a quote](#)
- [Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PU*: Free receptacle, "Y" design, cable collet adapter and long shell for fitting a bend relief with cap (with enhanced screen efficiency)
Keying	5 keys (alpha=95, beta=115, gamma=20, delta=30, plug: female LV, male HV, female FO contacts)
Housing Material	Special housing (see notes for details)
Weight	87.82 g

Performance

Configuration	3K.93C : 2 FO Type F2, 2 HV + 2 LV
Insulator	
Rated Current	10 Amps

Specifications


- Fiber Optic Contact: Type F2
- Vtest power/signal (AC): 2250V , 1000V
- Working voltage power/signal(AC): 600V , 42V
- Cable type: SMPTE 311M or EBU R100

Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 20000 mating cycles
 Temp (min / max): -40°C / +80°C
 Humidity (max): <=95% [at 60 deg C /140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Climatical Category: 50/175/21
 Shielding (min): 95 dB (10 MHz)
 Shielding (min): 80 dB (1 GHz)

DRAWINGS

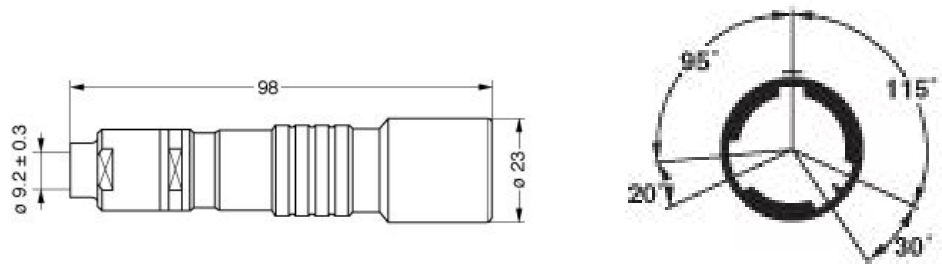

Dimensions

	A	L
mm.	23	98
in.	0,91	3,86

RECOMMENDED BY LEMO

Tools

Crimp settings: AWG/Selector = 20-22-24 14-16-18/6-5-5 7-6-5
 Positionner: [DCE.91.093.BVC](#)
 Positionner 2: [DCE.91.133.BVCM](#)
 Extractor: [DCC.09.05B.LAG](#)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.