

# Open-Q™ 624A SOM (System on Module)

Based on the Qualcomm® Snapdragon™ 624 processor

Intrinsyc's Open-Q™ 624A SOM is a feature-rich, production ready module based on the Snapdragon™ 624 processor from Qualcomm® Technologies, Inc. The SOM's small form factor, high-end Wi-Fi/BT and extensive peripheral I/O make it ideal for devices that require cloud connectivity and edge compute capabilities. Its multimedia, HD video camera, and touch display capabilities, along with extensive audio features, make it a perfect solution for creating next-gen home hub products requiring tasks such as video conferencing, remote video monitoring, movie and video streaming.

## Key Features

- Octa-Core 64-bit ARM Cortex A53 1.8GHz
- Pre-certified high performance Wi-Fi/BT module
- Qualcomm Hi-Fi audio codec for multi-mic solutions
- Hi-Def video playback and LCD support
- Android™ 8 Oreo™

## Applications

- Audio/video home hubs
- Smart home control center
- Video conferencing products
- Streaming video/audio devices
- Smart connected cameras



## Hardware Specifications

<b>Processor</b>	Qualcomm® Snapdragon™ 624 (APQ8053) built on 14nm technology Octa-Core 64-bit ARM Cortex A53 1.8GHz Qualcomm® Adreno™ 506 GPU OpenGL ES 3.1, OpenCL 2.0 Full, DirectX 12, GPU Tessellation, Geometry Shading Qualcomm® Hexagon™ 546 DSP
<b>Memory/Storage</b>	2GB LPDDR3 RAM, 32GB eMMC Flash (16GB & 4GB flash memory sizes available by special order)
<b>Wireless</b>	Pre-certified Wi-Fi/BT module - 802.11a/b/g/n/ac, 2x2 MU-MIMO, 2.4/5Ghz, Bluetooth 4.2 + BLE (QCA9379-3) 3x MHF4 antenna connectors - 2 for Wi-Fi, 1 separate for BT
<b>Location Services</b>	GPS, GLONASS, Compass (WGR7640) w/ U.FL antenna connector
<b>LCD/Touchscreen Interface</b>	1x 4-lane MIPI DSI display interface Supports LCD up to 1080P Full HD 60fps
<b>Camera Interface</b>	Up to 21MP with 2x 4-lane MIPI CSI camera interfaces and dual ISPs
<b>Video</b>	Video Capture up to 1080p at 90fps, Video Playback up to 1080p at 90fps, H.264 (AVC) and H.265 (HEVC)
<b>Audio Interfaces</b>	I2S interface for external audio devices 2x digital mic inputs directly to processor
<b>Audio Codec</b>	Qualcomm® Hi-Fi audio codec on SOM (WCD9335) with 1x headset interface 4x analog microphone inputs 1x stereo line outputs 4x digital mic inputs
<b>Power/Battery Management</b>	Qualcomm power management and battery charging solution (PM8953/PM18952)
<b>I/O</b>	1x USB3.0 Type-C, multiple BLS ports (GPIO, UART, SPI, I2C buses), debug UART
<b>Operating Environment</b>	Power input: 3.6V to 4.2V Operating Temperature: 0°C to +50°C
<b>Form Factor</b>	Carrier board connection: 3x 100 pin board-to-board connectors Size: 50mm x 46.5mm with four mounting holes for secure mounting and effective thermal solutions

## Software

<b>OS Support</b>	Android™ 8 Oreo™ *Note that all hardware features may not be supported by all SW — see latest SW release notes for details
-------------------	---

## Purchasing Information


**Open-Q 624A  
SOM**

Part number: QC-DB-M10032

[Store Link](#)

Alternate SOM configurations available by special order (minimum order quantities apply) - e.g. no GPS, different memory size, etc.  
Contact sales to discuss your specific needs today:

[sales@intrinsyc.com](mailto:sales@intrinsyc.com)

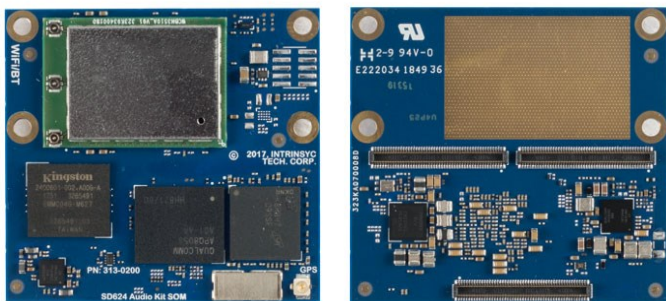

Specifications are subject to change without notice. Not all features listed may be supported in software. All brand or product names are trademarks or registered trademarks of their respective owners. Qualcomm Snapdragon, Qualcomm Kryo, Qualcomm Spectra, Qualcomm Adreno, Flunce and Qualcomm Hexagon are products of Qualcomm Technologies, Inc. Qualcomm IZat is a product of Qualcomm Atheros, Inc. Qualcomm, Snapdragon, Adreno, Flunce and Hexagon are trademarks of Qualcomm Incorporated, registered in the United States and other countries. Kryo, Spectra and IZat are trademarks of Qualcomm Incorporated. Used with permission. Cortex is a trademark of ARM Holding plc. Used with permission.