


Product Overview

The QPL1818 is a GaAs pHEMT single ended MMIC RF amplifier IC featuring 15dB of gain and low noise. This IC is designed to support DOCSIS 4.0 Amplifiers and Nodes as well as Fiber to The Home (FTTH), Satellite, Terrestrial TV, Home Gateways, and Cable Modems applications from 50 to 1800MHz. The QPL1818 is powered by a single 5 V supply and packaged in a 3 x 3 16-pin QFN.



Functional Block Diagram

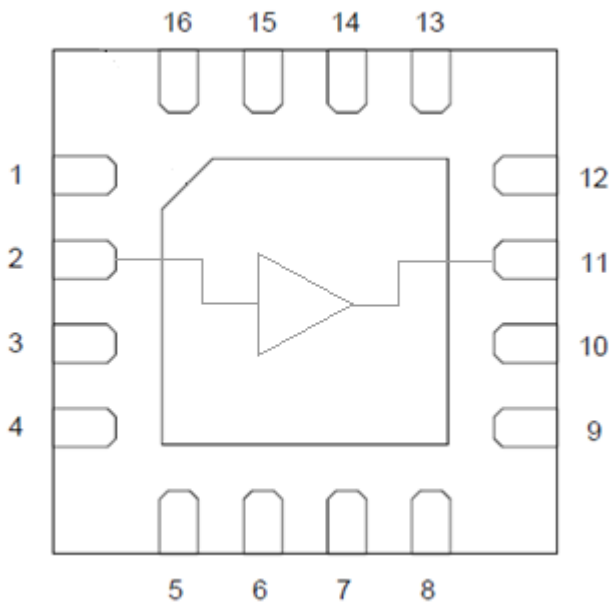

3 x 3 16-pin QFN Package

Key Features

- 50 MHz to 1800 MHz Operation
- 5 V Operation
- Gain: 15 dB Typical
- Noise Figure: 2 dB
- Adjustable Bias Using External Resistors
- RoHS Compliant

Applications

- DOCSIS 4.0 Amplifiers
- DOCSIS 4.0 Optical Nodes
- DOCSIS 4.0 Remote PHY Devices
- FTTH GPON and GEPON
- DOCSIS 4.0 Cable Modem and Home Gateways
- Single Ended Gain Block

Ordering Information

Part Number	Description
QPL1818EVB-01	Evaluation Board
QPL1818SB	Sample bag with 5 pieces
QPL1818SR	7" Reel with 100 pieces
QPL1818TR7	7" Reel with 2500 pieces

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage (V_{DD})	+10 V
Supply Current (I_{DD})	140 mA
Maximum Input Level	+10 dBm
Operating Temperature Range	-40 to +100 °C
Storage Temperature Range	-65 to +150 °C
Maximum Junction Temperature	+150 °C


Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Electrical Specifications at +5 V

Parameter	Condition ⁽¹⁾	Min	Typ	Max	Unit
Supply Voltage (V_{DD})			5		V
Supply Current (I_{DD})			100		mA
Frequency Range		50		1800	MHz
Gain			15		dB
Gain Slope			1		dB
Reverse Isolation			19		dB
Input Return Loss			20		dB
Output Return Loss			18		dB
MER	At +56dBmV Total Composite Output power. 108MHz to 1791MHz, 0dB tilt, 288Ch, QAM256		42		dB
Noise Figure			2		dB
OIP2L	+5 dBm / tone output		59		dBm
OIP2U	+5 dBm / tone output		45		dBm
OIP3	+5 dBm / tone output		37		dBm
OP1dB			19		dBm
Thermal Resistance	Θ_{JC}		60		°C/W

Note: Typical performance at these conditions: Temp = +25 °C, V_{DD} = +5 V, 75 Ω system, Full band unless otherwise noted



Evaluation Board Schematic 50 MHz – 1800 MHz

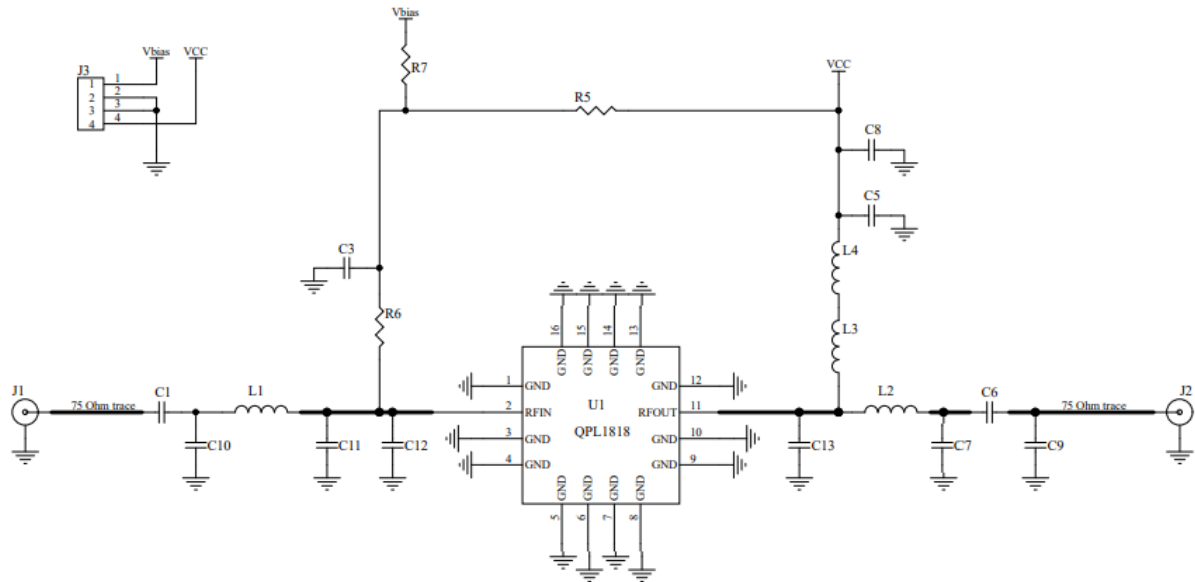

Evaluation Board Bill of Materials

Ref Des	Description	Manufacturer	Part Number
U1	1791MHz, Low Noise, High Linearity Amp	Qorvo	QPL1818
PCB	EVB PCB, QPL1818	Qorvo	SAP 296405
C1, C6	CAP, 270 pF, 5%, 0402	Murata	GCM1555C1H271JA16D
C8	CAP, 0.01uF, 10%, 0402	Murata	GCM155R71H103KA55D
L4	RES, 0 Ω, 0603	VISHAY AMERICAS INC	MCT06030Z0000ZP500
L1	IND, 2.6nH, +/-0.1nH, W/W, HI-Q, 0402	Murata	LQW15AN2N6B8ZD
L2	IND, 4.4nH, ±0.1nH, W/W, HI-Q, 0402	Murata	LQW15AN4N4G80
C9	CAP, 0.5pF, +/-0.25pF, 50V, HI-Q	Murata	GJM1555C1HR50CB01D
C11	RES, 27 K OHM,5%,1/16W,0402, LEAD FREE	KOA Speer	RK73B1ETTP273J
C12	RES, 1M, 5%, 1/16W, 0402	Kamaya, Inc	RMC1/16S-105JTH
L3	IND, 2200nH, +/-20%, 500mA, 400MHz, 0603	Taiyo Yuden	BRL1608T2R2M
J1, J2	CONN, F FEM, 75 OHMS	Millimeter Wave	MW-846-C-DD-75
J3	CONN, HDR, ST, 4-PIN, 0.100"	Samtec	TSW-103-07-G-S
R1, R5, R6, R7, C10	DNI		

Evaluation Board Assembly Drawing





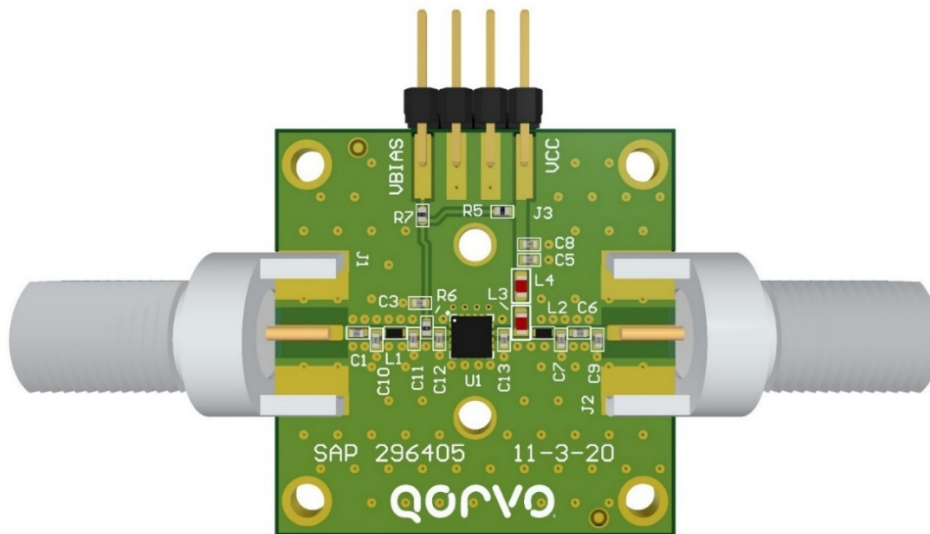
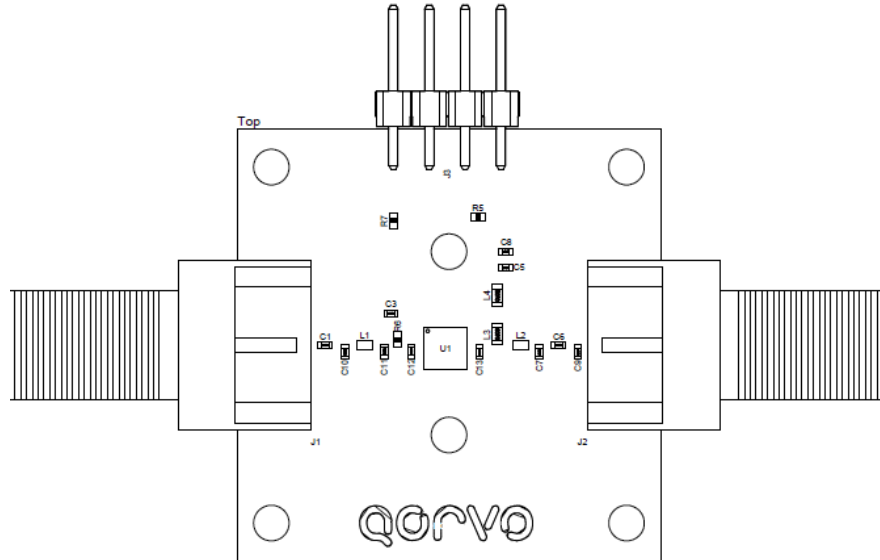


QPL1818 Evaluation Board

LAYER STACK LEGEND




Material	Layer	Thickness	Dielectric Material
	Top Overlay		
	Surface Material	0.0010in	SM-001
	CF-004	0.0007in	
	Core	0.0580in	FR-4
	CF-004	0.0007in	
Total thickness: 0.0604			

Performance Data at +5 V

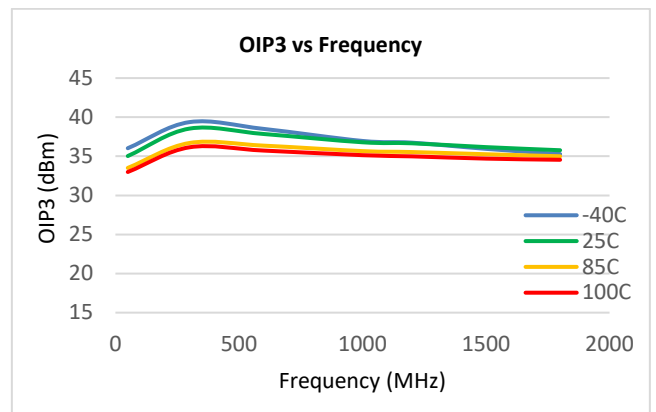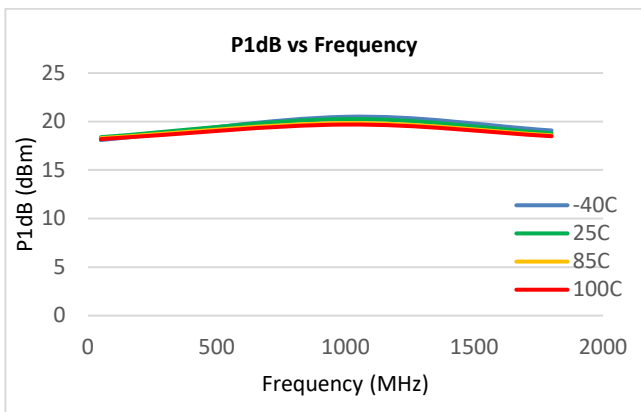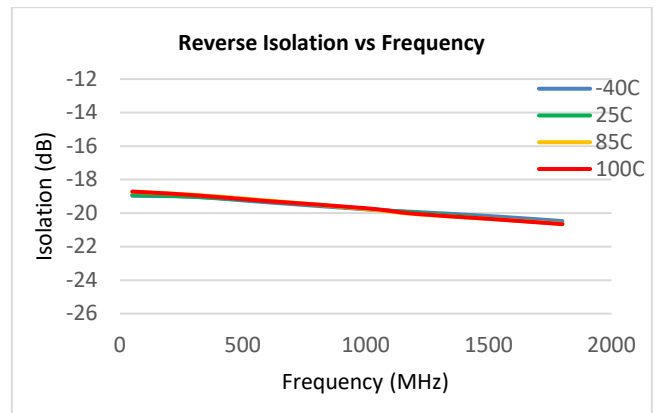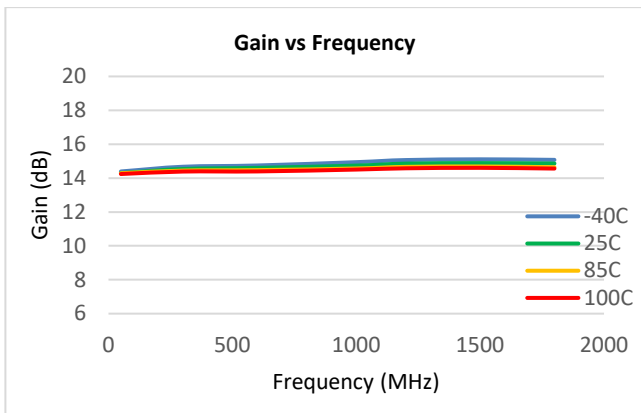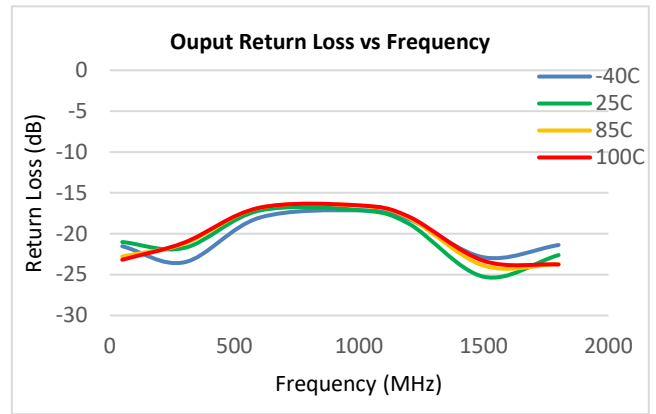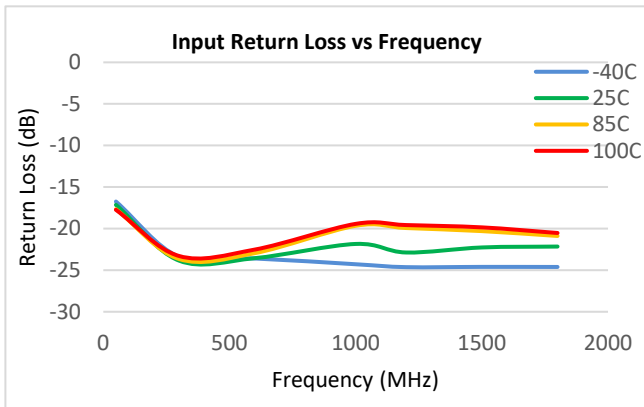

Notes: (1) OIP3: +5 dBm/tone output






Performance Data at +5 V

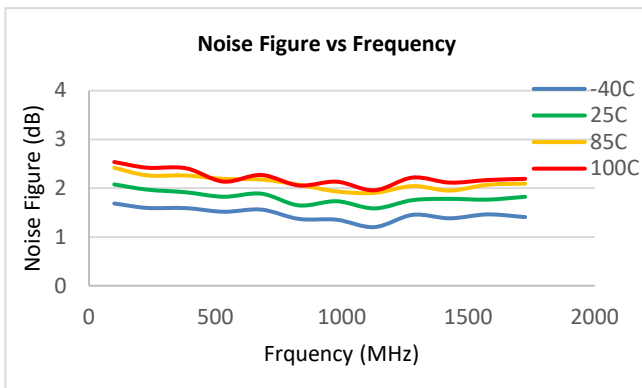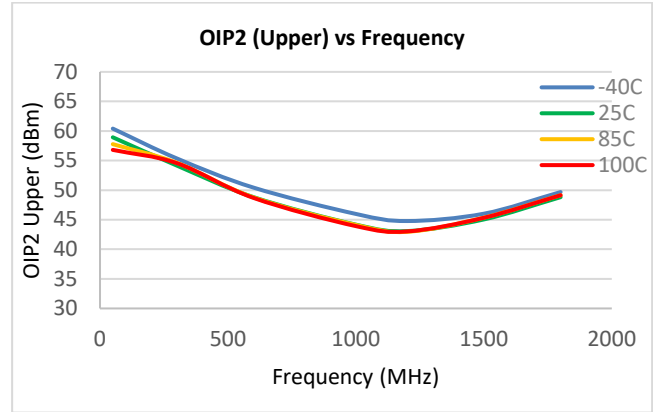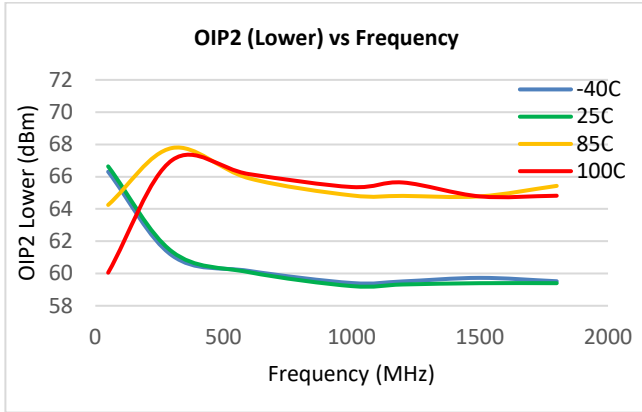

Notes:


- (1) OIP2: +5 dBm / tone output

Performance Data vs Supply Voltage

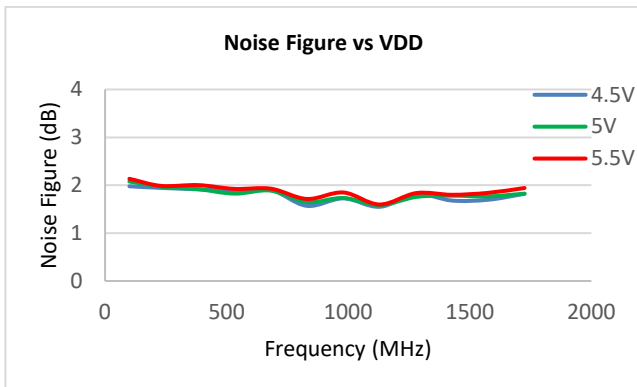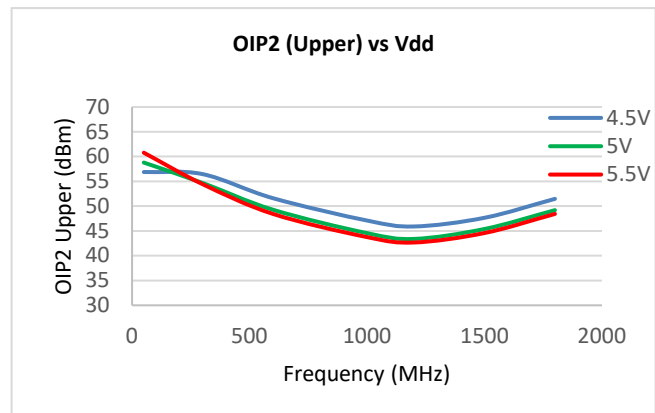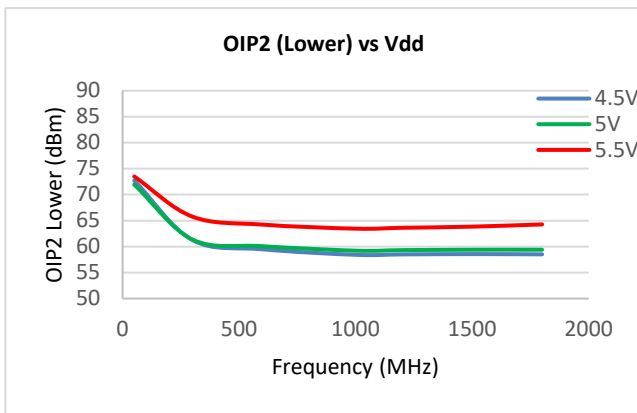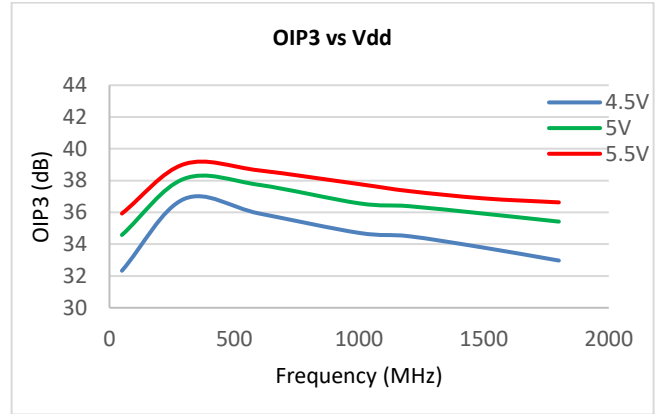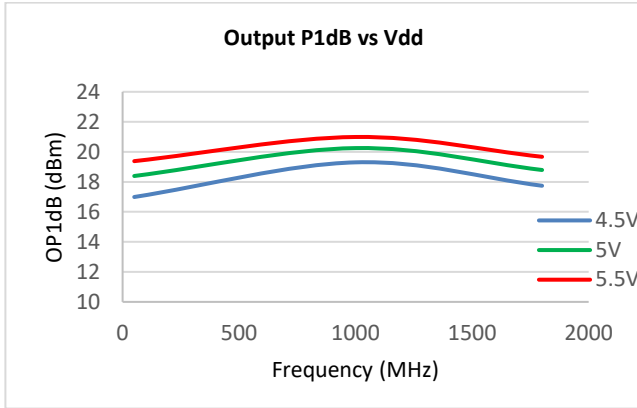


- Notes:
- (1) OIP3: 5 dBm / tone output
 - (2) OIP2: 5 dBm / tone output

Pin Configuration and Description

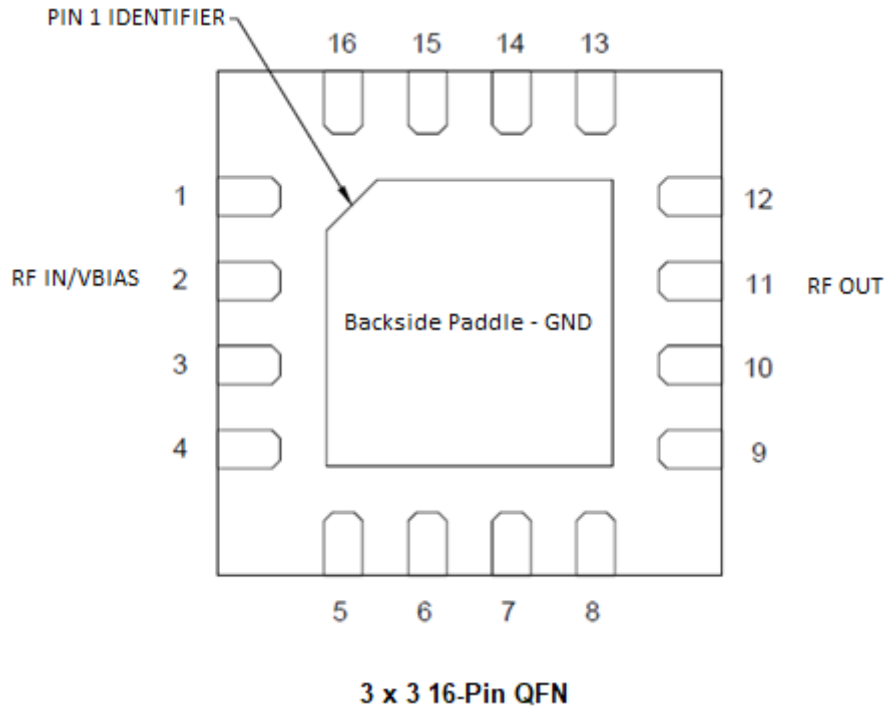

Pin Number	Label	Description
1	GND	
2	RF IN / VBIAS	RF Input, DC blocking capacitor required
3	GND	
4	GND	
5	GND	
6	GND	
7	GND	
8	GND	
9	GND	
10	GND	
11	RF OUT	RF Output
12	GND	
13	GND	
14	GND	
15	GND	
16	GND	
Backside Paddle	GND	RF/DC/Thermal/Ground. Minimize the inductance and thermal resistance.

Package Outline

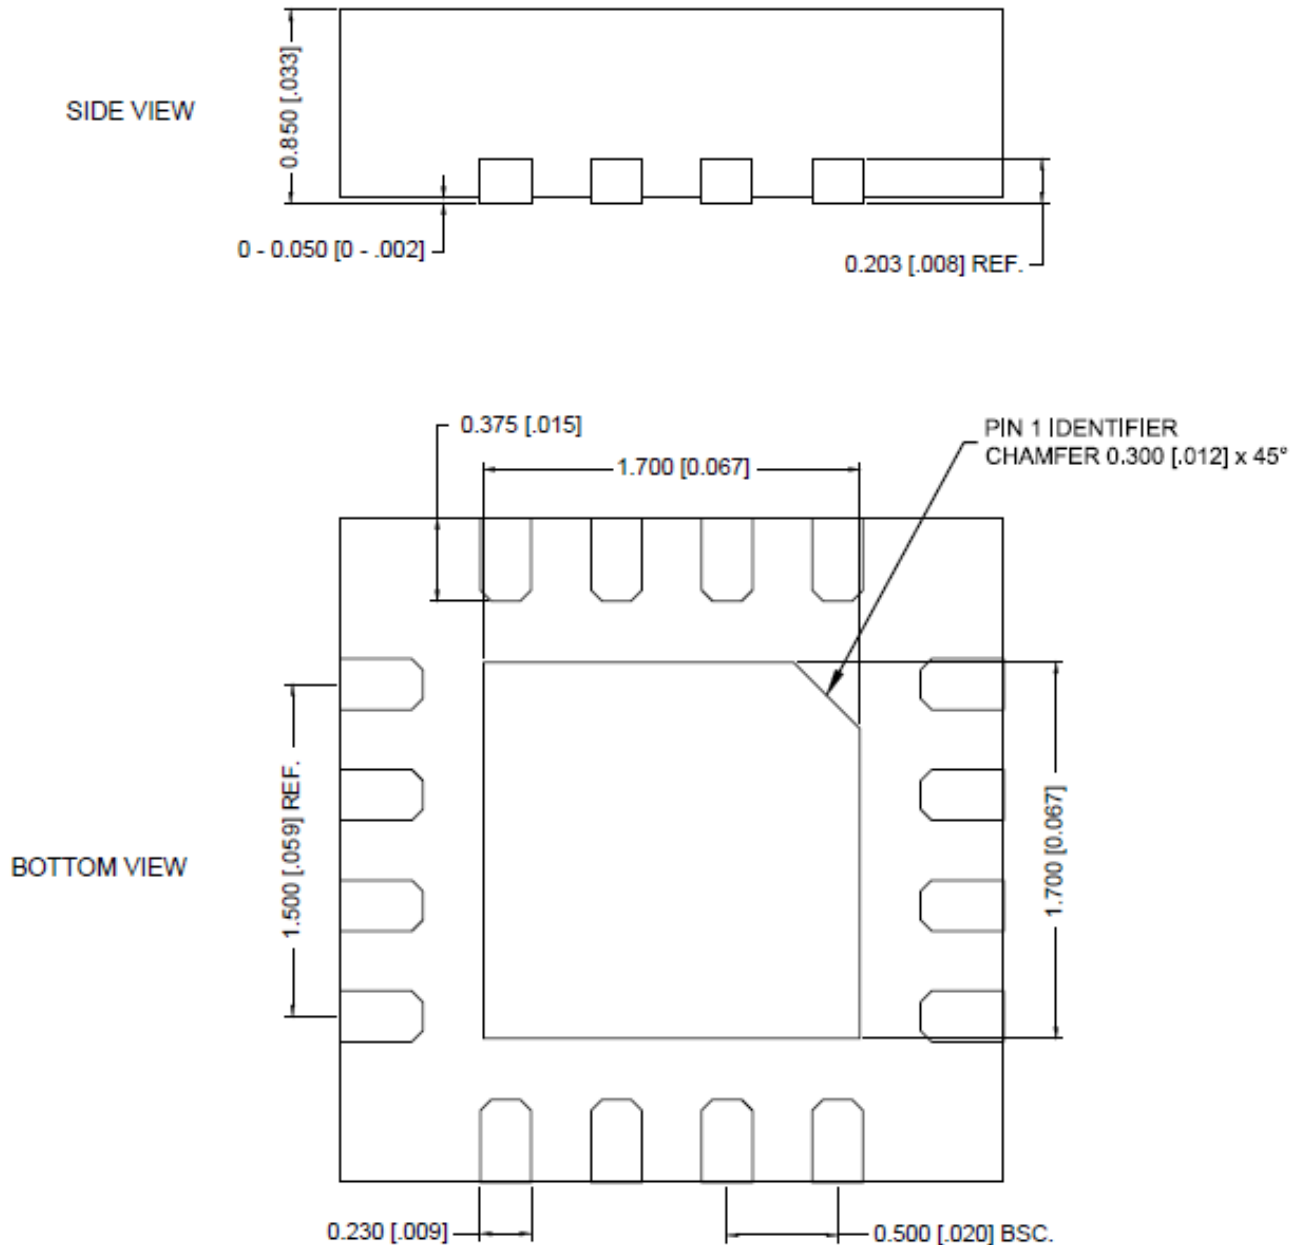

3 x 3 16-pin QFN

Notes:

1. Dimensions in millimeters

Package Marking

