



Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

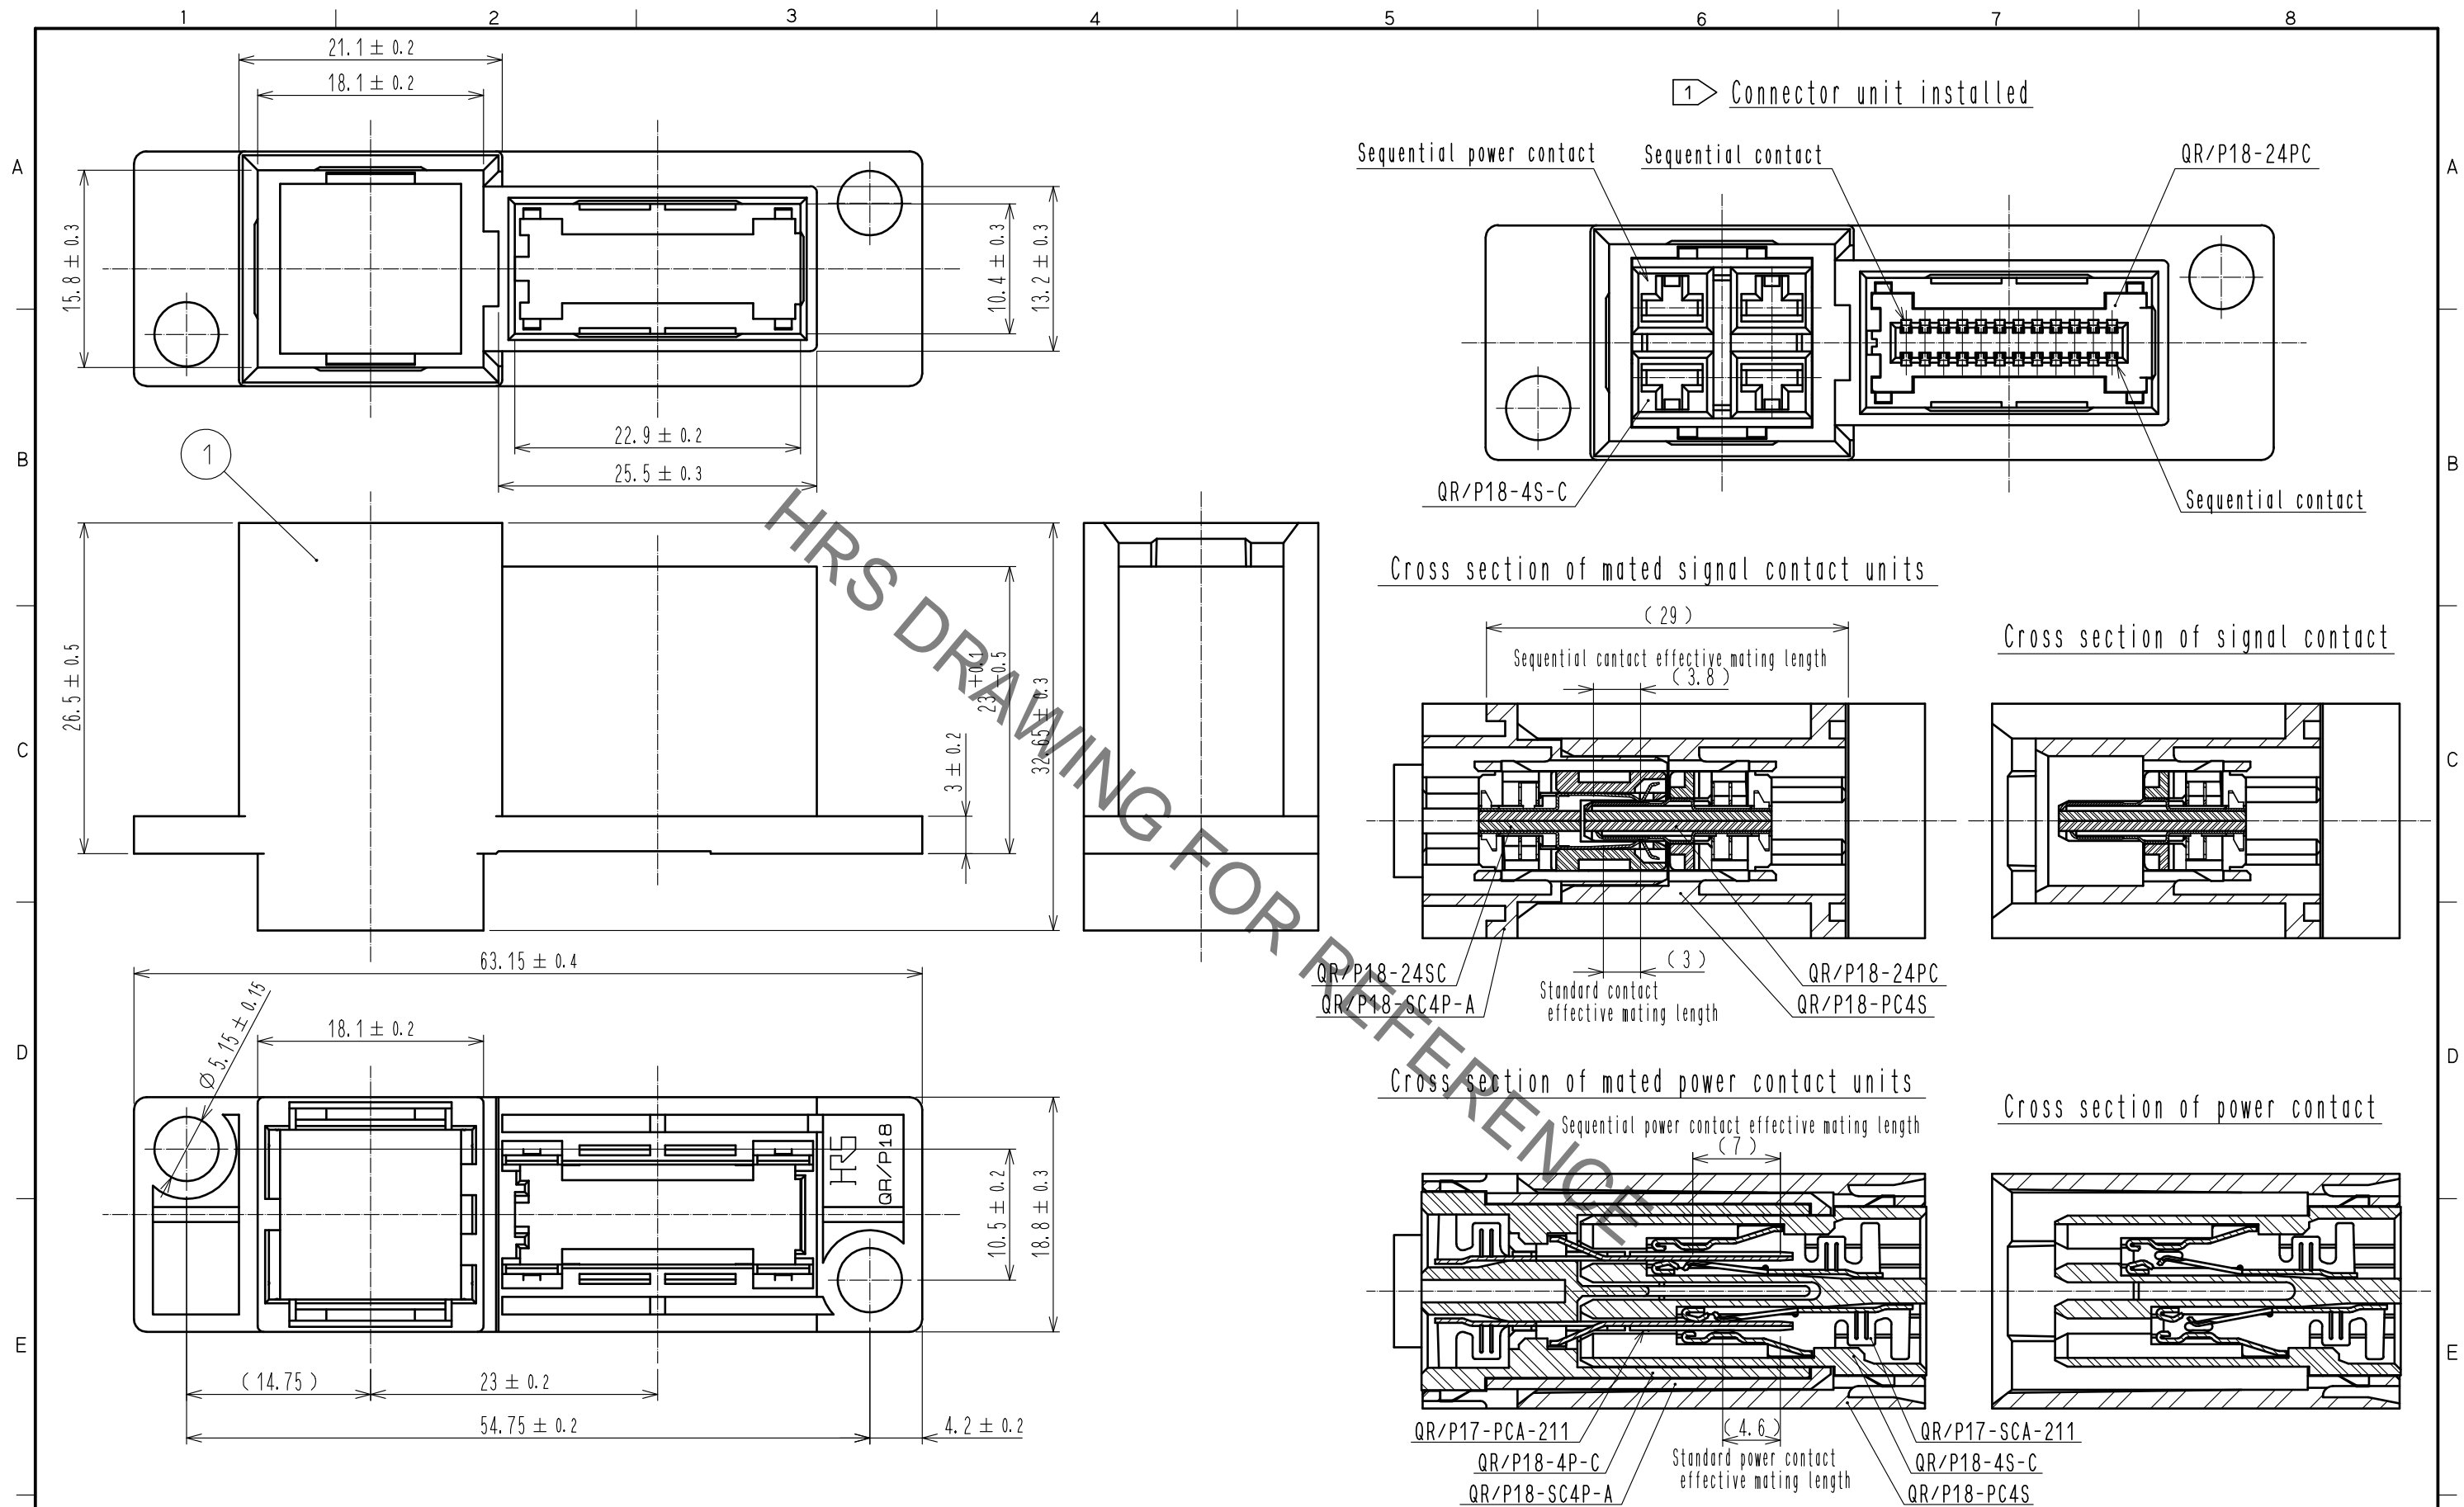

- Notes
- 1 This connector shall be assembled with the connector unit QR/P18-24PC(CL221-0295-3) to which cable is harnessed and QR/P18-4S-C(CL221-0314-6) with QR/P17-SCA-211(CL221-0262-4) to which cable is harnessed.
 - 2 Use the QR/P15-Screw (CL221-0251-8) when mounting to the panel.
 - 3 The connector can be moved 0.75mm or more from center.
 - 4 The dimensions in parentheses are for reference.

1	PBT	Black . UL94V-0					
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm		2 : 1					
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	18.06.12	DRAWING NO.		EDC-125285-00-00	
		CHECKED : RI. TAKAYASU	18.06.12	PART NO.		QR/P18-PC4S	
		DESIGNED : AH. KODAMA	18.06.11	CODE NO.		CL221-0297-9-00	
		DRAWN : SJ. SATO	18.06.11				

Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

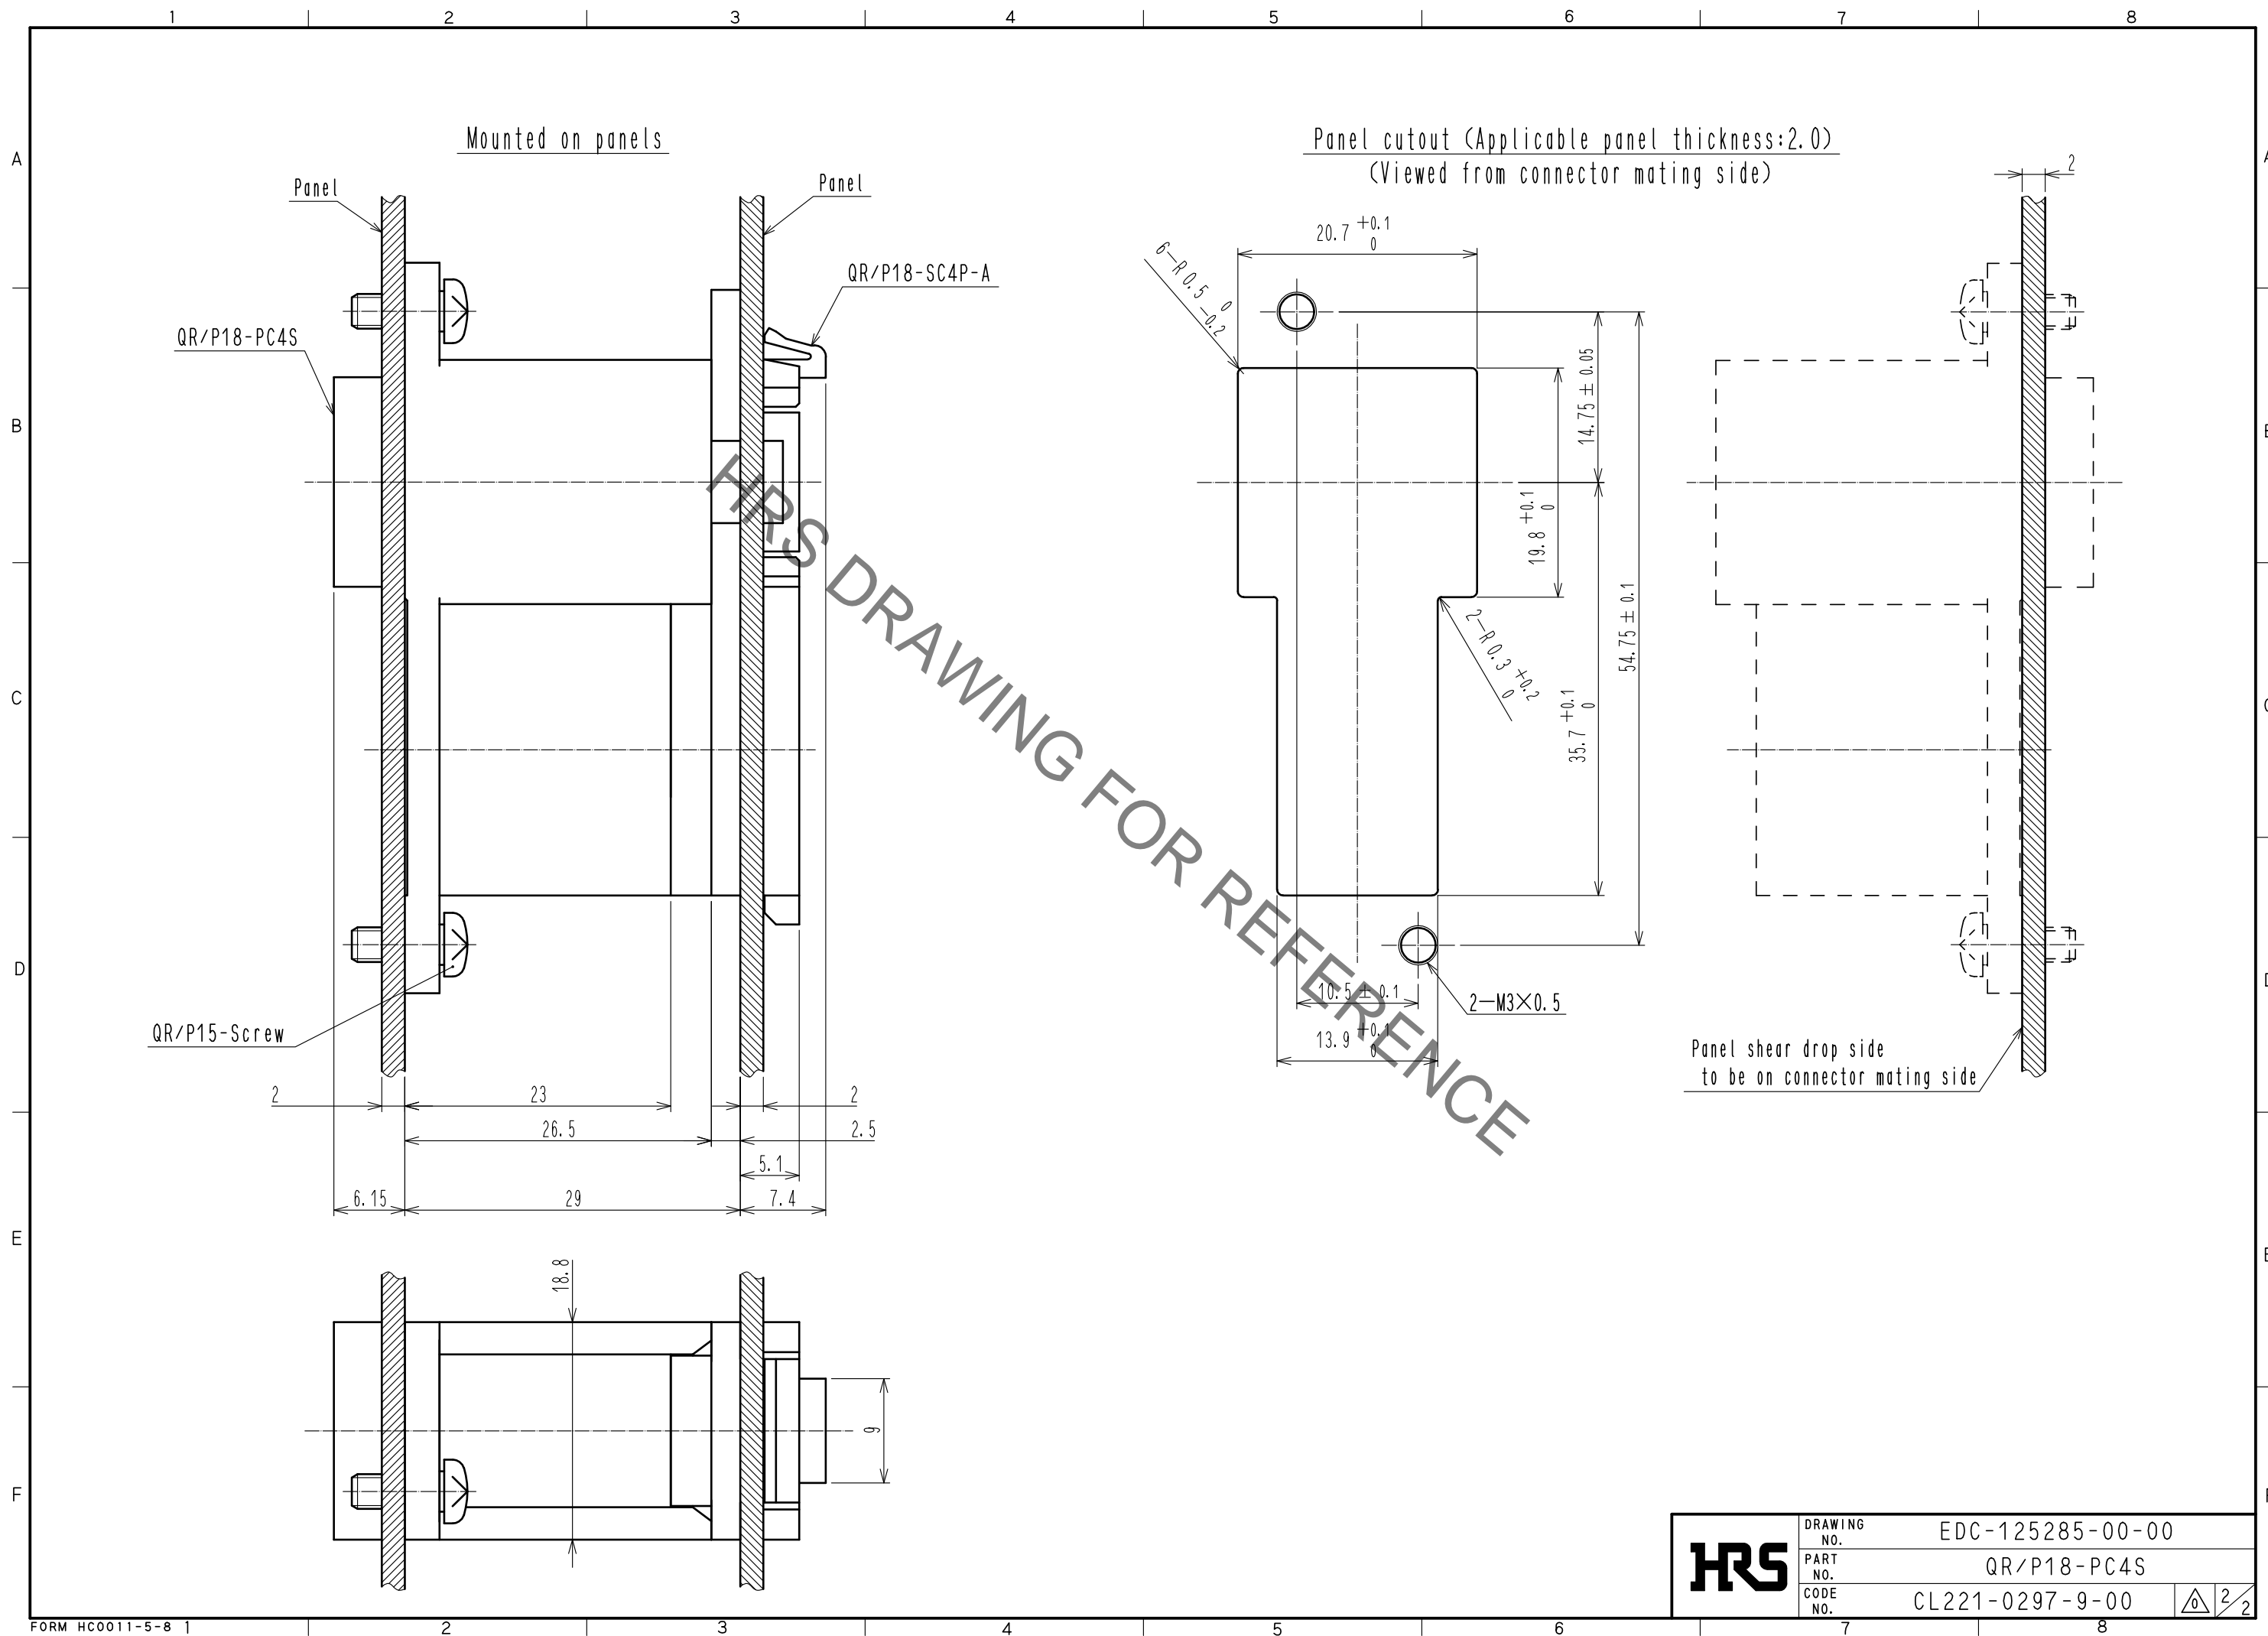

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-125285-00-00	2/2
	PART NO.	QR/P18-PC4S	
	CODE NO.	CL221-0297-9-00	