


**MALE SHORT-CIRCUIT CAP
WITH CHAIN**

R161.862.000
SERIES N

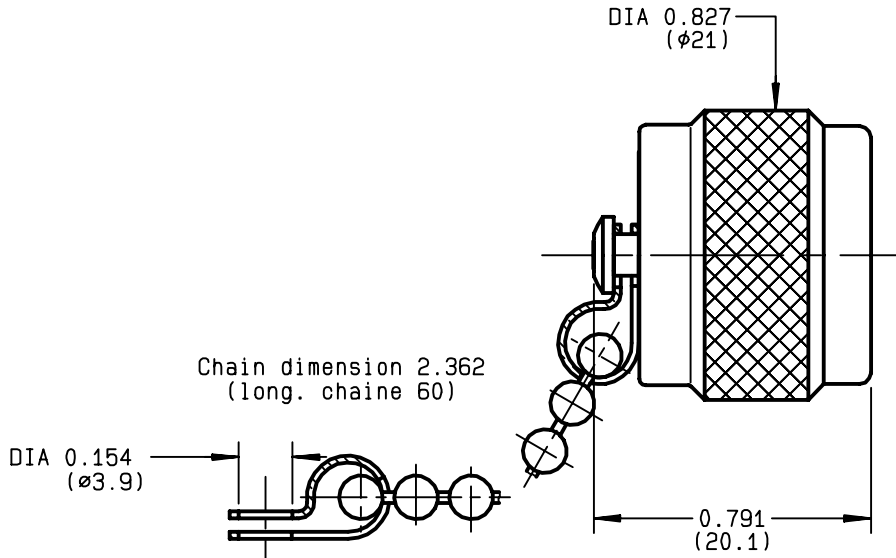

NOMINAL IMPEDANCE	NA Ω	CABLES :		
FREQUENCY RANGE	NA GHz			
TEMPERATURE RATING	-55/+155 °C			
V.S.W.R	NA + x F(GHz)Maxi			
RF INSERTION LOSS	NA √F(GHz) dB Maxi			
VOLTAGE RATING	NA Veff Maxi			
DIELECTRIC WITHSTANDING VOLTAGE	NA Veff Mini			
INSULATION RESISTANCE	NA MΩMini		OTHERS CHARACTERISTICS	
HERMETIC SEAL	NA Atm.cm ³ /s		CABLE RETENTION	NA N Mini
LEAKAGE (pressurized only)	NA		CENTER CONTACT RETENTION	
MECHANICAL DURABILITY	500 Cycles	Axial force - mating end	NA N Mini	
WEIGHT	32 gr	Axial force - opposite end	NA N Mini	
SPECIFICATION		Torque	NA cm.N Mini	
		RECOMMENDED TORQUES		
		Mating	130 cm.N	
		Panel nut	NA cm.N	
		Clamp nut	NA cm.N	

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR		-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES	BRASS	BBR 2	

ISSUE	CREATION DATE	FILE PART-NUMBER
9812N01	17/06/1993	EPC 96-07



BONOMINI

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future