



BETWEEN SERIES ADAPTERS




Fig. 1

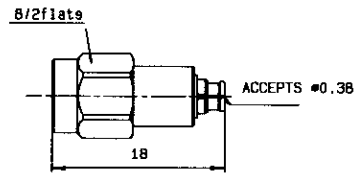


Fig. 2




Fig. 3




Fig. 4

| Part number | Impedance | Fig. | Captive center contact | Finish | Note |
|--------------|-----------|------|------------------------|-----------------|---|
| R191 966 001 | 50 | 1 | Yes | passivated | SMA 2.9 male/SBMO male full detent |
| R191 967 002 | 50 | 2 | Yes | passivated/gold | SMA 2.9 male/SBMO female |
| R191 968 001 | 50 | 3 | Yes | passivated | SMA 2.9 female/SBMO male full detent |
| R191 969 002 | 50 | 4 | Yes | passivated/gold | SMA 2.9 female/SBMO female |

CABLE ASSEMBLIES

We can provide low loss cable assemblies, equipped with SBMO connectors. Please consult us.

| PART NUMBER | DESCRIPTION |
|--------------|--|
| R191 966 001 | SMA 2.9 male/ SBMO male <i>full detent</i> |
| R191 967 002 | SMA 2.9 male/ SBMO female |
| R191 968 001 | SMA 2.9 female / SBMO male <i>full detent</i> |
| R191 969 002 | SMA 2.9 female / SBMO female |
| R222 051 000 | Straight connector solder type for .047" cable (with female center contact) |
| R222 052 000 | Straight connector solder type for .085" cable (with female center contact) |
| R222 151 000 | Right angle connector solder type for .047" cable (with female center contact) |
| R222 152 000 | Right angle connector solder type for .085" cable (with female center contact) |
| R222 251 000 | Two hole flange connector solder type for .047" cable (with male center contact) |
| R222 450 001 | 2 hole flange shroud <i>full detent</i> |
| R222 450 301 | 2 hole flange shroud <i>limited detent</i> |
| R222 550 001 | Thread-in shroud <i>full detent</i> |
| R222 550 301 | Thread-in shroud <i>full detent</i> |
| R222 561 001 | Thread-in receptacle (with male center contact) <i>full detent</i> |
| R222 561 301 | Thread-in receptacle (with male center contact) <i>limited detent</i> |
| R222 705 000 | In series adapter |
| R280 752 000 | Glass seal |