

8MM DUPLEX R3C MALE HOUSING+CRIMP SLEEVE


R197.235._82


Series: SMB CARLOCK

To obtain th complete P/N please fill in the blank "_" with the coding letter

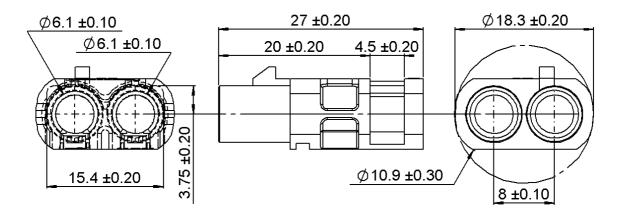

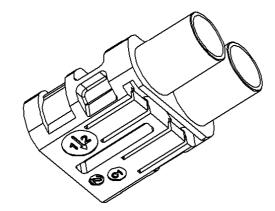

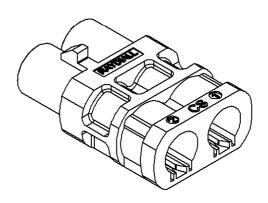



Housing to be used with:

R299.197.000 + R299.197.900 R299.197.010 + R299.197.900

| All dimensions are in mm. | | | 1 |
|---------------------------|------------------------|-------------------|-----------|
| COMPONENTS | MATERIALS | PLATING | (μm) |
| | | UL CLASSIFICATION | COLOR |
| HOUSING | PA6.6 GF15 (POLYAMIDE) | UL 94 V-2 | See Page2 |

PACKAGING

| Standard | Other |
|----------|------------|
| 3000 | Contact us |

MECHANICAL CHARACTERISTICS

ENVIRONMENTAL

-40/+110 ° C Mating life 100 Cycles mini Operating temperature

Weight **1,91** g

Issue: 1609


In the effort to improve our products, we reserve the right to make changes judged to be



8MM DUPLEX R3C MALE HOUSING+CRIMP SLEEVE

R197.235._82

Series: SMB CARLOCK

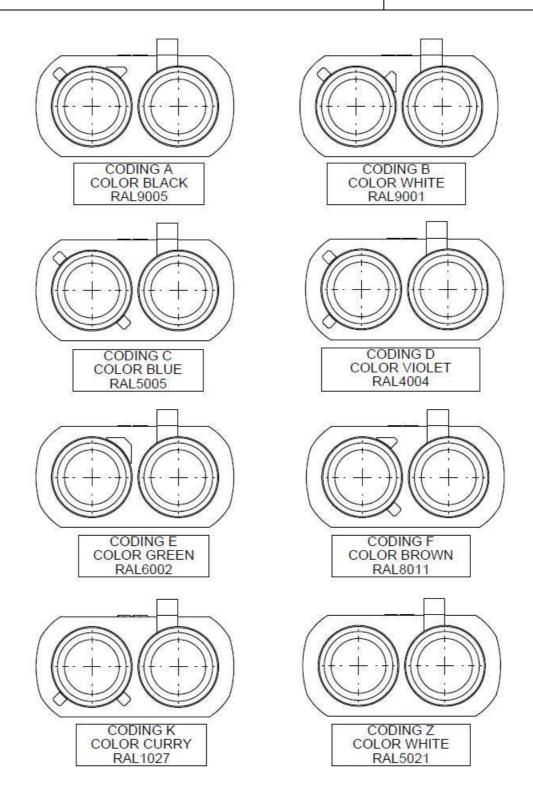

- -For other Coding, please contact us
- -To obtain the complete P/N please fill in the blank "_" with the coding letter

Issue: 1609 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



8MM DUPLEX R3C MALE HOUSING+CRIMP SLEEVE


R197.235._82

Series: SMB CARLOCK

RECOMMENDED MOUNTING PROCEDURE



• Pre-insertion of the coax into the housing

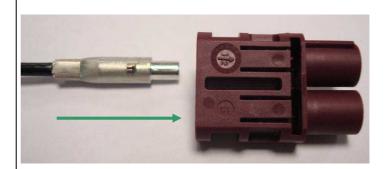

• Orientation of the tab of the coax with the slot of the housing.







• Push the connector into the housing until it clip on.







- Rotate the coax 180° into the housing to insure the positioning
- Repeat the operation 1 and 2 to insert the coax into the second way.



Issue: 1609

In the effort to improve our products, we reserve the right to make changes judged to be

