

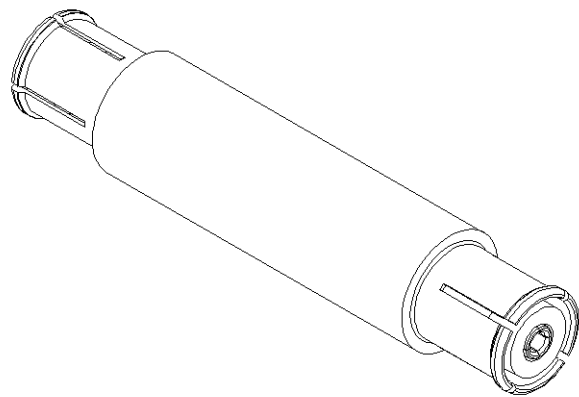



PAGE 1/3	ISSUE <b>08-11-16B</b>	SERIES <b>SMP-MAX</b>	PART NUMBER <b>R222M40107</b>
----------	------------------------	-----------------------	-------------------------------

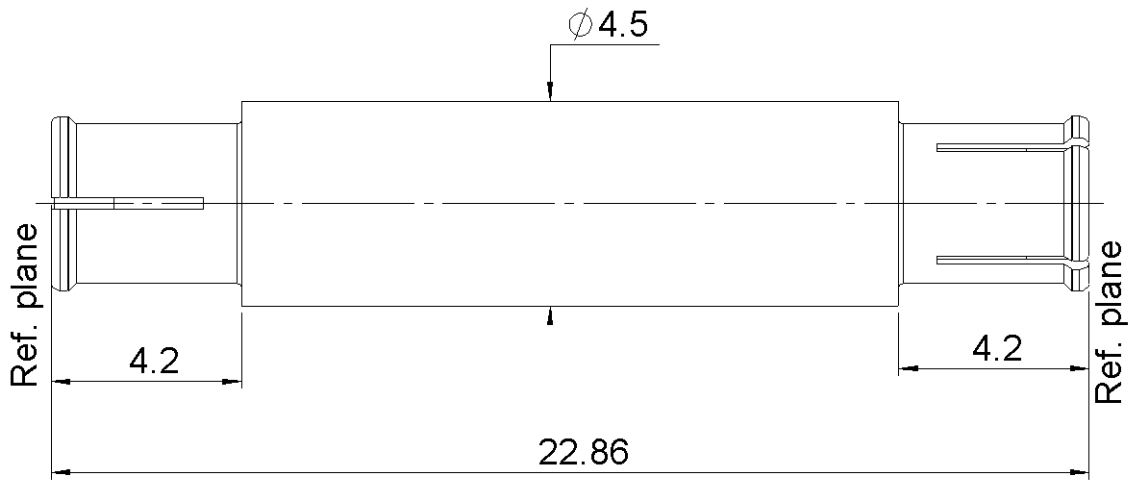

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	<b>BERYLLIUM COPPER</b>	<b>BBR</b>
Center contact	<b>BERYLLIUM COPPER</b>	<b>NPGR</b>
Outer contact		
Insulator	<b>PTFE</b>	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/3	ISSUE <b>08-11-16B</b>	SERIES <b>SMP-MAX</b>	PART NUMBER <b>R222M40107</b>
----------	------------------------	-----------------------	-------------------------------

PACKAGING

Standard	Unit	Other
<b>100</b>	<b>Contact us</b>	<b>Contact us</b>

ELECTRICAL CHARACTERISTICS

Impedance **50** Ω  
 Frequency **0 - 10** GHz  
 VSWR (max.) / Return Loss (max.)

DC - 2 GHz	2 – 4 GHz	4 – 6 GHz
1.07 / -30dB	1.12 / -27dB	1.14 / -24dB

Insertion loss **< 0.05\*** √F(GHz) dB  
 RF leakage - ( **NA** - F(GHz)) dB  
 Voltage rating **335** Veff Maxi  
 Dielectric withstanding voltage **1000** Veff mini  
 Insulation resistance **5000** MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention  
 Axial force – Mating End **7** N mini  
 Axial force – Opposite end **7** N mini  
 Torque **NA** N.cm mini

Radiall working range **0.0000** mm  
 Warning: To ensure a blind mate assembly, please check the pull-in range of the mating receptacle.

Recommended torque  
 Mating **NA** N.cm  
 Panel nut **NA** N.cm

Mating life **100** Cycles mini  
 Weight **1.5300** g

ENVIRONMENTAL

Operating temperature **-55/+165** °C  
 Hermetic seal **NA** Atm.cm3/s  
 Panel leakage **NA**

SPECIFICATION

OTHER CHARACTERISTICS

Assembly instruction:

Others:

**\*Coaxial Transmission Line Only**  
**Radial working angle: 3°min**  
**Axial working range : 1.6mm**  
**RoHS Compliant**

**Because of the BBR plating, the typical values of the outer contact resistance may slightly differ compared to the NPGR plated adapters**