


PLUG MML H2.0 - BULKHEAD JACK SMA

R302.205.003

CABLE 1.13/50 S-BR, LENGTH 10CM

Series : MML

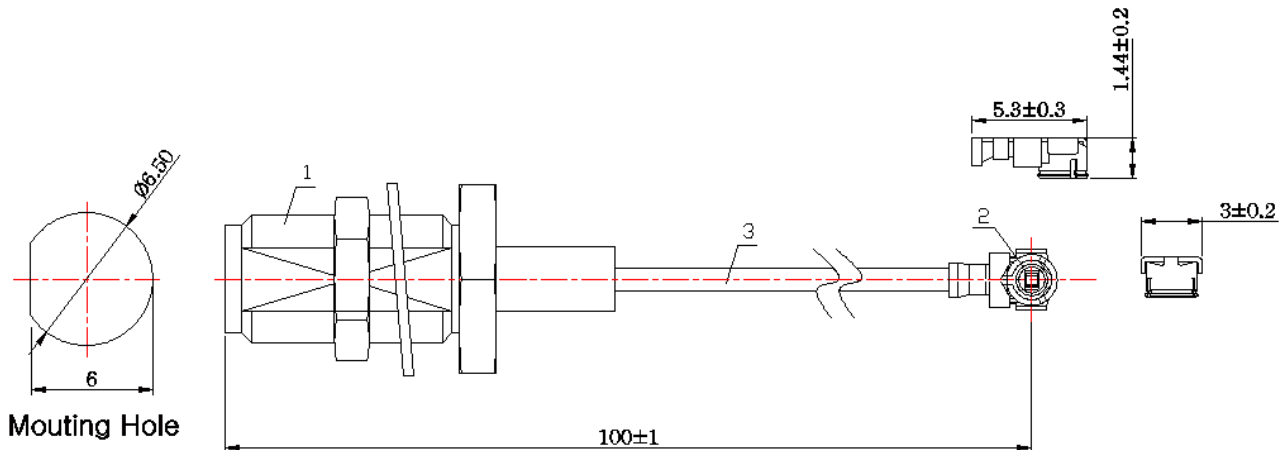

- * 1 * Connector A : **SMA JACK(GOLD PLATED) BULKHEAD**
- * 2 * Connector B : **MML*PLUG(GOLD PLATED) H2.0**
- * 3 * Cable : **1.13/50 S BLACK**

ELECTRICAL CHARACTERISTICS

SPECIFICATION

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	1.5 + 0,000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
Voltage rating	200 Veff Maxi
Dielectric withstanding voltage	200 Veff mini
Insulation resistance	500 MΩ mini

Weight	3,6000 g
Cable retention	12.74 N mini
Mating life	30 cycles
Others :	

