


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

1 W DC - 1 GHz 1.6/5.6 male COAXIAL TERMINATION

issue  
18.feb.93

Page  
1 / 1

**DRAWING**



General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**


FREQUENCY RANGE	: DC - 1 GHz
IMPEDANCE	: 75 Ohms
DC RESISTANCE	: 75 Ohms ± 2%
V.S.W.R :	DC - 0.5 GHz : ≤ 1.08
	0.5 - 1 GHz : ≤ 1.15
PEAK POWER at 25°C (1µs,1%.)	: 500 W
AVERAGE POWER at 25°C	: 1 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS	: 1.6/5.6 male per IEC 169-13
WEIGHT	: < 10 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C)	: -55 , +125
STORAGE TEMPERATURE RANGE (°C)	: -55 , +125

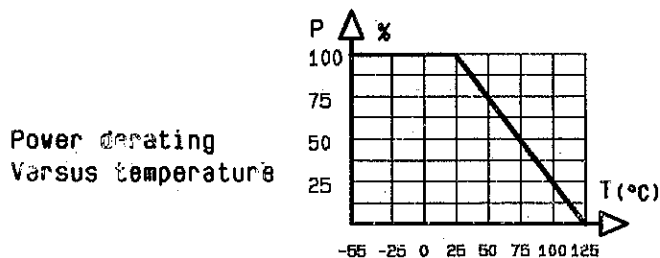

QUALITY Dpt app.	MO B			
CREATION	18.feb.93	New drawing	VE	
PEN :	06.nov.92	New format	FG	
EP : EP H 9301	20.sep.89	New format	KL	
Nom : KL				
Date:12.sep.89	ISSUE	REVISIONS	NAME	