



RADIALL
MICRONDE department

R 443162000

**TECHNICAL
DATA SHEET**


TITLE

0.1 - 40 GHz DC-BLOCK

LTR.

A

DRAWING:

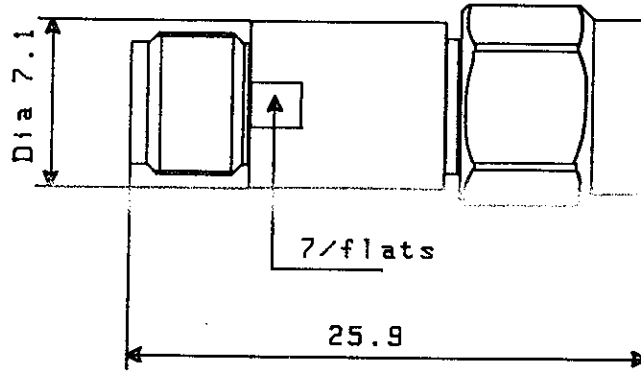

GENERAL TOLERANCES : ± 0.5 mm

ELECTRICAL CHARACTERISTICS :

FREQUENCY RANGE : 0.1 - 40 GHz
 IMPEDANCE : 50 Ohms

FREQUENCY		0.1 - 18 GHz	18 - 40 GHz
V.S.W.R.	max	1.25	1.35
INSERTION LOSS	max	0.35 dB	0.60 dB
BREAKDOWN VOLTAGE	max	100 V dc	

MECHANICAL CHARACTERISTICS:

CONNECTORS : SMA 2.9 male/female
 WEIGHT : 7 grams

ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : - 40°C + 85°C

Tentative data subject to change without notice.

3294 - 8902

PEN	QUALITY Dpt App.					
	R4	B				
PAGE 1/1	DATE 06/04/90	NAME K. LUCIEN	LTR	REVISIONS		DATE APP.
RADIALL 101 Ph. Hoffmann Street. Z.I. West - 93116 ROSNY/S/BOIS - France Phone (1) 48 54 80 40-Twx Radia 235 220						