

1000BASE – TSINGLE PORT TRANSFORMER MODULES

Industrial grade



- Compliant with IEEE 802.3 standards
- 350µH OCL with 8mA DC bias at 100KHz 100mV
- Lead finish: Pure tin
- Moisture Sensitivity Level: 1


Electrical Specifications @ 25 °C – Operating Temperature – 40 °C to +85 °C

Part Number	Insertion Loss (dB MAX)	Return Loss (dB MIN)					Crosstalk (dB MIN)				CM to CM rejection Ratio (dB MAX)					Dielectric Withstanding Voltage @60s (Vrms MIN)
	0.1-100 MHz	1 MHz	40 MHz	60 MHz	80 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz	125 MHz	
R5032NL	-1.2	-18	-16	-12	-10	-8	-50	-44	-37	-33	-42	-31	-25	-21	-19	1500

Notes: 1. Add suffix "T" to part number for Tape & Reel package (ie: R5032NLT).

Mechanical

R5032NL

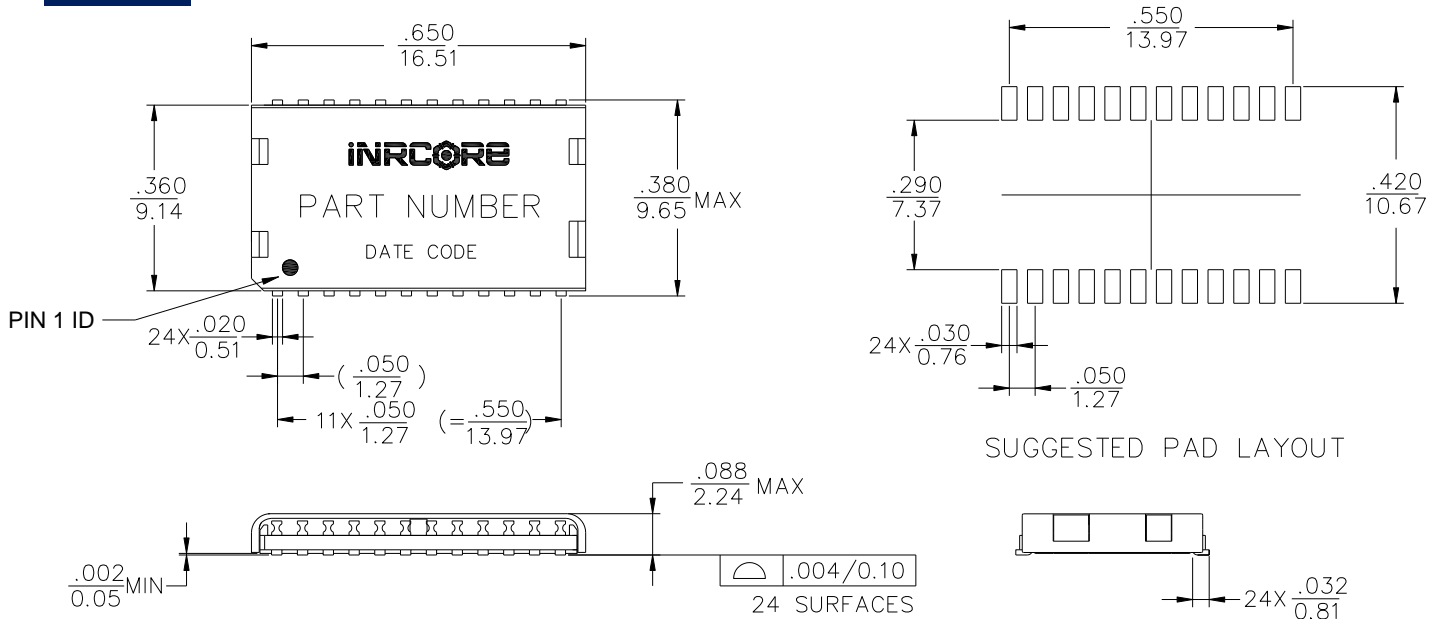

WEIGHT.....0.70 GRAMS MAX
 TAPE & REEL.....1000PCS/REEL
 TUBE.....30PCS/TUBE

DIMENSIONS: $\frac{\text{INCHES}}{\text{MM}}$

UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE $\pm \frac{.010}{0.25}$



1000BASE-T SINGLE PORT TRANSFORMER MODULES

Industrial grade



Electrical Schematic

R5032NL

