


Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 1 of 9 | | Publish Date | Jul. 05, 2018 | |

● FUNCTIONS

1. Rotation detecting for horizontal PCB.
2. Vibration detecting for vertical PCB.

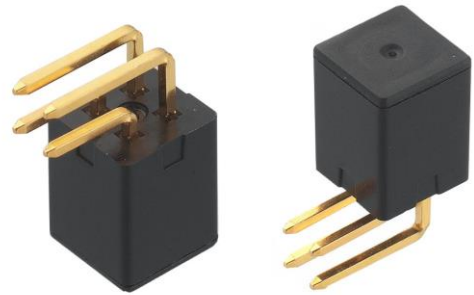

● APPLICATIONS

1. Rotation Detection for LCD monitor
2. Alarm system
3. Wake up systems for power saving, such like remote controllers
4. Automatically power off for Sporting equipment
5. Toys, Entertainment devices



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 2 of 9 | | Publish Date | Jul. 05, 2018 | |

● FEATURES

1. PCB direction for applications:
 - Suitable for horizontal PCB: Rotation detecting.
 - Suitable for vertical PCB: Vibration detecting.
2. Switch State:
 - Rotation detection: DIP Normal close.
 - Vibration detection:

RBS130200 acts like a normally close switch which chatters open and close as it is tilted or vibrated. Note that the RBS130200 is not guaranteed to be close --- occasionally the sensing mechanism may remain close when at rest. The engineer should design his or her software to look for high-to-low and low-to-high edge transitions rather than an open or closed state of the switch.
3. Gold-plated ball and terminals, low possibility of oxidization.
4. Housing made of high insulation plastic material, free from electric conduction and rust problem.
5. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
6. Simple ON and OFF signals, easy for design.
7. RoHS compliance, an ideal substitute for mercury switch.
8. A more economical tilt and rotation detection option than IC design solution.
9. All made in Taiwan and examined before shipment.



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 3 of 9 | | Publish Date | Jul. 05, 2018 | |

● PATENTS

1. Taiwan Patent No. I 261280
2. U.S.A. Patent No. US 7,473,857 B2
3. U.S.A. Patent No. US 7,256,360 B1
4. China Patent No. ZL 200610078234.3
5. China Patent No. 201220308500.8




Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 4 of 9 | | Publish Date | Jul. 05, 2018 | |

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)


Fig. 1

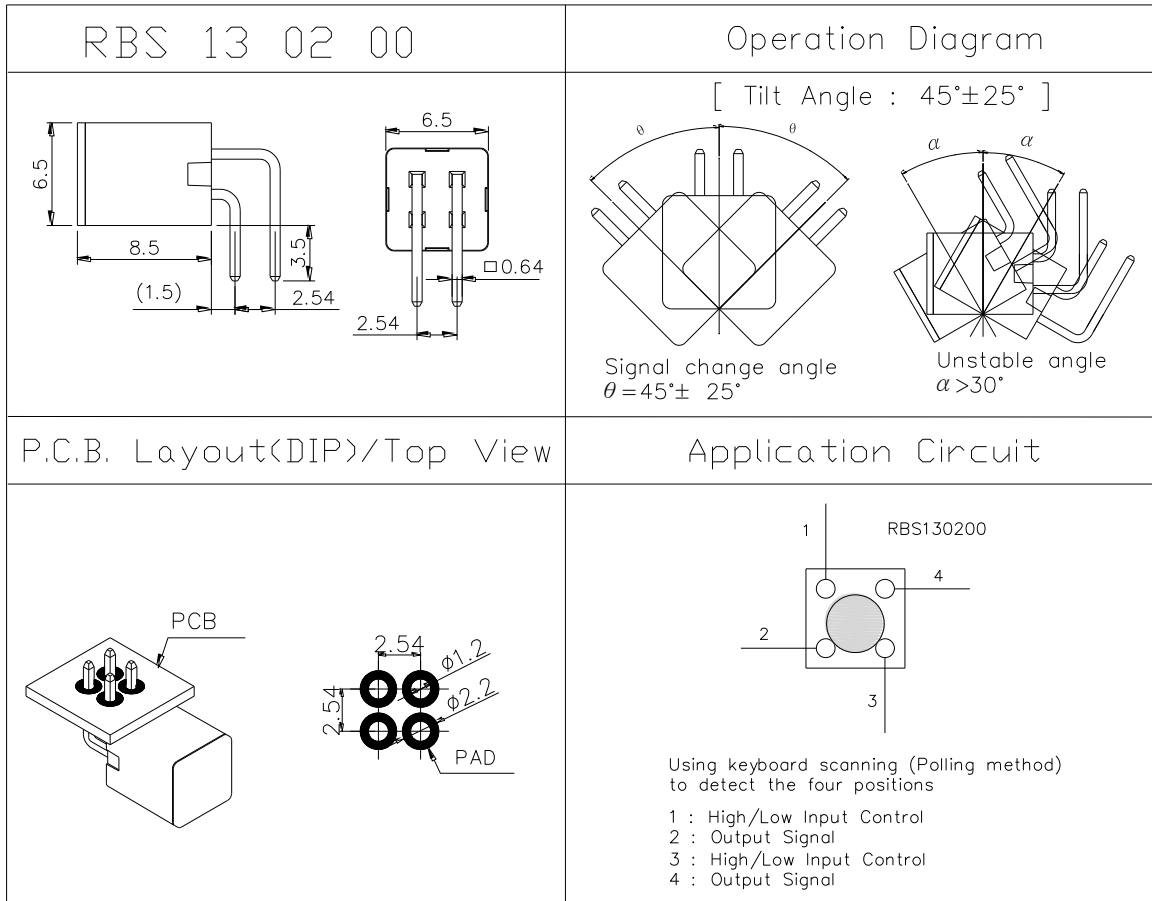

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 5 of 9 | | Publish Date | Jul. 05, 2018 | |

Fig. 2

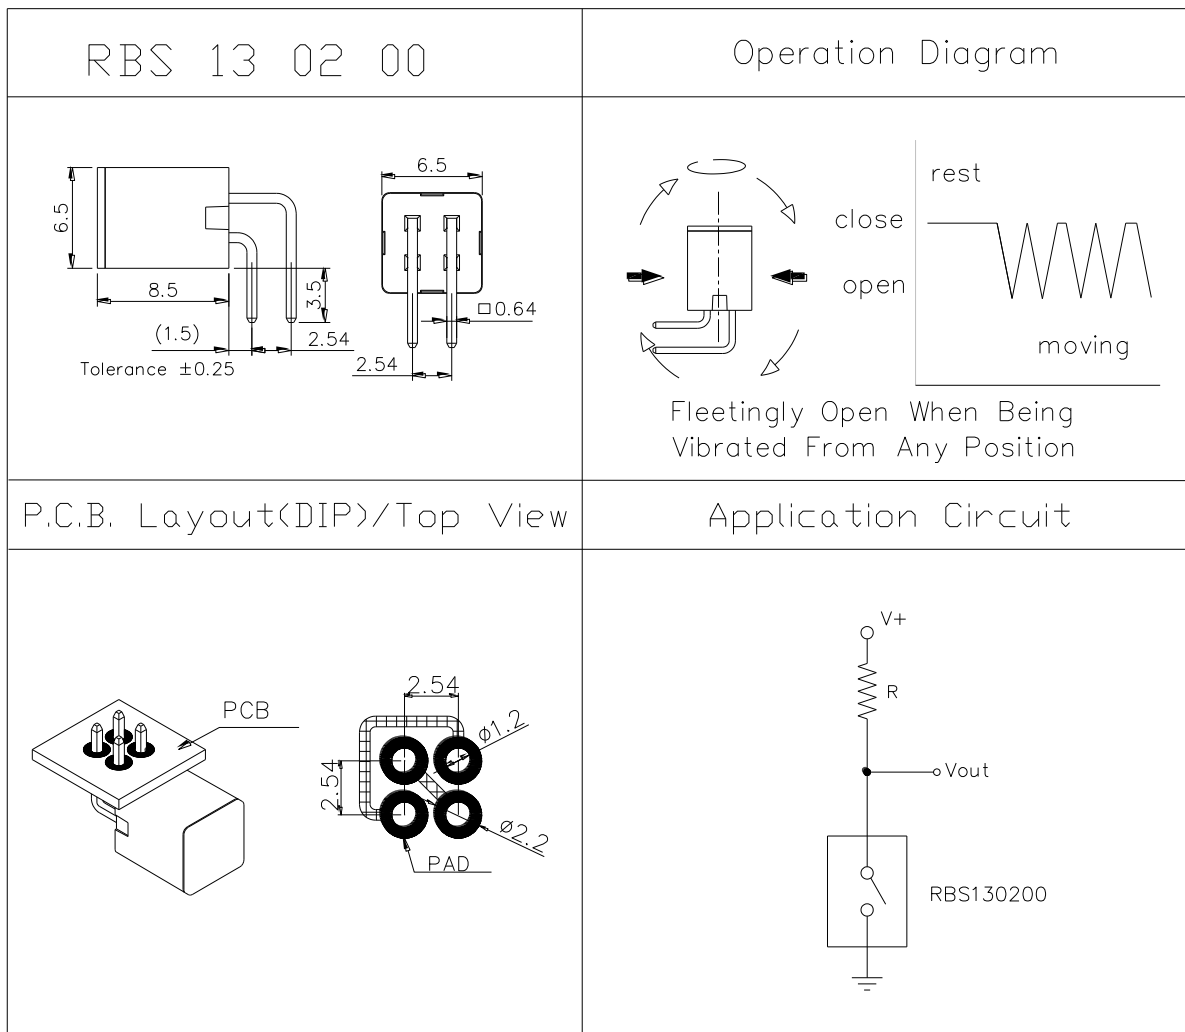

Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 6 of 9 | | Publish Date | Jul. 05, 2018 | |

● Current/Voltage Suggested

| Input Current (mA) | Operating Voltage (V) | Condition |
|--------------------|-----------------------|-----------|
| 1.0 | 5 | -- |

● ELECTRICAL CHARACTERISTICS

| | | |
|---|---|------------------------|
| 1 | Contact Rating | 10 mA, 5 VDC |
| 2 | Contact Resistance (For rotation detection only) | 10 Ω max. |
| 3 | Operation Diagram | Refer to Fig. 1 |
| 4 | Insulation Resistance | 1000 MΩ min., 100 VDC |
| 5 | Dielectric Strength | 500 VDC min., 1 minute |
| 6 | Capacitance | 5 pF max. |
| 7 | Conductive Rate | 96% min. |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 7 of 9 | | Publish Date | Jul. 05, 2018 | |

● RELIABLE TEST ITEMS

Reliable Test for RBS130200

| | Test Item | Test Content |
|---|-----------------------|-------------------------------------|
| 1 | Operation Temperature | -25°C ~ 85°C |
| 2 | Storage Temperature | -40°C ~ 85°C |
| 3 | Humidity | 40 °C / 95 %RH |
| 4 | Mechanical Life | 2 Hz, horizontal 1,000,000 times |
| 5 | Electrical Life | 100,000 times |

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

| Condition | Soldering Temperature | Soldering Time | Wattage of Manual Soldering | Type |
|-----------------------------|-----------------------|------------------|--|------|
| Suitable Production Process | | | | |
| Wave Soldering | 260±5°C | < 5 seconds max. | - | DIP |
| Manual Soldering | 300±5°C | < 3 seconds max. | 30W or Temperature-controlled manual soldering | DIP |



Tilt Sensor Switch

| | | | | | |
|----------|-----------|-------------|--------------|---------------|----|
| Item No. | RBS130200 | Description | Ball-Contact | Version | 12 |
| Page | 8 of 9 | | Publish Date | Jul. 05, 2018 | |

● PACKAGE

| | Part Number | Package | Quantity | Total | Dimension (mm) |
|----|-------------|-----------|-----------|------------|----------------|
| 1. | RBS130200 | PE Bag | 500 pcs | 500 pcs | 205L*145W |
| | | Inner Box | 8 PE Bags | 4,000 pcs | 348L*191W*85H |
| | | Carton | 3 Boxes | 12,000 pcs | 364L*278W*213H |

※ Package shown as below for reference.

