



Laird’s tri-band RD2458-5 series offers high-gain (3dBi/2.4 GHz & 5 dBi/5GHz) omnidirectional performance. These antennas are designed for indoor use and are both rugged and reliable. The heavy duty knuckle designed into the antenna gives the flexibility for angular adjustments at 0°, 45°, and 90°.

The antenna features a 360° horizontal transmission pattern and a 90° vertical transmission pattern. These antennas offer a choice of connector options for maximum design flexibility (SMA, RPSMA, and RPTNC).

### FEATURES AND BENEFITS

- Tri-band operation – 2.4 GHz, 5.3 GHz, and 5.8 GHz
- Knuckle detents – 0°, 45°, and 90° (N-male not applicable)
- Extends the range of wireless access points and wireless bridges
- SMA, RPSMA, RPTNC, and N-male connector versions available

### ELECTRICAL SPECIFICATIONS

Part Number	RD2458-5			
Operating Frequency (MHz)	2400	5150	5400	5725
Gain (dBi)	3	5	5	5
VSWR	1.5:1			
Nominal Impedance (Ohms)	50			
Max Power - Ambient 25°C (W)	10			
Operating Temperature – °C (°F)	-10 to +70 (+14 to +158)			

### MECHANICAL SPECIFICATIONS


Dimensions (Height x Diameter) – mm (in.)	155 x 12.7 (6.1 x 0.5)
Weight – g (oz.)	22.7 (0.8)

### CONFIGURATION


PART NUMBER	CONNECTOR
RD2458-5-SMA	SMA male connector
RD2458-5-RSMA	RPSMA male connector
RD2458-5-RTNC	RPTNC male connector

### RADIATION PATTERNS


**2450 MHz**

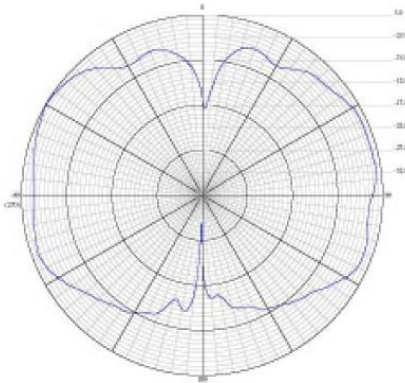

**5150 MHz**

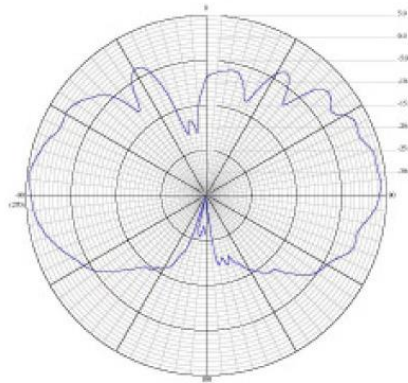

**5750 MHz**

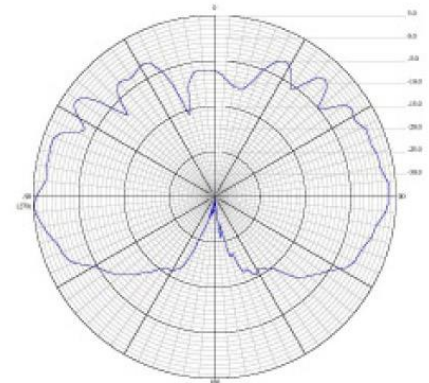

**Americas:** +1.847.839.6925  
 IAS-AmericasSales@lairdtech.com  
**Europe:** +44.1628.858941  
 IAS-EUSales@lairdtech.com  
**Asia:** IAS-AsiaSales@lairdtech.com  
**Middle East and Africa:** +44.1628.858941  
 IAS-MEAUSales@lairdtech.com  
[www.lairdtech.com](http://www.lairdtech.com)

### ✓RoHS

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2018 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

