




AEC-Q200

This component was always RoHS compliant from the first date of manufacture.

# RF1417D

## 315.0 MHz SAW Filter



**SM3838-8 Case**  
3.8 x 3.8

- **Ideal Front-End Filter for Domestic Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Tape and Reel Standard per ANSI/EIA-481**



The RF1417D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 315.0 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices (especially for automotive keyless entry) operating in the USA under FCC Part 15, in Canada under RSS-210, and in Italy

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFMi's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C Absolute Frequency	$f_c$		314.85	315.00	315.15	MHz
Insertion Loss	$IL_{MIN}$			1.6	2.5	dB
3 dB Bandwidth	$BW_3$		500	600	800	kHz
Rejection Attenuation: (relative to $IL_{min}$ )	10 - 295 MHz		46	51		dB
	295 - 305 MHz		41	46		
	305 - 310 MHz		27	30		
	310 - 313 MHz		17	20		
	313 - 314 MHz		7	10		
	316 - 320 MHz		20	24		
	320 - 325 MHz		15	18		
	325 - 335 MHz		43	48		
	335 - 600 MHz		55	60		
600 - 1000 MHz		55	60			
Temperature Freq. Temp. Coefficient	FTC			0.032		ppm/ °C <sup>2</sup>
Frequency Aging Absolute Value during the First Year	fA			≤10		ppm/yr
Impedance @ $f_c$	Input $Z_{IN}=R_{IN}  C_{IN}$	$Z_{IN}$	4930Ω//2.09pf			
	Output $Z_{OUT}=R_{OUT}  C_{OUT}$	$Z_{OUT}$	4930Ω//2.09pf			
Lid Symbolization (Y=year WW=week S=shift)	550 , YWWS					
Standard Reel Quantity	Reel Size 7 Inch		500 Pieces/Reel			
	Reel Size 13 Inch		3000 Pieces/Reel			



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


**NOTES:**

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.


Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C

### Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	Ground
4	Case Ground
5	Output
6	Output Ground
7	Ground
8	Case Ground

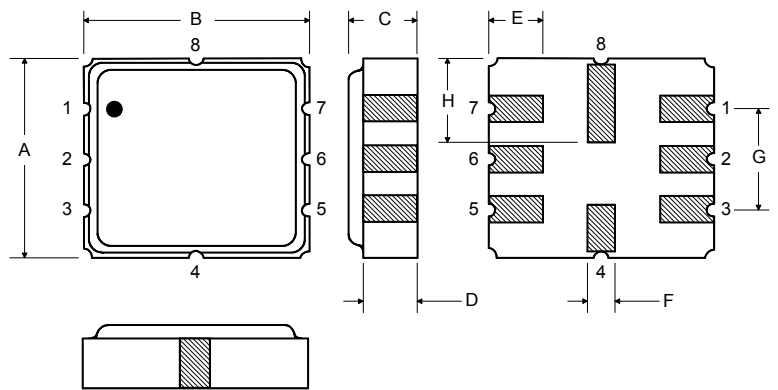

### Matching Circuit to 50Ω

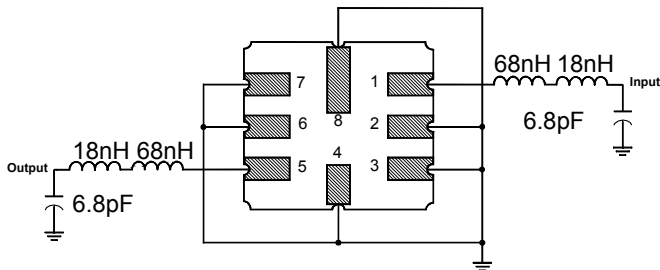

### Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	3.6	3.8	4.0	0.14	0.15	0.16
B	3.6	3.8	4.0	0.14	0.15	0.16
C	1.00	1.20	1.40	0.04	0.05	0.055
D	0.95	1.10	1.25	0.033	0.043	0.05
E	0.90	1.0	1.10	0.035	0.04	0.043
F	0.50	0.6	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080

Optional

### Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Ground
4	Case Ground
5	Output Ground
6	Output
7	Ground
8	Case Ground

### Matching Circuit to 50Ω

