

# Slide Potentiometer Standard Type ( Super Slide™ )

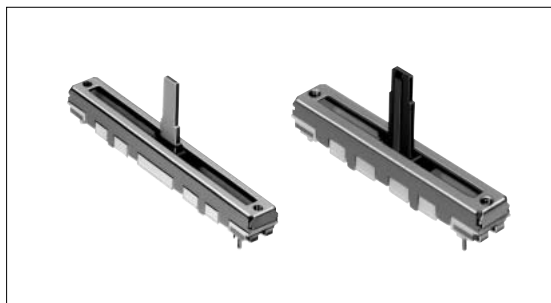
RS 1 Series



Solderable with auto dipping and available in a wide variety.

Rotary Potentiometers

Slide Potentiometers



## Typical Specifications

Items	Specifications
Total resistance tolerance	± 20%
Maximum operating voltage	50V AC, 10V DC
Operating force	0.3 to 2.5N
Operating life	15,000cycles
Operating temperature range	- 25 to + 70

## Product Line

### Insulated lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever (mm)	Total resistance (k)	Resistance taper	Detent	Mounting plate	Minimum packing unit (pcs.)	Products No.	Drawing No.
Single-unit	30	J-1	5	10	15A	Without	Without	1,000	RS301111J00P	1
							With		RS301111AJ01R	2
		50	Without	RS301111J00R	1					
			With	RS301111J00W						
	45	A	10	10	1B	Without	Without		RS301111AJ01K	2
							With		RS301111A01G	3
		C					Without		RS301111C01L	4
							With		RS301111AC00V	5
Dual-unit	30	B	5	3B	With	Without	RS451111ABA02	6		
		C				Without	RS30112AC00J	7		
		J-1					With	RS30112AJA02	8	

### Metal lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever (mm)	Total resistance (k)	Resistance taper	Detent	Mounting plate	Minimum packing unit (pcs.)	Products No.	Drawing No.		
Single-unit	15	9-1	10	10	15A	Without	With	1,000	RS151111A900B	9		
							Without		RS301111A9012	10		
	30	4	15	20	1B		Without		RS3011114A02	11		
							With		RS301111A602N	12		
	45	9-1	10	10	15A		Without		RS451111A900F	13		
							With		RS4511119A04	14		
		6	15				10		10	Without	RS60111YA600M	15
										With	RS60111Y19004	16
	60	9-1	10	15	1B		Without		Without	RS60111Y1600Q	17	
									With	RS451121400A	18	
Dual-unit	45	4	20	20	15A	With	Without	RS45112A400G	19			
							With	RS60112A600N	20			
	60	6	15	15	15A		Without	RS60112A600U				
							With					

## Note

Products other than those listed in above products are also available. Please contact us for details.

Refer to **P.408** for product varieties.  
Refer to **P.408** for configuration details.

Dimensions		Unit:mm
No.	Style	PC board mounting hole dimensions
1		
2		
3		
4		

The length of the operating part ( L<sub>1</sub> ) can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

Rotary  
 Potentiometers  
 Slide  
 Potentiometers

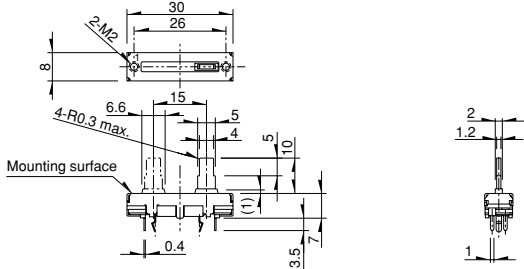
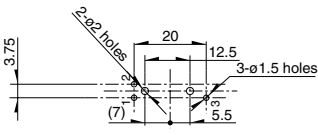
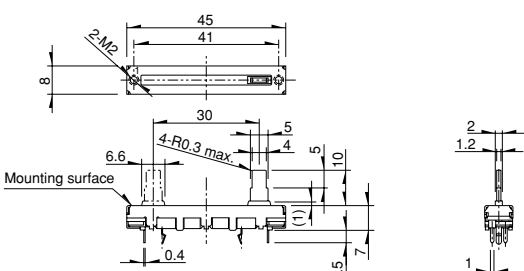
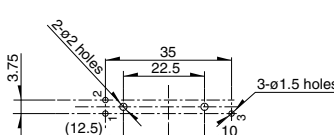
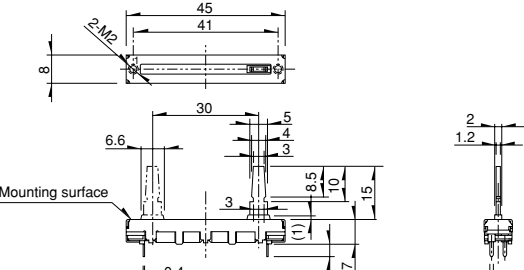
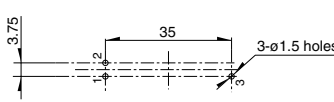
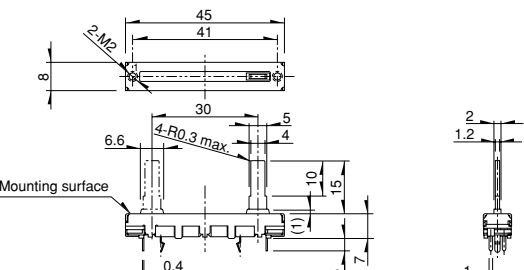
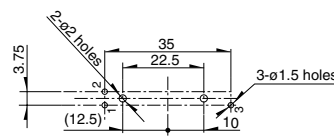
General-use  
 Mixer

No.	Style	PC board mounting hole dimensions
5		
6		
7		
8		

The length of the operating part ( L<sub>1</sub> ) can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
9		
10		
11		
12		

Rotary Potentiometers  
 Slide Potentiometers

General-use Mixer

The length of the operating part( L<sub>1</sub> )can be customized. Refer to P.408 for details.

**Dimensions**

Unit:mm

Rotary  
 Potentiometers  
**Slide  
 Potentiometers**

**General-use**  
 Mixer

No.	Style	PC board mounting hole dimensions
13		
14		
15		
16		

The length of the operating part( L ) can be customized. Refer to P.408 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions
17		
18		
19		
20		

Rotary Potentiometers  
 Slide Potentiometers

General-use Mixer

The length of the operating part( L; )can be customized. Refer to P.408 for details.

## Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

### Travel Distance Variety

Travel (mm)	15	20	30	45	60
-------------	----	----	----	----	----

### Total Resistance Variety

Total resistance (k)	10	20	50	100	200
----------------------	----	----	----	-----	-----

### Resistance Taper

Resistance taper	1B	4B	10A	15A
------------------	----	----	-----	-----

### Note

DC (10VDC) is also available. (Tapped types are not available)

### Lever Types

Unit:mm

Metal lever		Insulated lever	
Code	Dimensions	Code	Dimensions
General-use Mixer	<b>9-2</b> 	<b>J-1</b> 	
	<b>9-1</b> 	<b>A</b> 	
	<b>6</b> 	<b>C</b> 	
	<b>4</b> 		

### Corresponding Specifications

Unit:mm

Resistance taper	3B, 15C	Insulated lever configuration
Dust cover	Available	<b>B</b> 
Tap	Available (Only the center-positioned)	

### Terminal Layout/Circuit Diagram

Single-unit	Dual-unit (with lug terminal) (RS6011Y only)	Dual-unit
	<p>L : Lug terminal</p>	

### Note

marked are specifications recommended by ALPS.

Refer to P.408, 502 for resistance taper.

# Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

## Sample Part Number



Specify the travel distance from the below codes.

Travel (mm)	Code	Travel (mm)	Code
15	15	45	45
20	20	60	60
30	30		

Number of resistor elements

<b>Single</b>	1 (Enter "Y" for 60 mm travel)
<b>Dual</b>	2

Lever type/Length of operation unit (mm)

Insulated lever

Code	Configuration	Length
J1	J-1	5
0A	A	10
		15
0C	C	10
		15
0B	B	10
		15

Metal lever

Code	Configuration	Length
91	9-1	10
92	9-2	5
04	4	15
		20
06	6	15
		20

Length of operation unit

If the length is less than 10 mm, add a "0" before the number.  
(e.x., 5 mm length="05")

Detent

Code	Detent
C0	Without
C1	Center

Mounting plate

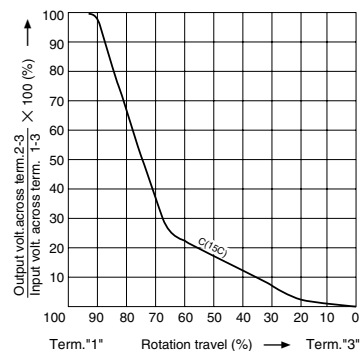
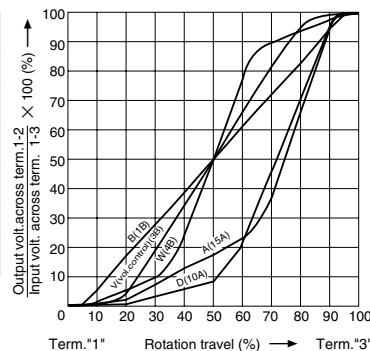
Code	Mounting plate
P0	Without
P1	With

Total resistance

Code	Total resistance (kΩ)	Code	Total resistance (kΩ)
103	10	104	100
203	20	204	200
503	50		

Resistance taper

Code	Resistance taper
A	15A
B	1B
D	10A
W	4B
V	3B
C	15C



B:For tone & general  
V:For vol.

## Note

marked are specifications recommended by ALPS.

Rotary Potentiometers  
Slide Potentiometers

General-use  
Mixer