



Main

| | |
|-------------------------------|----------------------------------|
| Range of Product | Harmony Electromechanical Relays |
| Product or Component Type | Socket |
| Contact terminal arrangement | Separate |
| Product compatibility | Plug-in relay RXM 3 C/O |
| Shape of pin | Flat |
| Device short name | RXZ |
| Sale per indivisible quantity | 10 |

Complementary

| | |
|---|--|
| [Ith] conventional free air thermal current | 10 A |
| [Ue] rated operational voltage | < 250 V |
| Connections - terminals | Connector, 1 x 0.25...1 x 2.5 mm ² AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² AWG 20...AWG 16) solid without cable end |
| Tightening torque | < 1 N.m M3 |
| Fixing mode | By screw panel) Clip-on 35 mm symmetrical DIN rail) |
| Marking | CE |
| Width | 1.06 in (27 mm) |
| Net Weight | 0.15 lb(US) (0.066 kg) |

Environment

| | |
|--|---------------------------------|
| [Uimp] rated impulse withstand voltage | 4 kV |
| Overvoltage category | III |
| Pollution degree | 3 |
| Standards | IEC 61984 |
| Product Certifications | UL Lloyd's CSA |
| Ambient Air Temperature for Storage | -40...185 °F (-40...85 °C) |
| Ambient Air Temperature for Operation | -40...131 °F (-40...55 °C) |
| IP degree of protection | IP20 conforming to EN/IEC 60529 |
| Dielectric strength | 2500 V |

Ordering and shipping details

| | |
|-------------------|--|
| Category | 21128-ZELIO ICE CUBE RELAY ACCESSORIES |
| Discount Schedule | CP2 |
| GTIN | 3389119404273 |
| Returnability | Yes |
| Country of origin | CN |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.06 in (2.7 cm) |
| Package 1 Width | 2.40 in (6.1 cm) |
| Package 1 Length | 3.23 in (8.2 cm) |
| Package 1 Weight | 2.15 oz (61 g) |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 4.57 in (11.6 cm) |
| Package 2 Width | 2.68 in (6.8 cm) |
| Package 2 Length | 5.51 in (14 cm) |
| Package 2 Weight | 22.01 oz (624 g) |
| Unit Type of Package 3 | S02 |
| Number of Units in Package 3 | 200 |
| Package 3 Height | 5.91 in (15 cm) |
| Package 3 Width | 11.81 in (30 cm) |
| Package 3 Length | 15.75 in (40 cm) |
| Package 3 Weight | 23.59 lb(US) (10.7 kg) |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

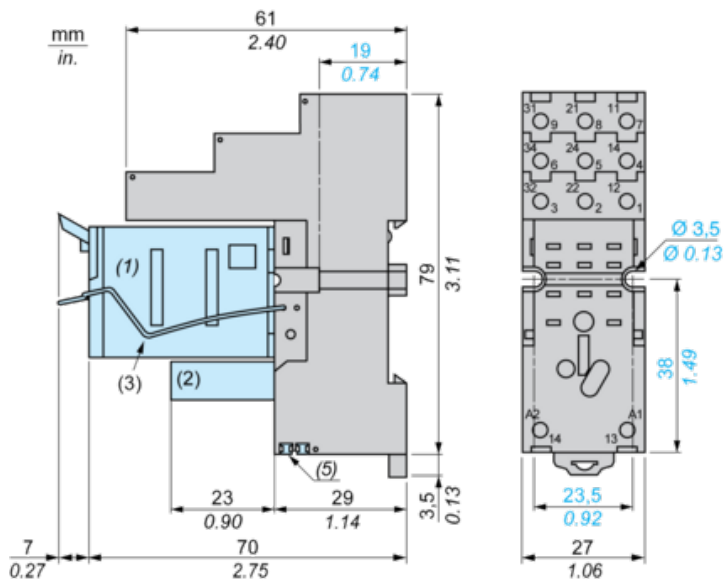

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$
- (5) 2 bus jumpers