



SB25UAFC

Surface Mount Schottky Barrier Rectifier

Voltage

50 V

Current

2 A

Features

- Low power loss, high efficiency
- High surge current capability
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC61249 Standard

SMAF-C



Mechanical Data

- Case : SMAF-C plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0012 ounces, 0.034 grams

Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	V
Maximum RMS Voltage	V_{RMS}	35	V
Maximum DC Blocking Voltage	V_R	50	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2	A
Peak Forward Surge Current : 8.3 ms Single Half Sine-Wave Superimposed On Rated Load	I_{FSM}	50	A
Typical Thermal Resistance <small>(Note 1)</small> <small>(Note 2)</small>	$R_{\theta JA}$	150	$^\circ\text{C}/\text{W}$
	$R_{\theta JL}$	17	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$



SB25UAFC

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	V_F	$I_F = 1 \text{ A}, T_J = 25^\circ\text{C}$	-	0.41	-	V
		$I_F = 2 \text{ A}, T_J = 25^\circ\text{C}$	-	0.47	0.52	
		$I_F = 1 \text{ A}, T_J = 125^\circ\text{C}$	-	0.32	-	
		$I_F = 2 \text{ A}, T_J = 125^\circ\text{C}$	-	0.41	-	
Reverse Current ^(Note 3)	I_R	$V_R = 40 \text{ V}, T_J = 25^\circ\text{C}$	-	10	-	uA
		$V_R = 50 \text{ V}, T_J = 25^\circ\text{C}$	-	-	100	
		$V_R = 50 \text{ V}, T_J = 125^\circ\text{C}$	-	11	-	mA

NOTES:

1. Mounted on a FR4 PCB, single-sided copper, standard footprint
2. Mounted on a FR4 PCB, single-sided copper, with 10cm x 10cm copper pad area
3. Short duration pulse test used to minimize self-heating effect



SB25UAFC

TYPICAL CHARACTERISTIC CURVES

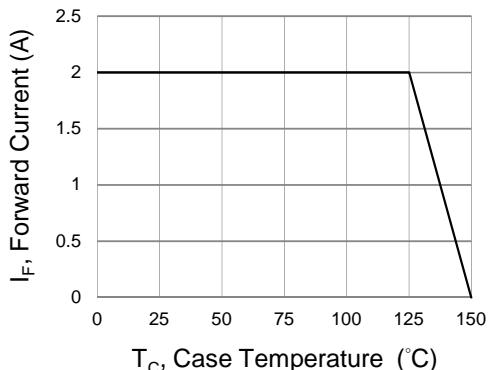


Fig.1 Forward Current Derating Curve

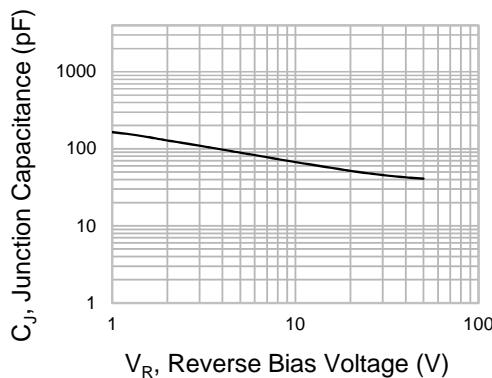


Fig.2 Typical Junction Capacitance

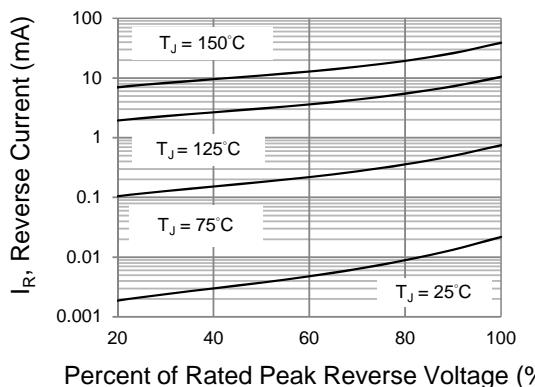


Fig.3 Typical Reverse Characteristics

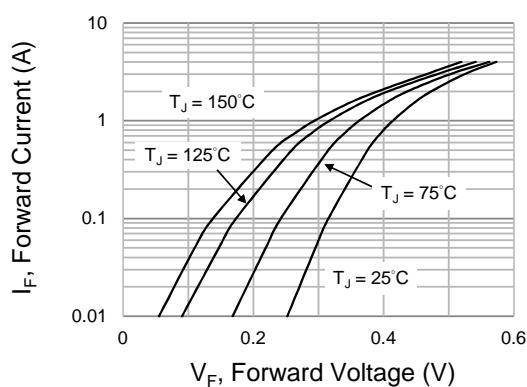


Fig.4 Typical Forward Characteristics

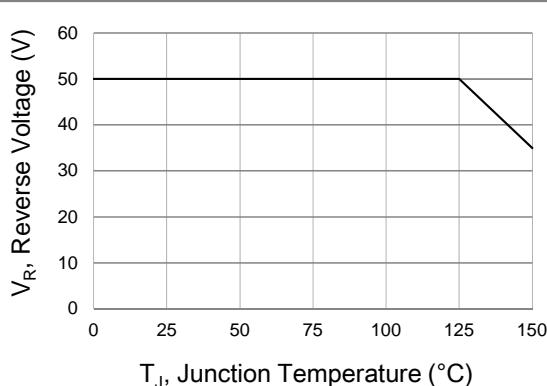


Fig.5 Operating Temperature Derating Curve



SB25UAFC

Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
SB25UAFC_R1_00001	SMAF-C	3K pcs / 7" reel	SB25U	Halogen free

Packaging Information & Mounting Pad Layout

