



# SB36AFC-AU

## Surface Mount Schottky Barrier Rectifier

Voltage

60 V

Current

3 A


### Features

- Low power loss, high efficiency
- High surge current capability
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Mechanical Data

- Case : SMAF-C plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0012 ounces, 0.034 grams

SMAF-C



### Maximum Ratings and Thermal Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	60	V
Maximum Rms Voltage	$V_{RMS}$	42	V
Maximum Dc Blocking Voltage	$V_{DC}$	60	V
Maximum Average Forward Current	$I_{F(AV)}$	3	A
Peak Forward Surge Current : 8.3ms Single Half Sine-Wave Superimposed On Rated Load	$I_{FSM}$	80	A
Typical Junction Capacitance Measured at 1 MHZ And Applied $V_R = 4 \text{ V}$	$C_J$	125	pF
Typical Thermal Resistance (Note 1) (Note 2)	$R_{\theta JA}$	150	$^\circ\text{C}/\text{W}$
	$R_{\theta JC}$	20	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_J$	-55~150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~150	$^\circ\text{C}$



## SB36AFC-AU

### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	$V_F$	$I_F = 1 \text{ A}, T_J = 25^\circ\text{C}$	-	0.44	-	V
		$I_F = 3 \text{ A}, T_J = 25^\circ\text{C}$	-	-	0.75	
		$I_F = 1 \text{ A}, T_J = 125^\circ\text{C}$	-	0.38	-	
		$I_F = 3 \text{ A}, T_J = 125^\circ\text{C}$	-	0.56	-	
Reverse Current <sup>(Note 3)</sup>	$I_R$	$V_R = 48 \text{ V}, T_J = 25^\circ\text{C}$	-	8.1	-	uA
		$V_R = 60 \text{ V}, T_J = 25^\circ\text{C}$	-	-	100	
		$V_R = 60 \text{ V}, T_J = 125^\circ\text{C}$	-	6	-	mA

#### NOTES:

1. Mounted on a FR4 PCB, single-sided copper, standard footprint
2. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area
3. Short duration pulse test used to minimize self-heating effect



# SB36AFC-AU

## TYPICAL CHARACTERISTIC CURVES

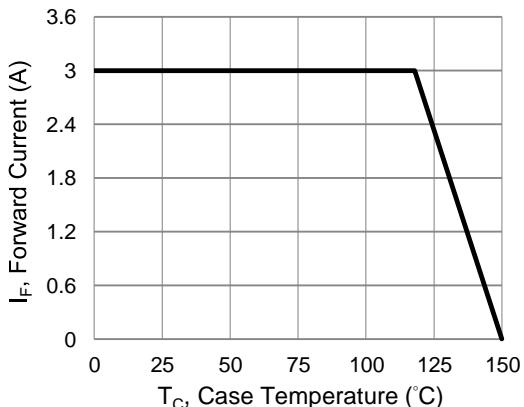


Fig.1 Forward Current Derating Curve

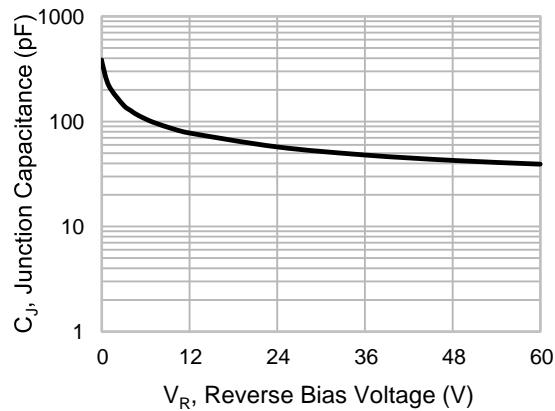


Fig.2 Typical Junction Capacitance

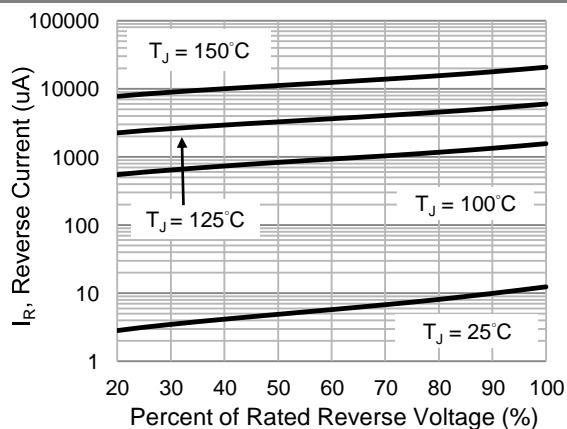


Fig.3 Typical Reverse Characteristics

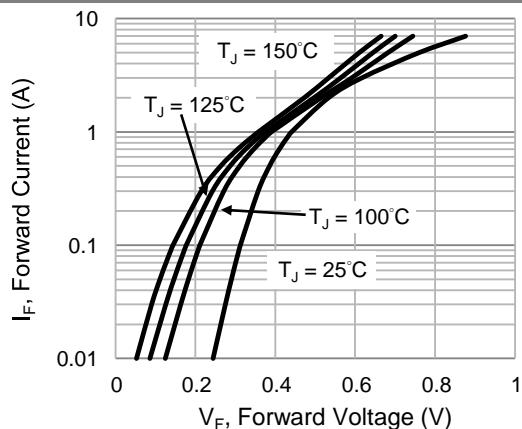


Fig.4 Typical Forward Characteristics

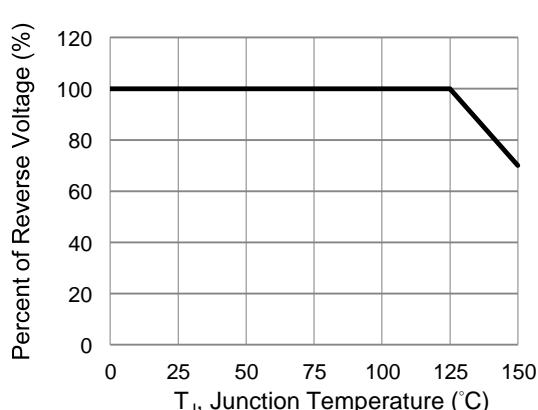


Fig.5 Operating Temperature Derating Curve



## SB36AFC-AU

### Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
SB36AFC-AU_R1_000A1	SMAF-C	3K pcs / 7" reel	SB36	Halogen free

### Packaging Information & Mounting Pad Layout

