



## SBA0820AS / SBA0830AS / SBA0840AS

### EXTREME LOW VF SCHOTTKY RECTIFIER

Voltage    20-40 V    Current    0.8 A

#### Features

- Ultra low forward voltage, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


#### Applications

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

#### Mechanical Data

- Case: Molded plastic, SOD-123
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00037 ounces, 0.0104 grams

SOD-123



Cathode    Anode

#### Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	SBA0820AS	SBA0830AS	SBA0840AS	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V
Maximum rms voltage	$V_{RMS}$	14	21	28	V
Maximum dc blocking voltage	$V_R$	20	30	40	V
Maximum average forward rectified current	$I_{F(AV)}$	0.8			A
Peak forward surge current: 8.3ms single half sine-wave Superimposed on rated load	$I_{FSM}$	2			A
Typical thermal resistance	$R_{\theta JC}^{(2)}$ $R_{\theta JA}^{(1)}$	100 510			$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	-55 to +150			$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150			$^\circ\text{C}$

#### Electrical Characteristics

PARAMETER	SYMBOL	TEST CONDITION		SBA0820AS		SBA0830AS		SBA0840AS		UNIT
				TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	
Forward voltage	$V_F$	$I_F = 10\text{mA}$	$T_J = 25^\circ\text{C}$	0.24	-	0.25	-	0.26	-	V
		$I_F = 100\text{mA}$		0.32	-	0.33	-	0.35	-	
		$I_F = 800\text{mA}$		-	0.55	-	0.6	-	0.7	
		$I_F = 10\text{mA}$	$T_J = 125^\circ\text{C}$	0.13	-	0.13	-	0.15	-	V
		$I_F = 100\text{mA}$		0.23	-	0.24	-	0.29	-	
Reverse current	$I_R^{(3)}$	$V_R = 10\text{V}$	$T_J = 25^\circ\text{C}$	4.6	-	4	-	1.3	-	$\mu\text{A}$
		$V_R = 20\text{V}$		-	100	9	-	1.9	-	
		$V_R = 30\text{V}$		-	-	-	100	3.1	-	
		$V_R = 40\text{V}$		-	-	-	-	-	50	
		$V_R = 20\text{V}$	$T_J = 125^\circ\text{C}$	1.7	-	1.4	-	0.5	-	mA
		$V_R = 30\text{V}$		-	-	3.5	-	0.8	-	
		$V_R = 40\text{V}$		-	-	-	-	1.3	-	

Note : 1. Mounted on a FR4 PCB, single-sided copper, mini pad.

2. Mounted on a FR4 PCB, single-sided copper, with  $100\text{cm}^2$  copper pad area.

3. Short duration pulse test used to minimize self-heating effect.



## SBA0820AS / SBA0830AS / SBA0840AS

### TYPICAL CHARACTERISTIC CURVES

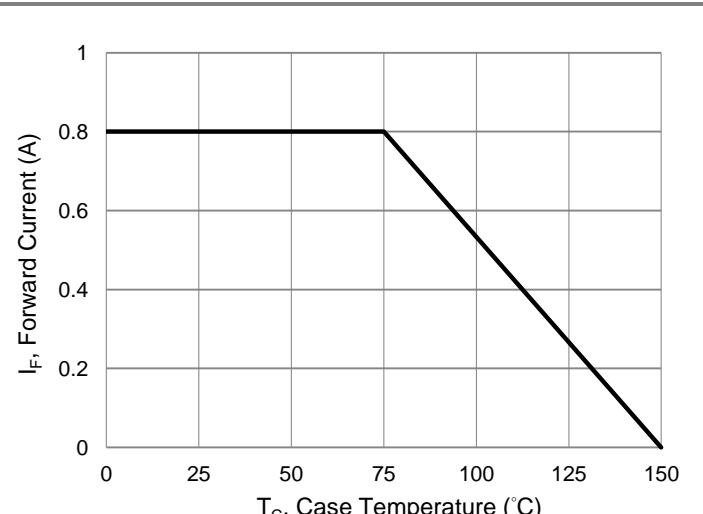


Fig.1 Forward Current Derating Curve

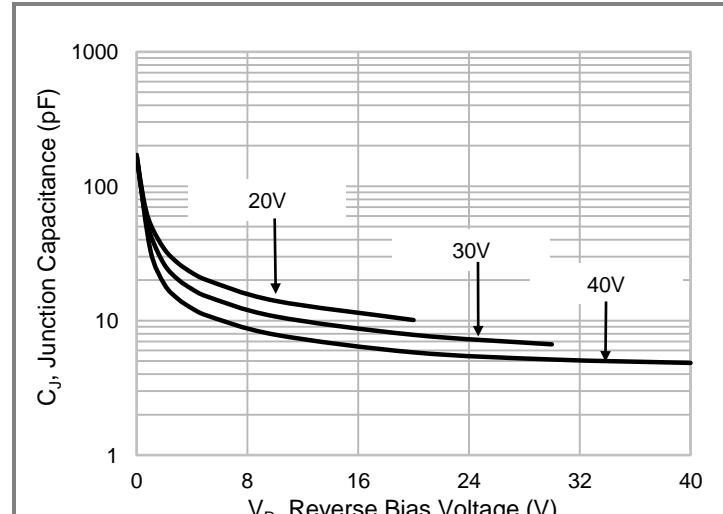


Fig. 2 Typical Junction Capacitance

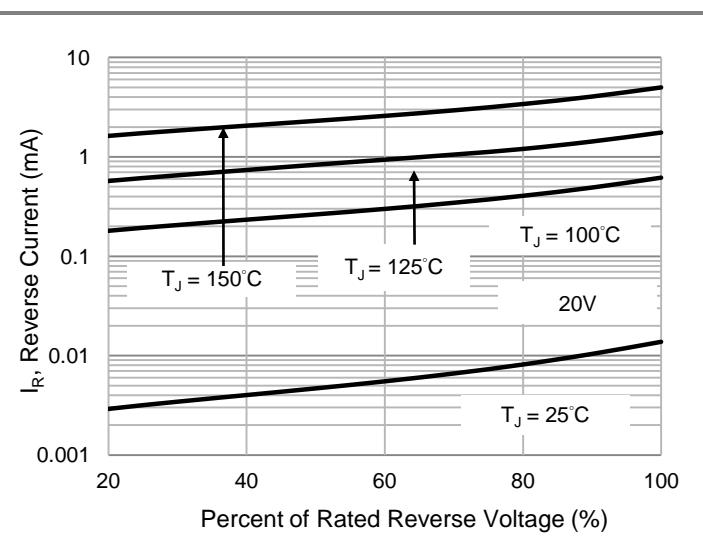


Fig.3 Typical Reverse Characteristics

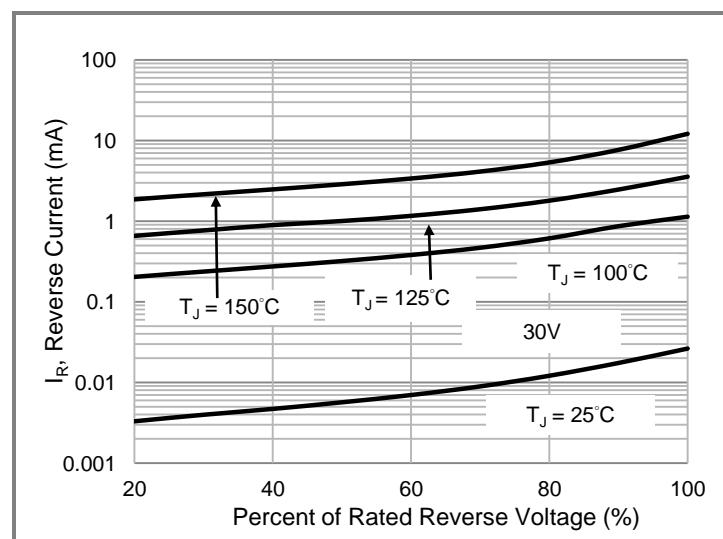


Fig.4 Typical Reverse Characteristics

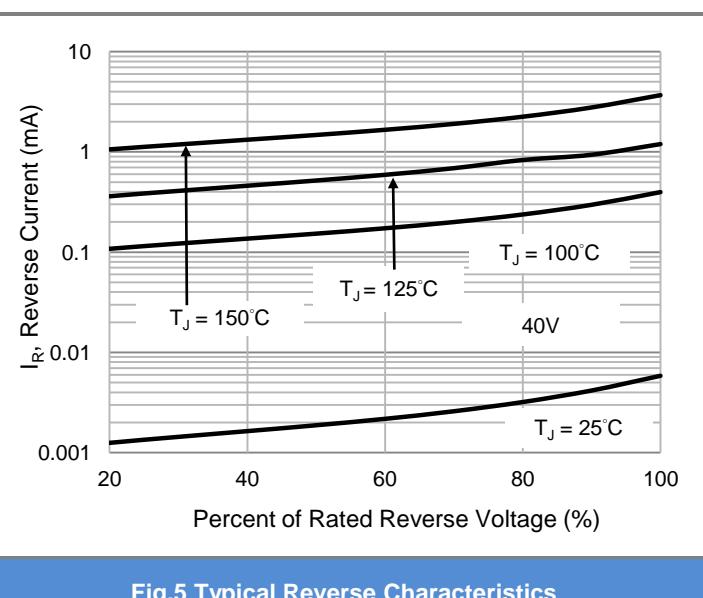


Fig.5 Typical Reverse Characteristics

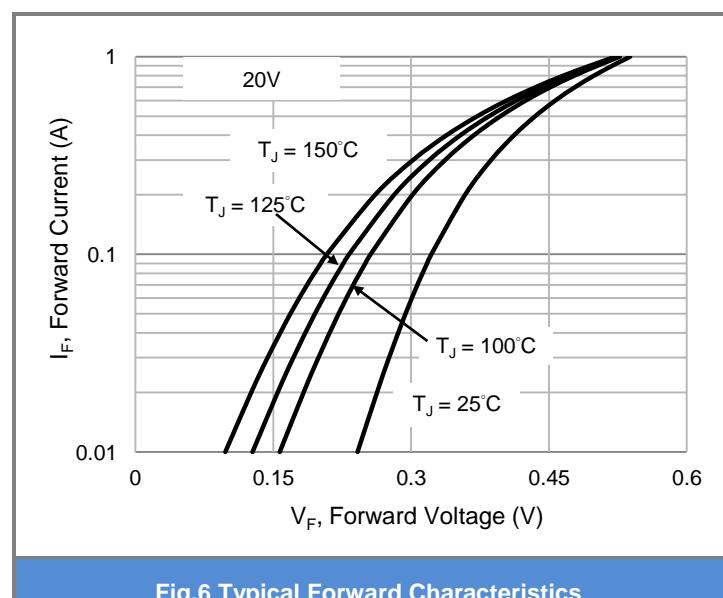


Fig.6 Typical Forward Characteristics



## SBA0820AS / SBA0830AS / SBA0840AS

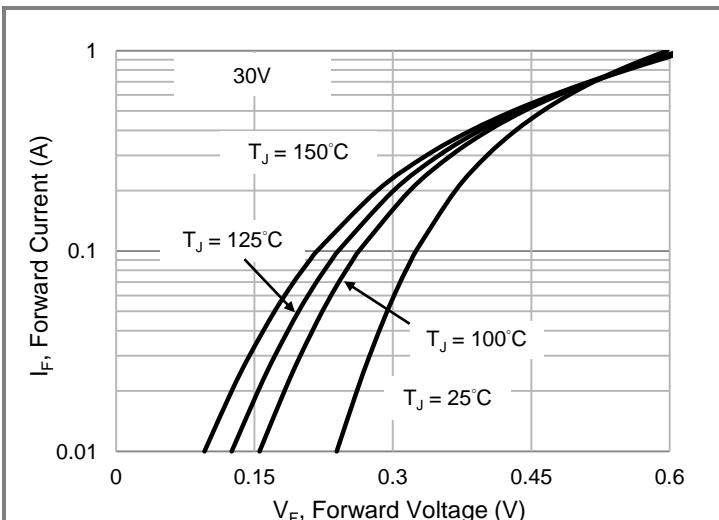


Fig.7 Typical Forward Characteristics

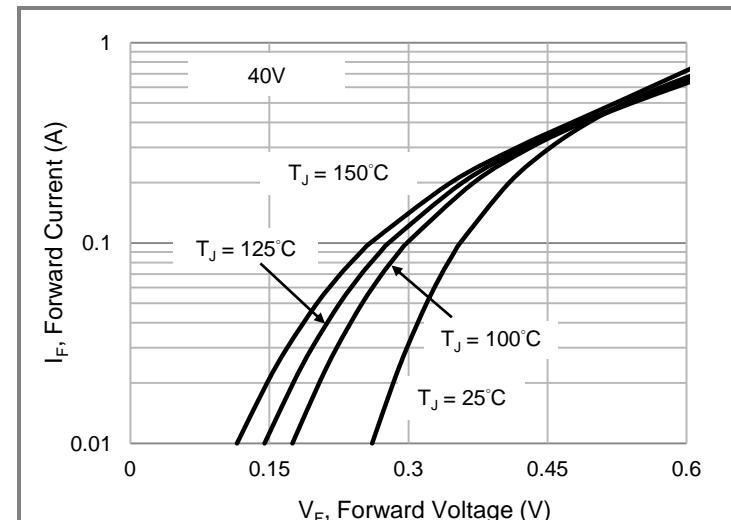


Fig.8 Typical Forward Characteristics

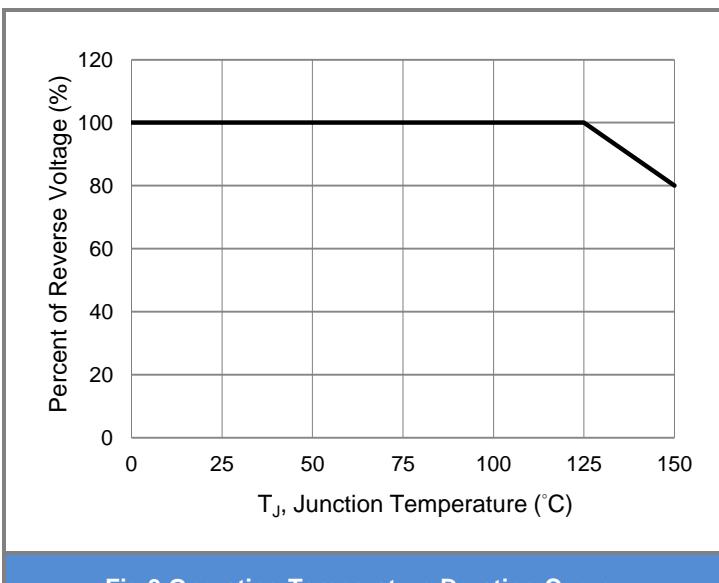


Fig.9 Operating Temperature Derating Curve



## SBA0820AS / SBA0830AS / SBA0840AS

### Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBA0820AS_R1_00001	SOD-123	3K pcs / 7" reel	2AS	Halogen free
SBA0830AS_R1_00001	SOD-123	3K pcs / 7" reel	3AS	Halogen free
SBA0840AS_R1_00001	SOD-123	3K pcs / 7" reel	4AS	Halogen free

### Packaging Information & Mounting Pad Layout

