



# SBA0820CS / SBA0830CS / SBA0840CS

## EXTREME LOW VF SCHOTTKY RECTIFIER

<b>Voltage</b>	<b>20-40 V</b>	<b>Current</b>	<b>0.8 A</b>
----------------	----------------	----------------	--------------

### Features


- Ultra low forward voltage, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Applications

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

### Mechanical Data

- Case: Molded plastic, SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00014 ounces, 0.0041 grams

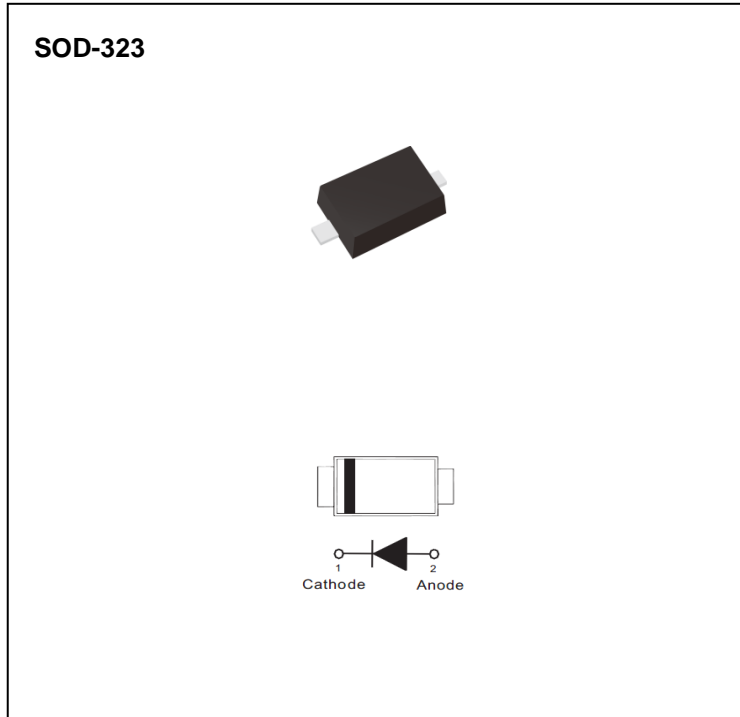

### Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	SBA0820CS	SBA0830CS	SBA0840CS	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V
Maximum rms voltage	$V_{RMS}$	14	21	28	V
Maximum dc blocking voltage	$V_R$	20	30	40	V
Maximum average forward rectified current	$I_{F(AV)}$	0.8			A
Peak forward surge current: 8.3ms single half sine-wave Superimposed on rated load	$I_{FSM}$	2			A
Typical thermal resistance	$R_{\theta JC}^{(2)}$	230			$^\circ\text{C/W}$
	$R_{\theta JA}^{(1)}$	650			
Operating junction temperature range	$T_J$	-55 to +150			$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150			$^\circ\text{C}$

### Electrical Characteristics

PARAMETER	SYMBOL	TEST CONDITION	SBA0820CS		SBA0830CS		SBA0840CS		UNIT
			TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	
Forward voltage	$V_F$	$I_F = 10\text{mA}$	0.24	-	0.25	-	0.26	-	V
		$I_F = 100\text{mA}$	0.32	-	0.33	-	0.35	-	
		$I_F = 800\text{mA}$	-	0.55	-	0.6	-	0.7	
		$T_J = 25^\circ\text{C}$							
Reverse current	$I_R^{(3)}$	$V_R = 10\text{V}$	0.13	-	0.13	-	0.15	-	V
		$V_R = 100\text{mA}$	0.23	-	0.24	-	0.29	-	
		$T_J = 25^\circ\text{C}$							
		$V_R = 40\text{V}$	4.6	-	4	-	1.3	-	$\mu\text{A}$
$V_R = 20\text{V}$	-	100	9	-	1.9	-			
$V_R = 30\text{V}$	-	-	-	100	3.1	-			
$V_R = 40\text{V}$	-	-	-	-	-	50			
		$V_R = 20\text{V}$	1.7	-	1.4	-	0.5	-	mA
		$V_R = 30\text{V}$	-	-	3.5	-	0.8	-	
		$T_J = 125^\circ\text{C}$							
		$V_R = 40\text{V}$	-	-	-	-	1.3	-	

- Note : 1. Mounted on a FR4 PCB, single-sided copper, mini pad.  
 2. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area.  
 3. Short duration pulse test used to minimize self-heating effect.



# SBA0820CS / SBA0830CS / SBA0840CS

## TYPICAL CHARACTERISTIC CURVES

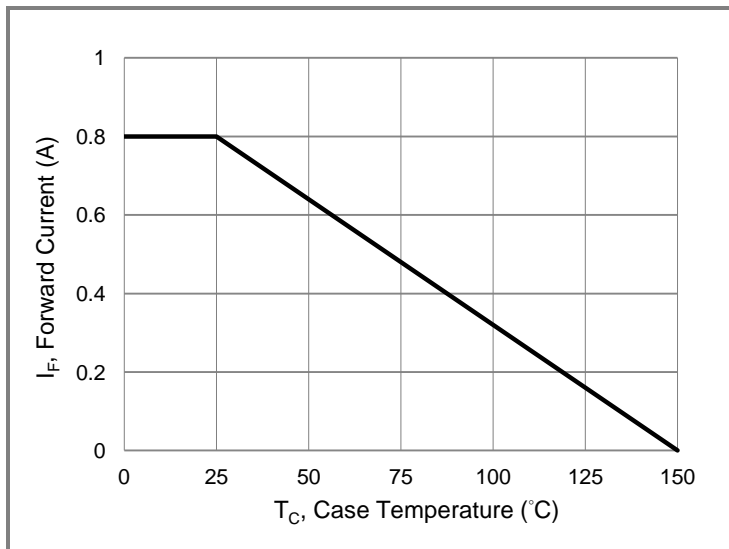


Fig.1 Forward Current Derating Curve

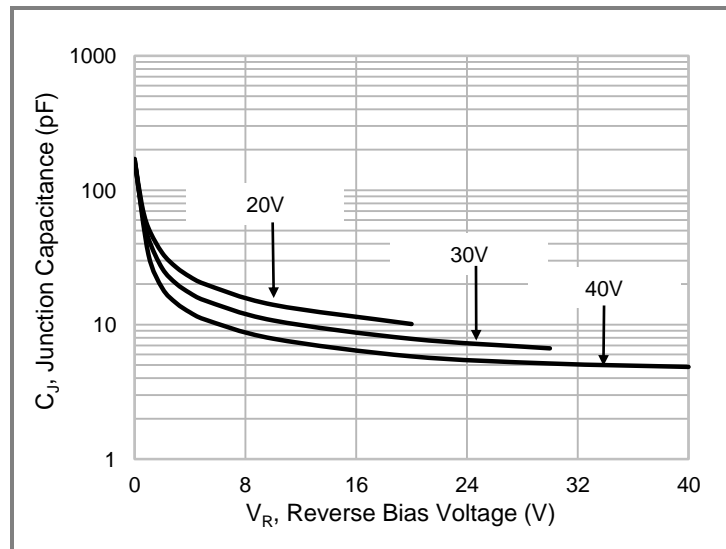


Fig. 2 Typical Junction Capacitance

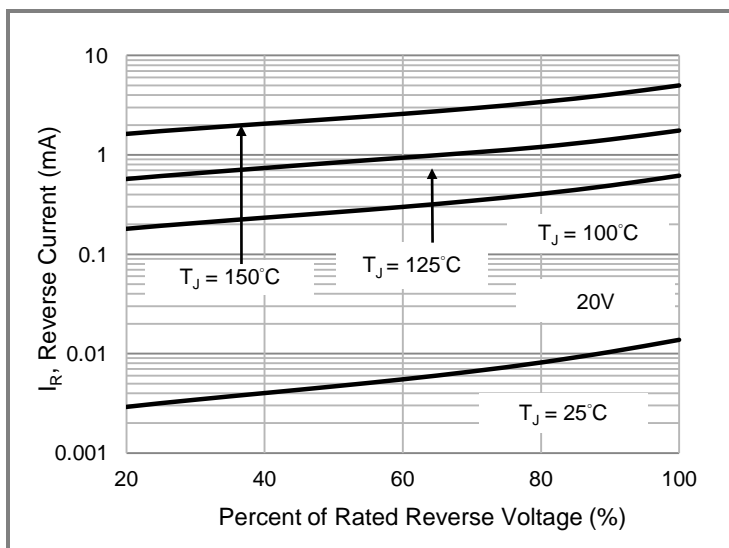


Fig.3 Typical Reverse Characteristics

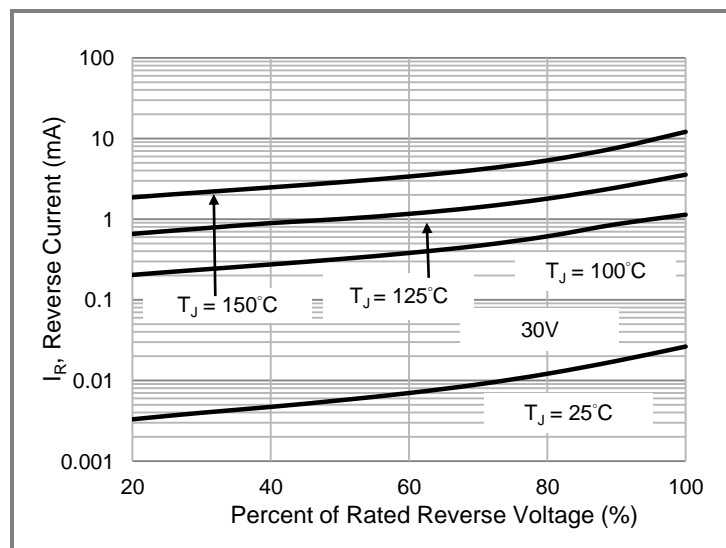


Fig.4 Typical Reverse Characteristics

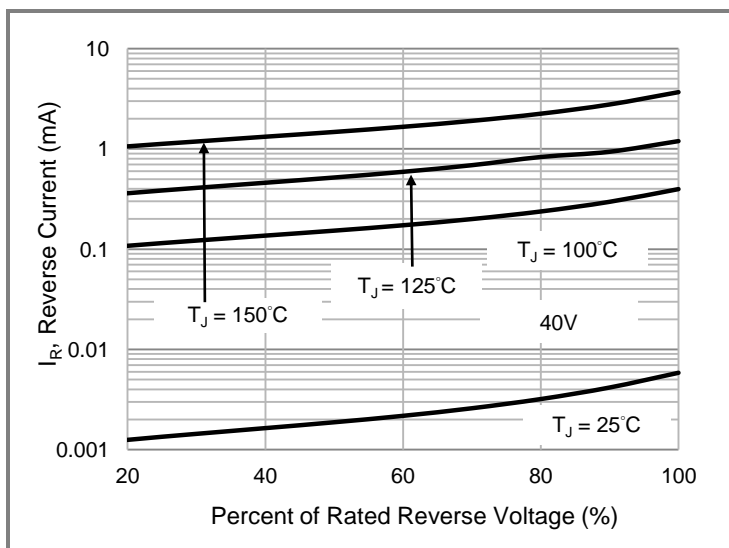


Fig.5 Typical Reverse Characteristics

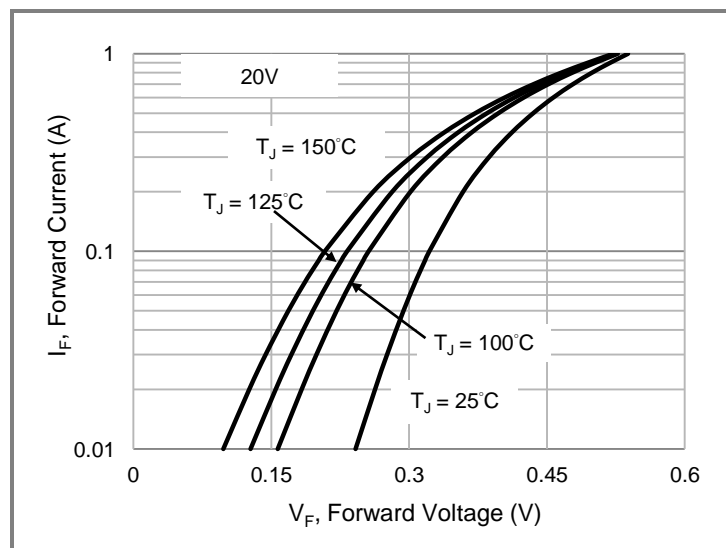


Fig.6 Typical Forward Characteristics



# SBA0820CS / SBA0830CS / SBA0840CS

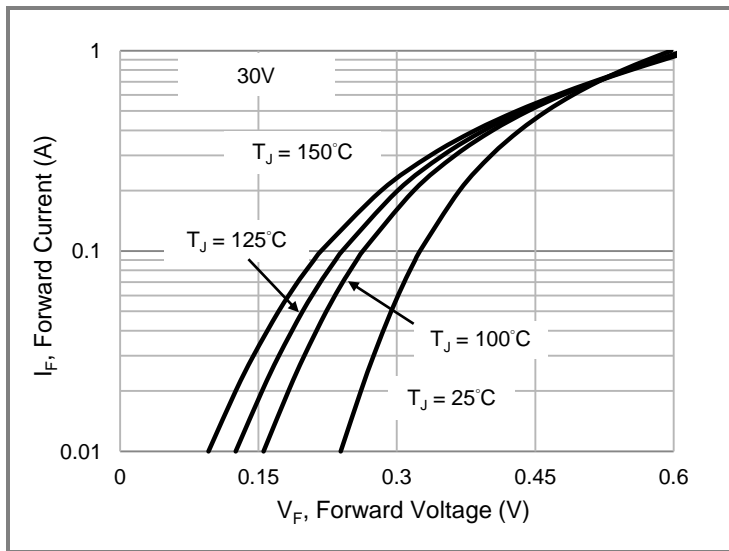


Fig.7 Typical Forward Characteristics

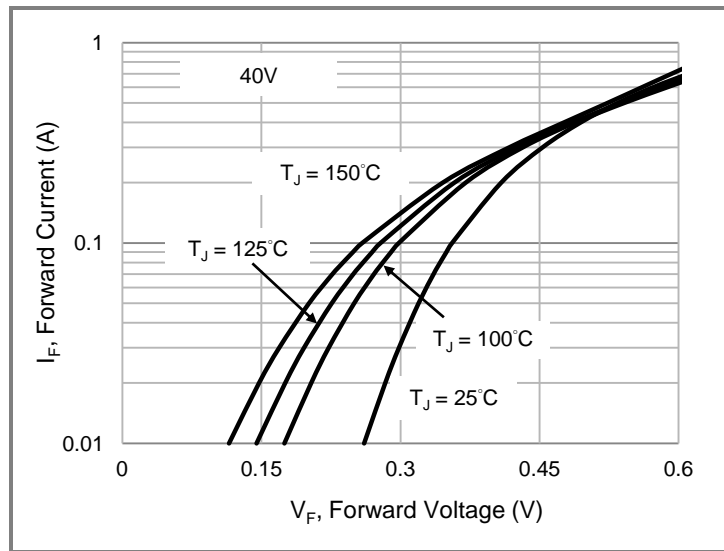


Fig.8 Typical Forward Characteristics

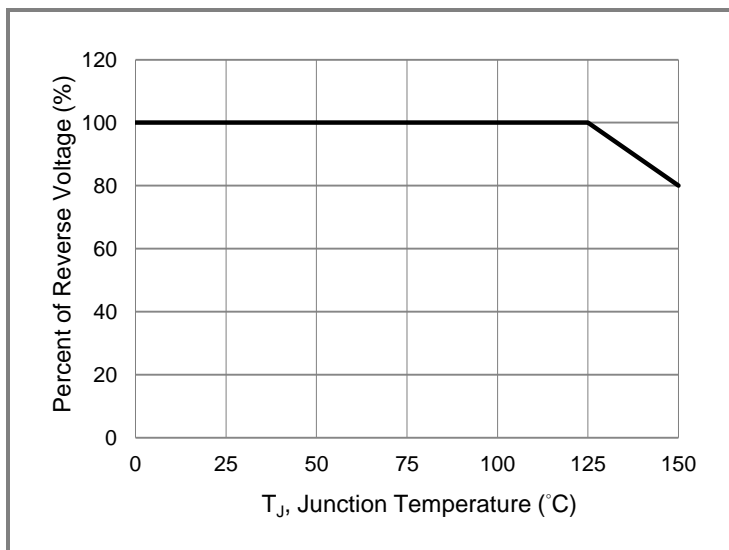


Fig.9 Operating Temperature Derating Curve



# SBA0820CS / SBA0830CS / SBA0840CS

## Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBA0820CS_R1_00001	SOD-323	5K / 7" Reel	2AS	Halogen free
SBA0830CS_R1_00001	SOD-323	5K / 7" Reel	3AS	Halogen free
SBA0840CS_R1_00001	SOD-323	5K / 7" Reel	4AS	Halogen free

## Packaging Information & Mounting Pad Layout

