



# SBA120CH / SBA130CH / SBA140CH

## EXTREME LOW VF SCHOTTKY RECTIFIER

<b>Voltage</b>	<b>20-40 V</b>	<b>Current</b>	<b>1 A</b>
----------------	----------------	----------------	------------

### Features

- Ultra low forward voltage drop, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard



### Applications

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

### Mechanical Data

- Case: Molded plastic, SOD-323HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0002 ounces, 0.005 grams

SOD-323HE



### Maximum Ratings ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	SBA120CH	SBA130CH	SBA140CH	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V
Maximum rms voltage	$V_{RMS}$	14	21	28	V
Maximum dc blocking voltage	$V_R$	20	30	40	V
Maximum average forward rectified current	$I_{F(AV)}$	1			A
Peak forward surge current : 8.3ms single half sine-wave Superimposed on rated load	$I_{FSM}$	10			A
Typical thermal resistance	$R_{\theta JC}^{(1)}$	50			$^\circ\text{C/W}$
	$R_{\theta JA}^{(2)}$	300			
Operating junction temperature range	$T_J$	-55 to +150			$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 to +150			$^\circ\text{C}$

### Electrical Characteristics

PARAMETER	SYMBOL	TEST CONDITION	SBA120CH		SBA130CH		SBA140CH		UNIT									
			TYP.	MAX.	TYP.	MAX.	TYP.	MAX.										
Forward voltage	$V_F$	$I_F = 10\text{mA}$	0.22	-	0.22	-	0.23	-	V									
		$I_F = 0.5\text{A}$								0.35	-	0.36	-	0.39				
		$I_F = 1\text{A}$													0.45	0.47	0.51	
		$T_J = 125^\circ\text{C}$	0.09	-	0.1	-	0.1	-		V								
Reverse current	$I_R^{(3)}$	$V_R = 10\text{V}$	7.5	-	5.9	-	3.6	-	$\mu\text{A}$									
		$V_R = 20\text{V}$								-	100	10	-	4.2				
		$V_R = 30\text{V}$													-	-	100	6.1
		$V_R = 40\text{V}$																
		$T_J = 125^\circ\text{C}$	3.2	-	2.2	-	1.2	-		mA								
		$V_R = 30\text{V}$	-	-	3.9	-	1.7	-										
		$V_R = 40\text{V}$	-	-	-	-	2.3	-										

Note : 1. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area.

2. Mounted on a FR4 PCB, single-sided copper, mini pad.

3. Short duration pulse test used to minimize self-heating effect.



# SBA120CH / SBA130CH / SBA140CH

## TYPICAL CHARACTERISTIC CURVES

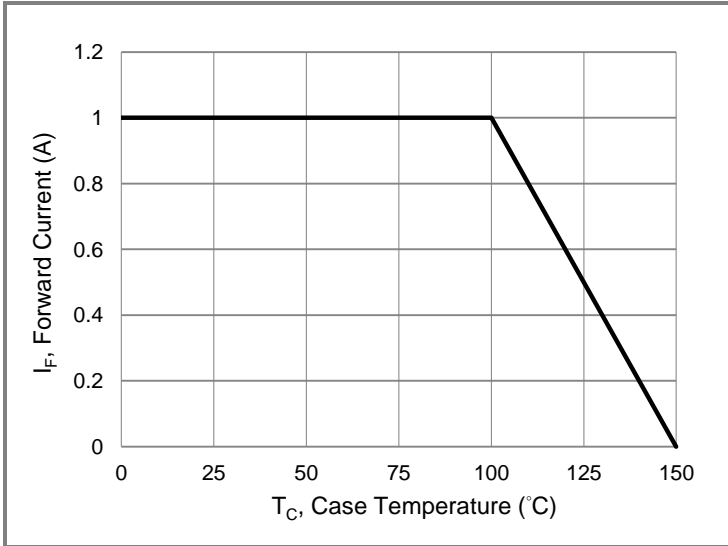


Fig.1 Forward Current Derating Curve

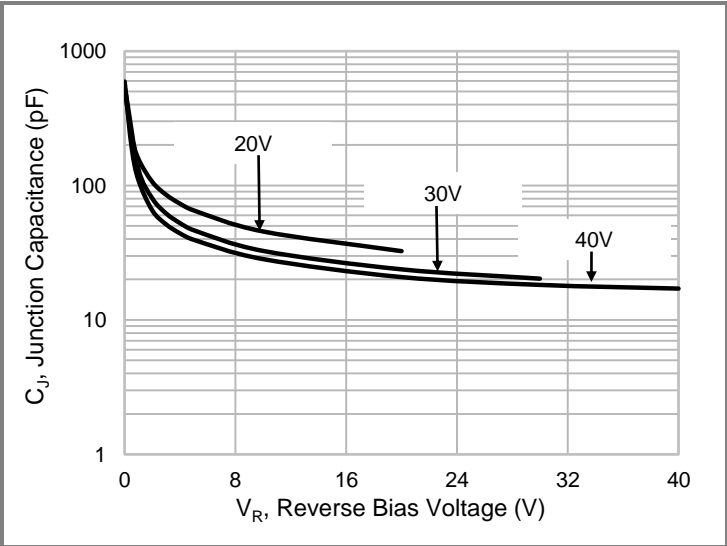


Fig. 2 Typical Junction Capacitance

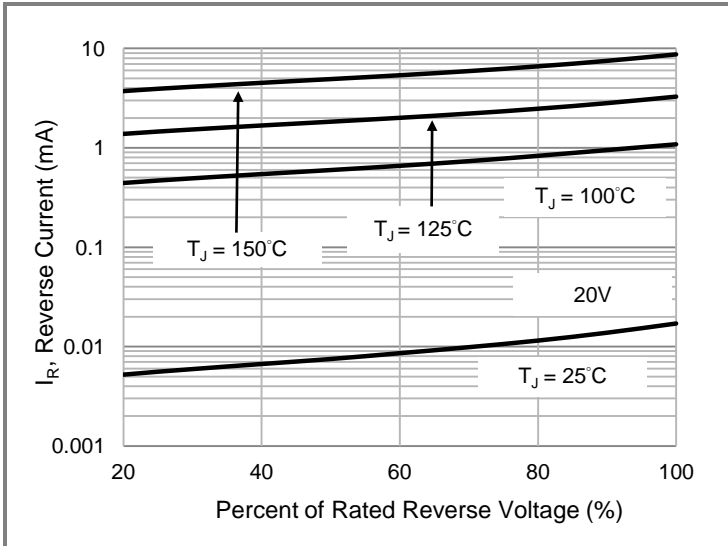


Fig.3 Typical Reverse Characteristics

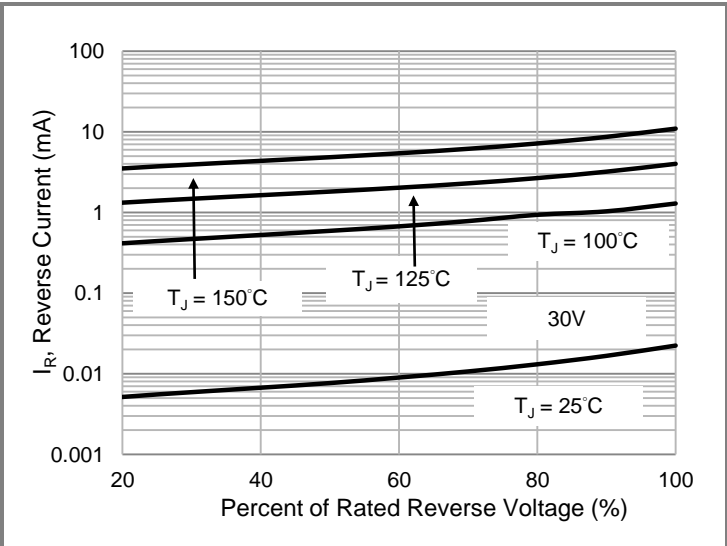


Fig.4 Typical Reverse Characteristics

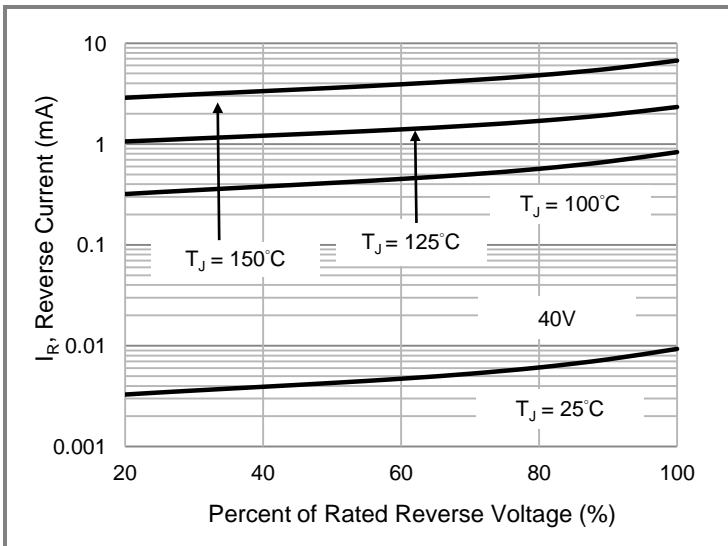


Fig.5 Typical Reverse Characteristics

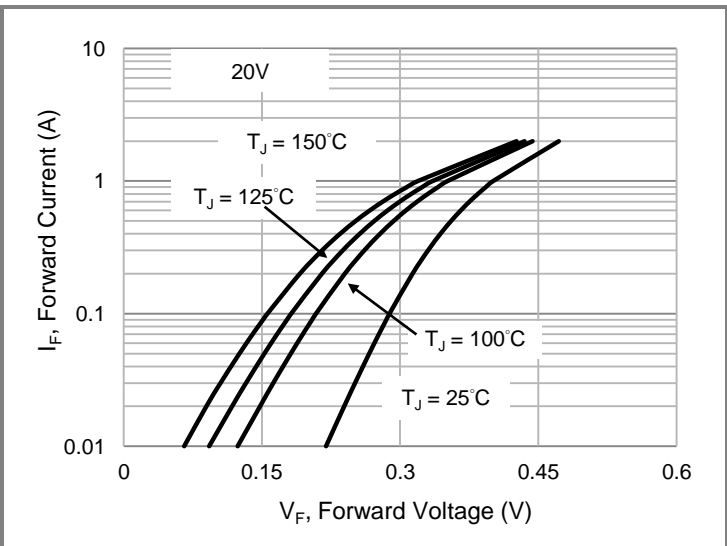


Fig.6 Typical Forward Characteristics



# SBA120CH / SBA130CH / SBA140CH

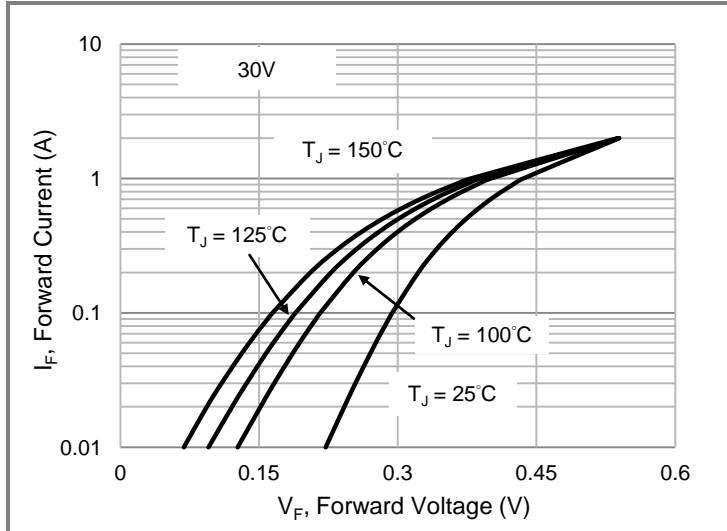


Fig.7 Typical Forward Characteristics

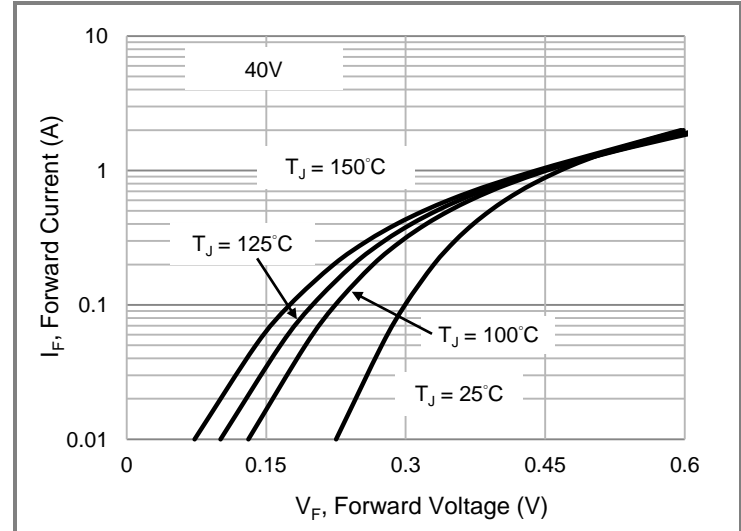


Fig.8 Typical Forward Characteristics

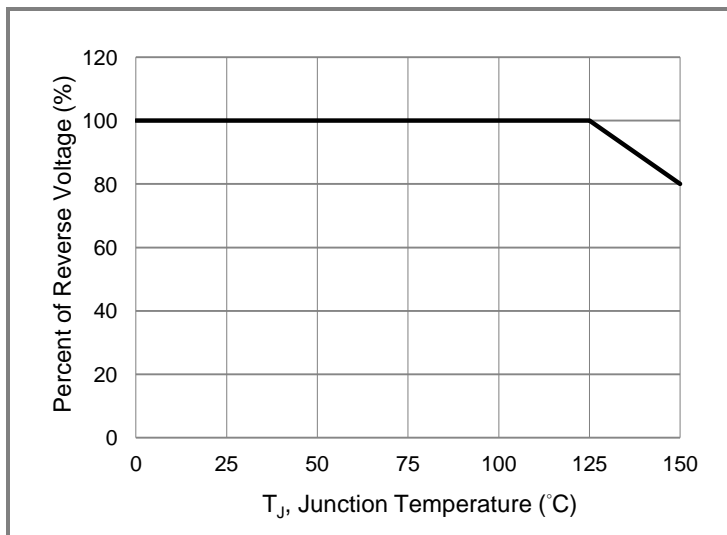


Fig.9 Operating Temperature Derating Curve



# SBA120CH / SBA130CH / SBA140CH

## Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBA120CH_R1_00001	SOD-323HE	5K pcs / 7" reel	B7	Halogen free
SBA130CH_R1_00001	SOD-323HE	5K pcs / 7" reel	A7	Halogen free
SBA140CH_R1_00001	SOD-323HE	5K pcs / 7" reel	C7	Halogen free

## Packaging Information & Mounting Pad Layout

