



SBA220CH / SBA230CH / SBA240CH

EXTREME LOW VF SCHOTTKY BARRIER RECTIFIER

| | | | |
|----------------|----------------|----------------|------------|
| Voltage | 20-40 V | Current | 2 A |
|----------------|----------------|----------------|------------|

Features

- Ultra low forward voltage drop, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard



Applications

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

Mechanical Data

- Case: Molded plastic, SOD-323HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0002 ounces, 0.005 grams

SOD-323HE



Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| PARAMETER | SYMBOL | SBA220CH | SBA230CH | SBA240CH | UNIT |
|--|-----------------------|-------------|----------|----------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 20 | 30 | 40 | V |
| Maximum rms voltage | V_{RMS} | 14 | 21 | 28 | V |
| Maximum dc blocking voltage | V_R | 20 | 30 | 40 | V |
| Maximum average forward rectified current | $I_{F(AV)}$ | 2 | | | A |
| Peak forward surge current: 8.3ms single half sine-wave Superimposed on rated load | I_{FSM} | 20 | | | A |
| Typical thermal resistance | $R_{\theta JC}^{(1)}$ | 50 | | | $^\circ\text{C/W}$ |
| | $R_{\theta JA}^{(2)}$ | 300 | | | |
| Operating junction temperature range | T_J | -55 to +150 | | | $^\circ\text{C}$ |
| Storage temperature range | T_{STG} | -55 to +150 | | | $^\circ\text{C}$ |

Electrical Characteristics

| PARAMETER | SYMBOL | TEST CONDITION | SBA220CH | | SBA230CH | | SBA240CH | | UNIT |
|--------------------|-------------|---------------------------|----------|------|----------|------|----------|------|---------------|
| | | | TYP. | MAX. | TYP. | MAX. | TYP. | MAX. | |
| Forward voltage | V_F | $I_F = 10\text{mA}$ | 0.21 | - | 0.21 | - | 0.22 | - | V |
| | | $I_F = 0.5\text{A}$ | 0.33 | - | 0.34 | - | 0.37 | - | |
| | | $I_F = 2\text{A}$ | - | 0.46 | - | 0.49 | - | 0.53 | |
| | | $T_J = 125^\circ\text{C}$ | 0.09 | - | 0.09 | - | 0.1 | - | V |
| Reverse current | $I_R^{(3)}$ | $V_R = 10\text{V}$ | 14 | - | 9 | - | 7.4 | - | μA |
| | | $V_R = 20\text{V}$ | - | 100 | 25 | - | 9.6 | - | |
| | | $V_R = 30\text{V}$ | - | - | - | 100 | 16 | - | |
| | | $V_R = 40\text{V}$ | - | - | - | - | - | 100 | |
| | | $T_J = 125^\circ\text{C}$ | 6.1 | - | 3.7 | - | 2.3 | - | mA |
| | | $V_R = 30\text{V}$ | - | - | 9.6 | - | 3.5 | - | |
| $V_R = 40\text{V}$ | - | - | - | - | 5.6 | - | | | |

Note : 1. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area.
 2. Mounted on a FR4 PCB, single-sided copper, mini pad.
 3. Short duration pulse test used to minimize self-heating effect.



SBA220CH / SBA230CH / SBA240CH

TYPICAL CHARACTERISTIC CURVES

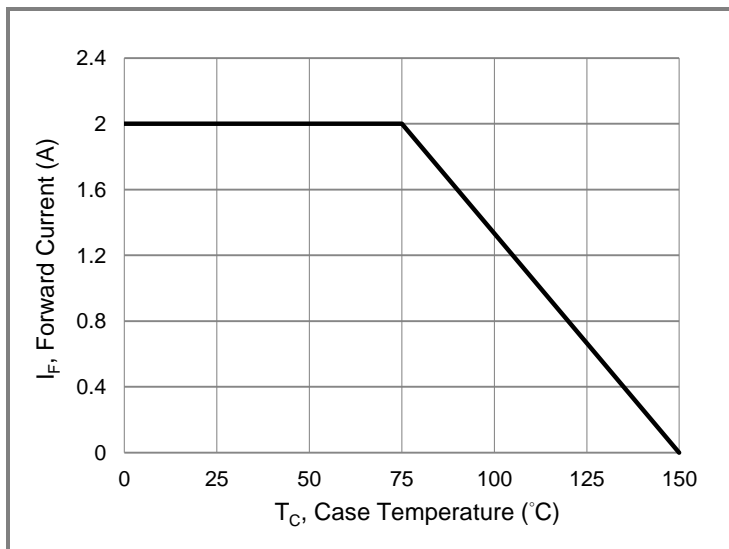


Fig.1 Forward Current Derating Curve

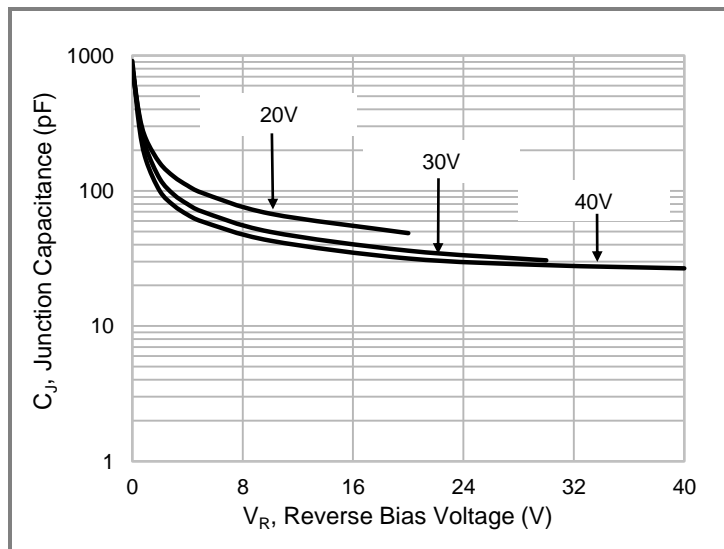


Fig. 2 Typical Junction Capacitance

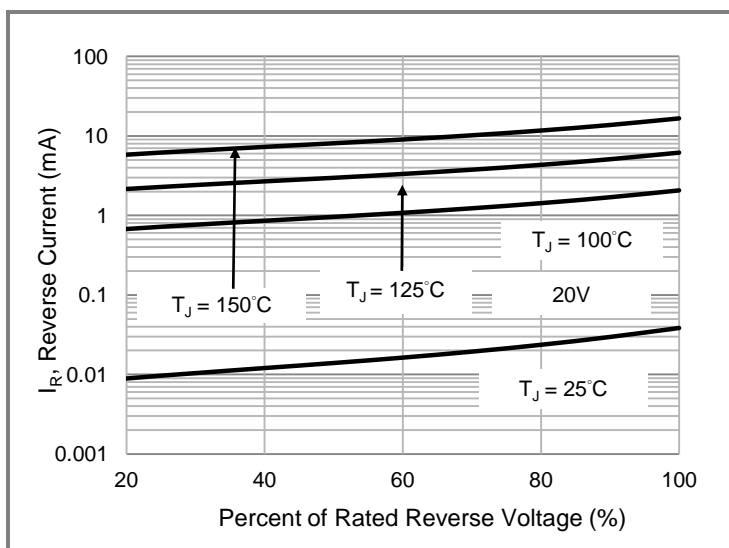


Fig.3 Typical Reverse Characteristics

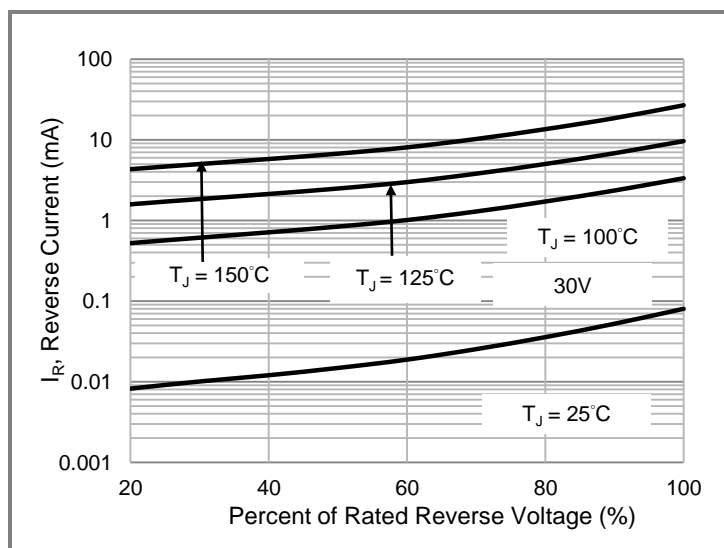


Fig.4 Typical Reverse Characteristics

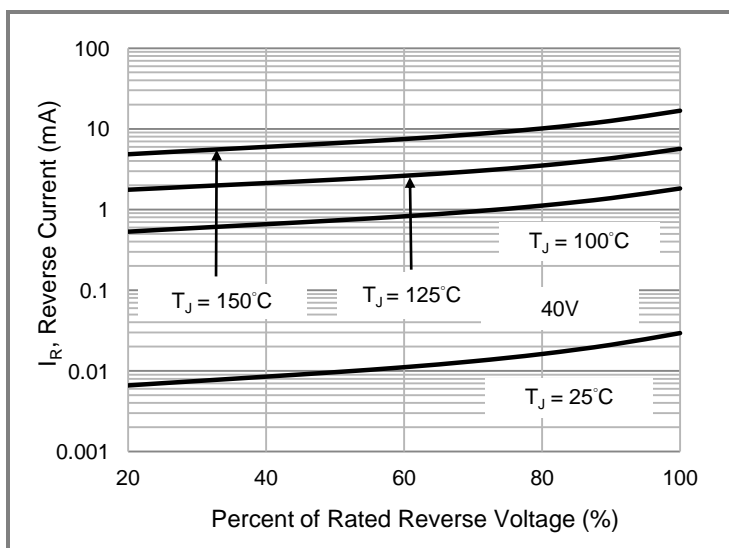


Fig.5 Typical Reverse Characteristics

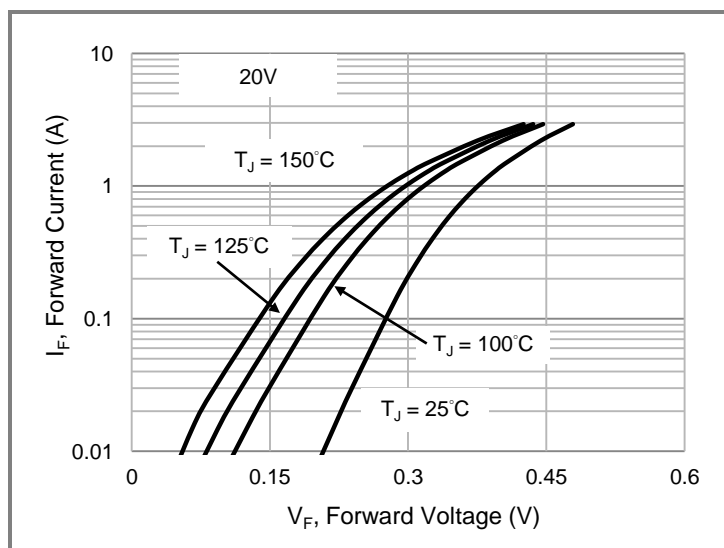


Fig.6 Typical Forward Characteristics



SBA220CH / SBA230CH / SBA240CH

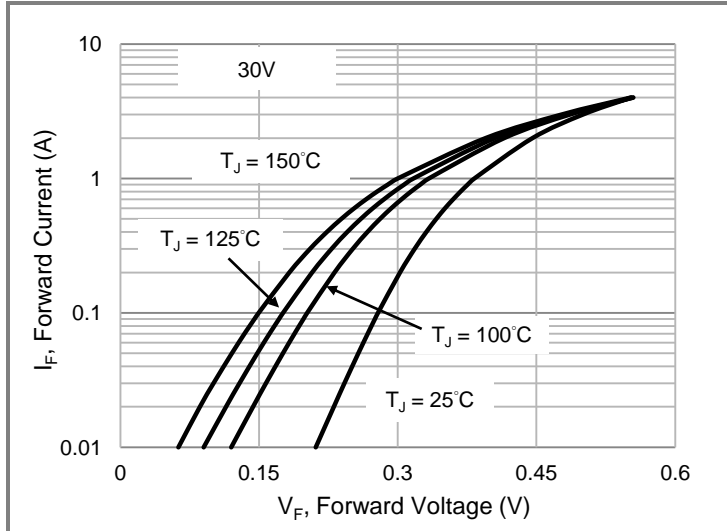


Fig.7 Typical Forward Characteristics

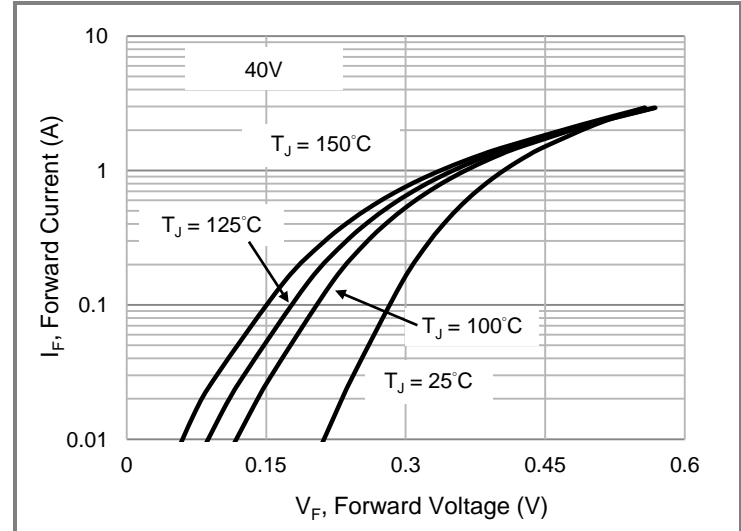


Fig.8 Typical Forward Characteristics

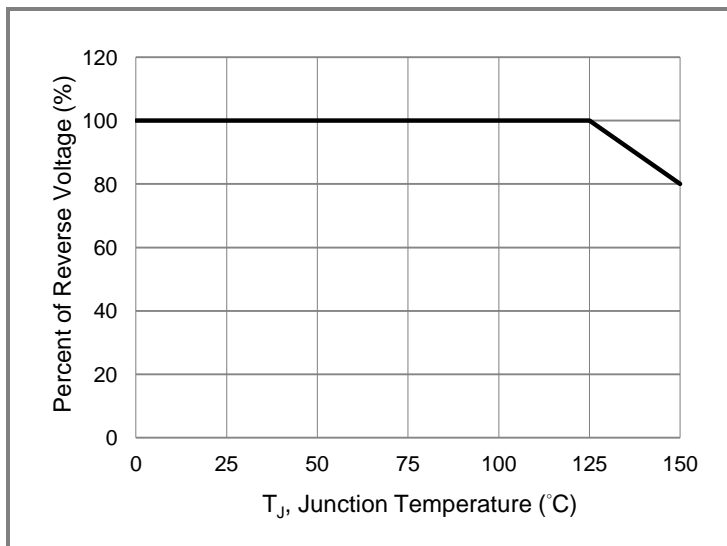


Fig.9 Operating Temperature Derating Curve



SBA220CH / SBA230CH / SBA240CH

Part No Packing Code Version

| Part No Packing Code | Package Type | Packing Type | Marking | Version |
|----------------------|--------------|------------------|---------|--------------|
| SBA220CH_R1_00001 | SOD-323HE | 5K pcs / 7" reel | E7 | Halogen free |
| SBA230CH_R1_00001 | SOD-323HE | 5K pcs / 7" reel | F7 | Halogen free |
| SBA240CH_R1_00001 | SOD-323HE | 5K pcs / 7" reel | H7 | Halogen free |

Packaging Information & Mounting Pad Layout

