



SBM36VAFC

Surface Mount Extreme Low Vf Schottky Barrier Rectifier

Voltage

60 V

Current

3 A


SMAF-C

Features

- Extreme low forward voltage drop
- Low power loss, high efficiency
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : SMAF-C plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0012 ounces, 0.034 grams



Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	60	V
Maximum RMS Voltage	V_{RMS}	42	V
Maximum DC Blocking Voltage	V_R	60	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3	A
Peak Forward Surge Current : 8.3 ms Single Half Sine-Wave Superimposed On Rated Load	I_{FSM}	80	A
Typical Junction Capacitance Measured at 1 MHz And Applied $V_R = 4V$	C_J	200	pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	150	$^\circ\text{C}/\text{W}$
	$R_{\theta JC}$	20	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$



SBM36VAFC

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	V_F	$I_F = 1 \text{ A}, T_J = 25^\circ\text{C}$	-	0.34	-	V
		$I_F = 3 \text{ A}, T_J = 25^\circ\text{C}$	-	0.45	0.5	
		$I_F = 1 \text{ A}, T_J = 125^\circ\text{C}$	-	0.27	-	
		$I_F = 3 \text{ A}, T_J = 125^\circ\text{C}$	-	0.43	-	
Reverse Current ^(Note 3)	I_R	$V_R = 48 \text{ V}, T_J = 25^\circ\text{C}$	-	35	-	uA
		$V_R = 60 \text{ V}, T_J = 25^\circ\text{C}$	-	-	220	
		$V_R = 60 \text{ V}, T_J = 125^\circ\text{C}$	-	10	-	mA

NOTES:

1. Mounted on a FR4 PCB, single-sided copper, standard footprint
2. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area
3. Short duration pulse test used to minimize self-heating effect



SBM36VAFC

TYPICAL CHARACTERISTIC CURVES

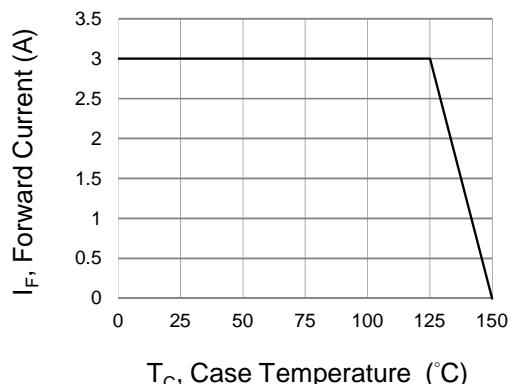


Fig.1 Forward Current Derating Curve

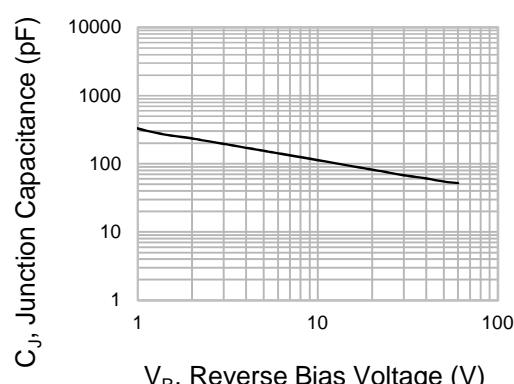


Fig.2 Typical Junction Capacitance

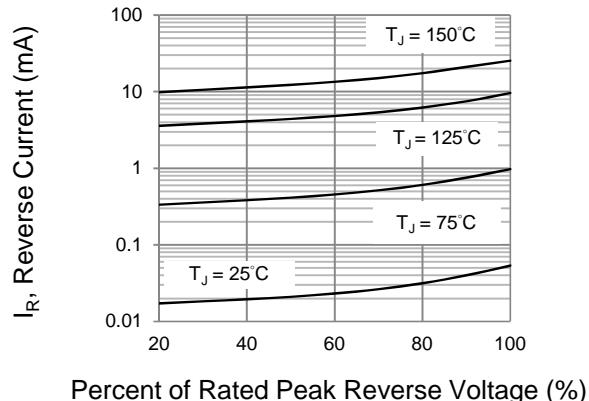


Fig.3 Typical Reverse Characteristics

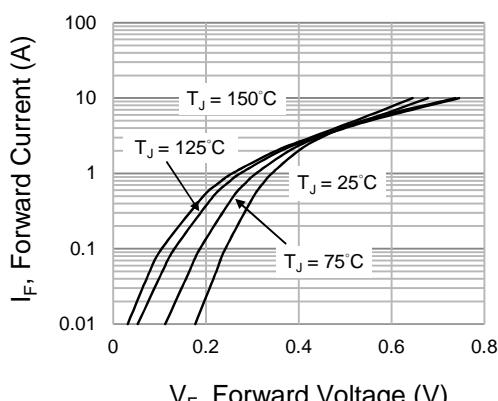


Fig.4 Typical Forward Characteristics

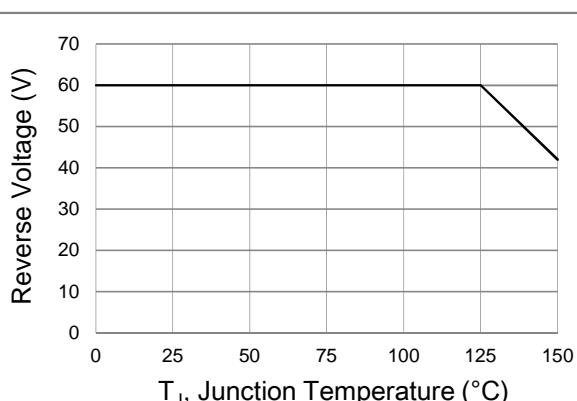


Fig.5 Operating Temperature Derating Curve



SBM36VAFC

Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
SBM36VAFC_R1_00001	SMAF-C	3K pcs / 7" reel	SBM36V	Halogen free

Packaging Information & Mounting Pad Layout

