



# Raspberry Pi 4 Computer Model B

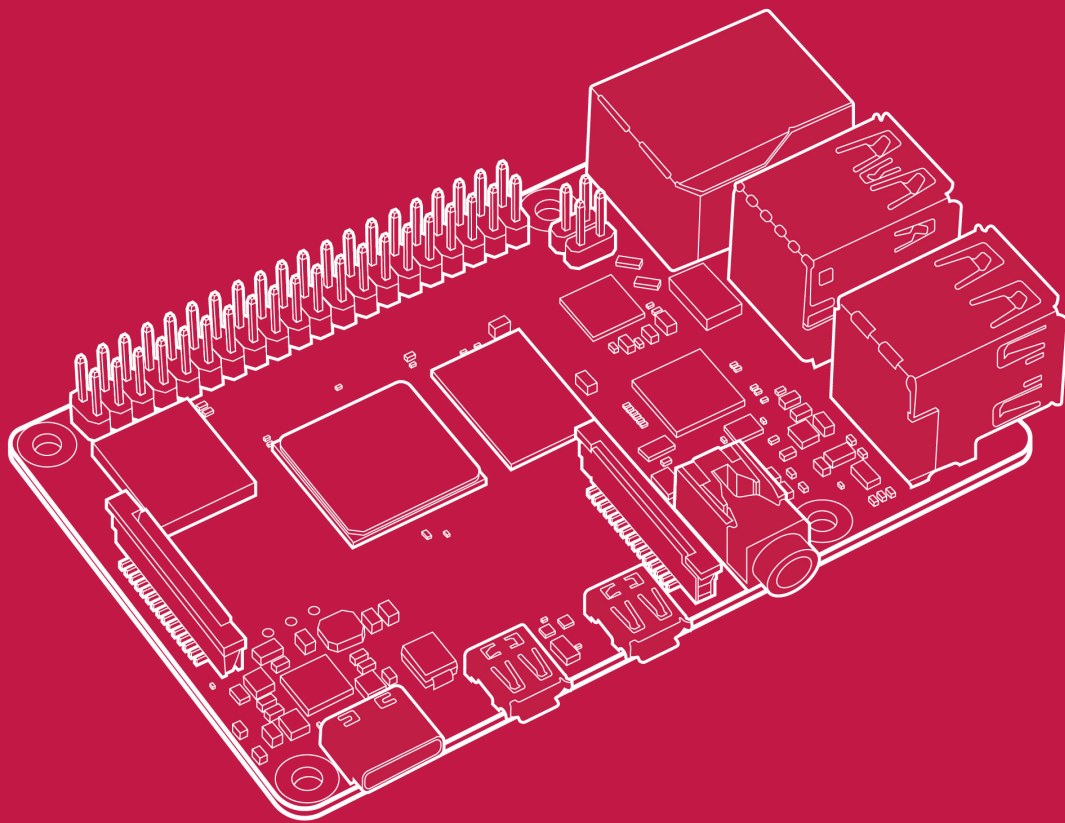


Published in June 2019  
by Raspberry Pi Trading Ltd.

[www.raspberrypi.org](http://www.raspberrypi.org)



Raspberry Pi

# Overview

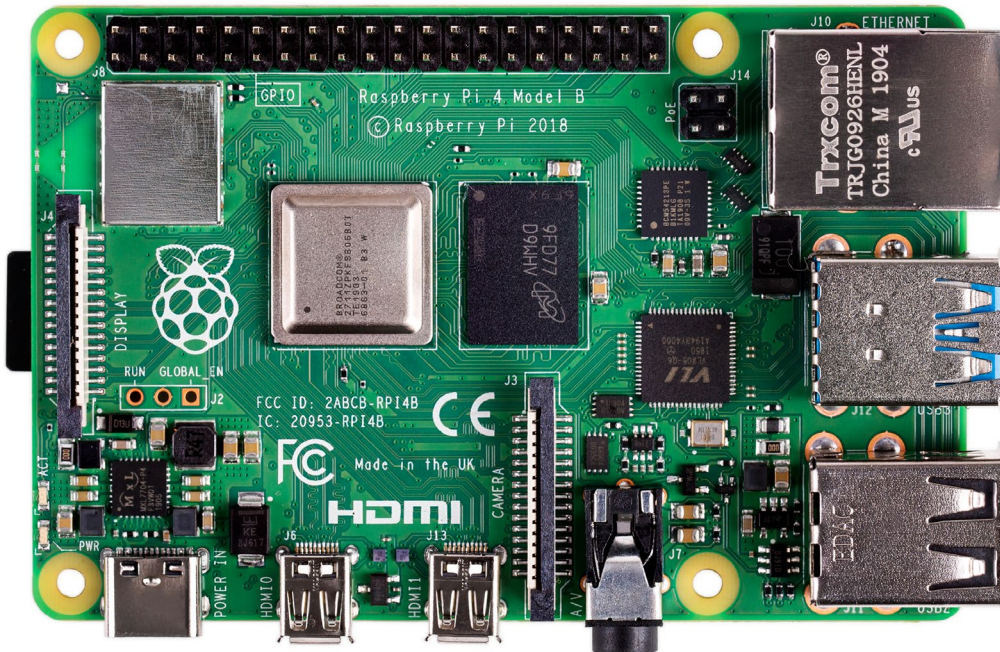

Raspberry Pi 4 Model B is the latest product in the popular Raspberry Pi range of computers. It offers ground-breaking increases in processor speed, multimedia performance, memory, and connectivity compared to the prior-generation Raspberry Pi 3 Model B+, while retaining backwards compatibility and similar power consumption. For the end user, Raspberry Pi 4 Model B provides desktop performance comparable to entry-level x86 PC systems.

This product's key features include a high-performance 64-bit quad-core processor, dual-display support at resolutions up to 4K via a pair of micro-HDMI ports, hardware video decode at up to 4Kp60, up to 4GB of RAM, dual-band 2.4/5.0 GHz wireless LAN, Bluetooth 5.0, Gigabit Ethernet, USB 3.0, and PoE capability (via a separate PoE HAT add-on).

The dual-band wireless LAN and Bluetooth have modular compliance certification, allowing the board to be designed into end products with significantly reduced compliance testing, improving both cost and time to market.

# Specification

<b>Processor:</b>	Broadcom BCM2711, quad-core Cortex-A72 (ARM v8) 64-bit SoC @ 1.5GHz
<b>Memory:</b>	1GB, 2GB or 4GB LPDDR4-2400 SDRAM (depending on model)
<b>Connectivity:</b>	2.4 GHz and 5.0 GHz IEEE 802.11b/g/n/ac wireless LAN, Bluetooth 5.0, BLE Gigabit Ethernet 2 × USB 3.0 ports 2 × USB 2.0 ports.
<b>GPIO:</b>	Standard 40-pin GPIO header (fully backwards-compatible with previous boards)
<b>Video &amp; sound:</b>	2 × micro HDMI ports (up to 4Kp60 supported) 2-lane MIPI DSI display port 2-lane MIPI CSI camera port 4-pole stereo audio and composite video port
<b>Multimedia:</b>	H.265 (4Kp60 decode); H.264 (1080p60 decode, 1080p30 encode); OpenGL ES, 3.0 graphics
<b>SD card support:</b>	Micro SD card slot for loading operating system and data storage
<b>Input power:</b>	5V DC via USB-C connector (minimum 3A <sup>1</sup> ) 5V DC via GPIO header (minimum 3A <sup>1</sup> ) Power over Ethernet (PoE)–enabled (requires separate PoE HAT)
<b>Environment:</b>	Operating temperature 0–50°C
<b>Compliance:</b>	For a full list of local and regional product approvals, please visit <a href="https://www.raspberrypi.org/documentation/hardware/raspberrypi/conformity.md">https://www.raspberrypi.org/documentation/hardware/raspberrypi/conformity.md</a>
<b>Production lifetime:</b>	The Raspberry Pi 4 Model B will remain in production until at least January 2026.





