



**Mallory Sonalert Products, Inc.**

Part #: **SCE016LD2VC3F**

# Sales Outline Drawing


Revision: **A**

## Specifications:

|                        |  |                             |                               |
|------------------------|--|-----------------------------|-------------------------------|
| Sound Level Category:  | Loud   | Medium                      | Soft                          |
| Mode of Operation:     | Medium Pulse   | Medium Pulse                | Medium Pulse                  |
| Pulse Rate (PPS):      | 5  | 5                           | 5                             |
| Loudness @ 2 FT:       | 85 to 95 dB(A) Typ.  | 75 to 85 dB(A) Typ.         | 65 to 75 dB(A) Typ.           |
| Frequency:             | 2000 ± 500 Hz  | 2000 ± 500 Hz               | 2000 ± 500 Hz                 |
| Connection:            | TERMINALS ONLY   | TERMINALS; BLUE WIRE TO (-) | TERMINALS; YELLOW WIRE TO (-) |
| Voltage Rating:        | 6 to 16 VDC  |                             |                               |
| Current Draw:          | 40mA MAX   |                             |                               |
| Housing Material:      | 6/6 Nylon, Color: Black  |                             |                               |
| Storage Temperature:   | -40° to +85° C   |                             |                               |
| Operating Temperature: | -40° to +85° C   |                             |                               |
| Panel Mounting:        | Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole. |                             |                               |
| Knurled Nut:           | Used to attach part to panel. The max recommended torque is 10 in-lbs.                     |                             |                               |
| Weight (Typical):      | 2.1 oz (60g)   |                             |                               |
| NEMA 3R,4X, & 12:      | Approved with use of ACC03.  |                             |                               |
| cUL Recognition:       | cUL Recognized   |                             |                               |
| Options:               | Please contact factory.  |                             |                               |

## Dimensions: Inches (mm)

**ROHS Compliant**

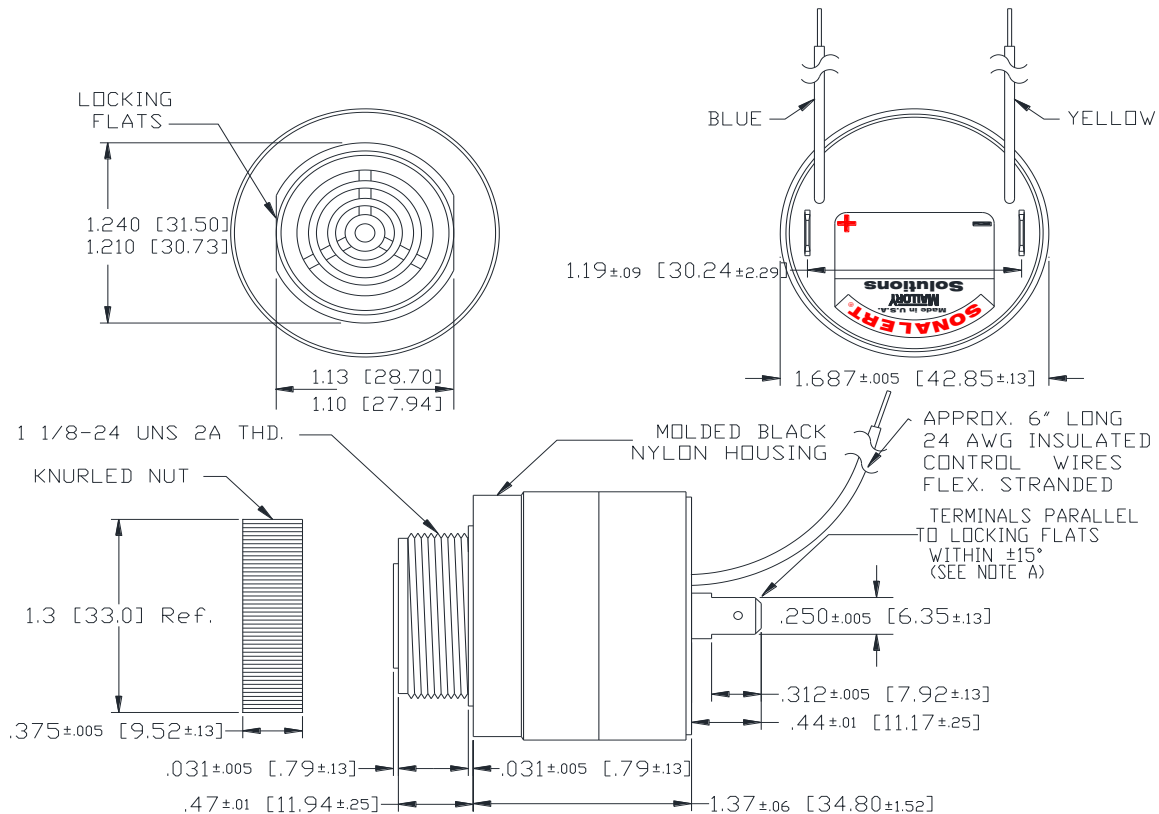

MOUNTING: REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.