

# Signal Chain Power 5 × 1 Integration Board

## DESCRIPTION

Demonstration circuit SCP-5X1-EVALZ is a companion hardware tool designed to integrate several voltage rails into a compact, single point terminal in a Signal Chain Power hardware evaluation matrix. It features five input ports and one output port, along with passive filtering options.

Like all boards in the Signal Chain Power series, this board is designed to be easily plugged into other SCP boards to form a complete signal chain power system, enabling fast evaluation of low power signal chains. To evaluate this board, some universal SCP hardware is required, namely:

- SCP-INPUT-EVALZ                SCP-FILTER-EVALZ
- SCP-OUTPUT-EVALZ            SCP-1X2BKOUT-EVALZ
- SCP-1X5BKOUT-EVALZ        SCP-THRUBRD-EVALZ

To properly evaluate SCP series demo boards, you will need the SCP Configurator companion software. SCP Configurator can help you choose the right board and topology for your design.


**Design files for this circuit board are available.**

All registered trademarks and trademarks are property of their respective owners

**Table 1. Performance Summary**

SYMBOL	PARAMETER	NOTES	MIN	TYP	MAX	UNITS
V <sub>IN(MAX)</sub>	Max Input Voltage				50	V
V <sub>OUT(MAX)</sub>	Max Output Voltage				50	V
I <sub>OUT(MAX)</sub>	Max Output Current				2	A
I <sub>LED(MAX)</sub>	Max Indicator LED Current	See Configuration Section			30	mA

## BOARD IMAGE

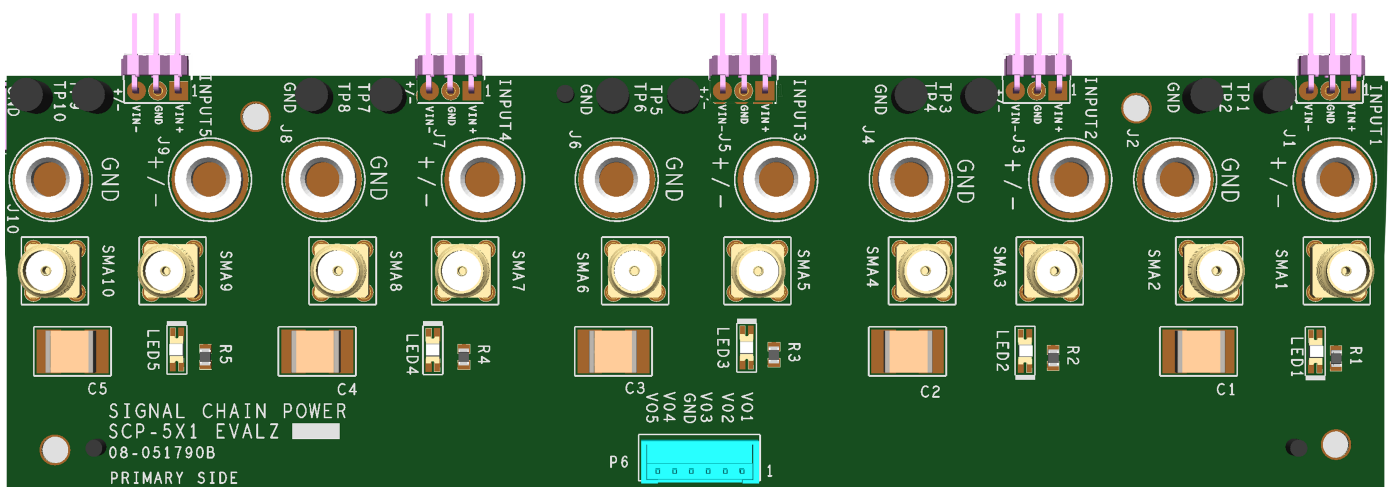

**Figure 1. Signal Chain Power 5 × 1 Integration Board**

# DEMO MANUAL SCP-5X1-EVALZ

## QUICK START PROCEDURE

Demonstration circuit SCP-5X1-EVALZ is easy to set up to evaluate the performance of any SCP hardware configuration. Refer to Figure 2 and follow these steps:

1. The SCP-5X1-EVALZ ships with a bi-directional LED to indicate applied voltage. To set the limiting resistor, see “Configuration Settings” section, and modify the board accordingly. Be sure to check for open connections or solder shorts after making any modifications.
2. Connect the SCP-INPUT-EVALZ and SCP-OUTPUT-EVALZ boards to the SCP board under evaluation (refer to Figure 1) and connect the input board to a voltage source,  $V_{SOURCE}$ . Connect the output board to a voltmeter or dynamic load. Slowly raise the input voltage until the SCP-5X1-EVALZ powers up the device under test into regulation and sweep  $V_{SOURCE}$  through the desired range of operation.

NOTE: Make sure that the input voltage is always within spec. If using a dynamic load to measure output voltage, make sure the load is initially set to zero.

3. Check for proper output voltages. The output should be regulated at the programmed value ( $\pm 5\%$ ).
4. Once the proper output voltage is established, power off  $V_{SOURCE}$  and similarly test other boards in the SCP system until all elements have been individually verified prior to assembling into the final circuit configuration.

NOTE: When measuring the input or output voltage ripple, use the optional SMA connector locations available on the input, output, 1  $\times$  5, 1  $\times$  2, and 5  $\times$  1 breakout boards. Avoid using the test point connections with long scope leads.

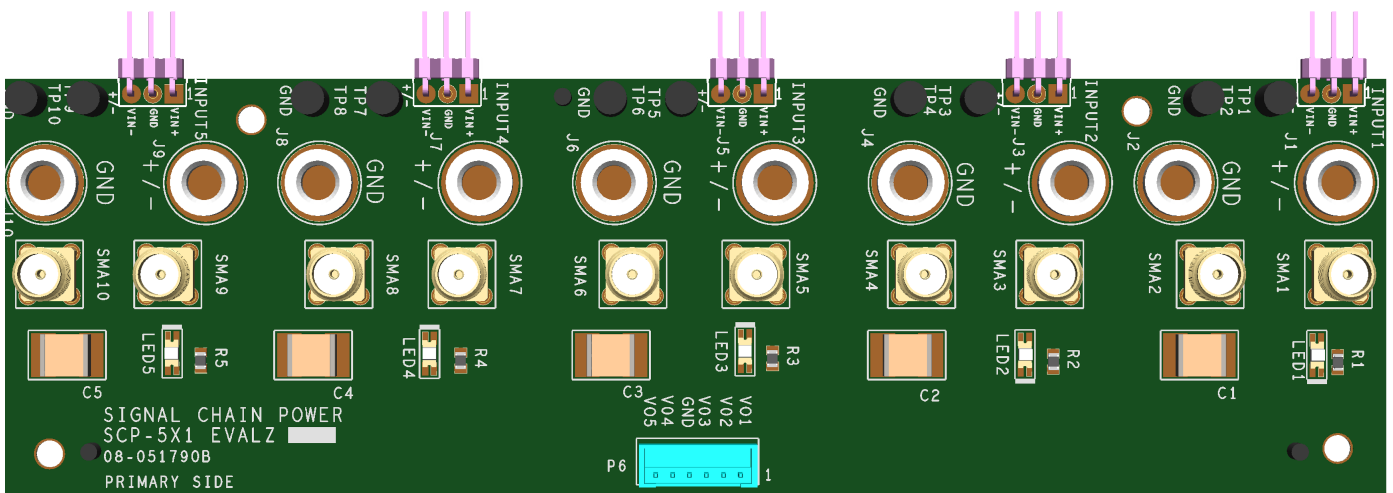


Figure 2. Proper Measurement Equipment Setup (Use SMA connectors for Measuring Input or Output Ripple)

## CONFIGURATION SETTINGS

Demonstration circuit SCP-5X1-EVALZ is a companion hardware tool designed to integrate several voltage rails into a compact, single point terminal in a Signal Chain Power hardware evaluation matrix. It features five (5) input ports and one (1) output port, along with passive filtering options.

### INDICATOR LED CURRENT

$$I_{LED} = \frac{V_{IN} - [2.00V_{MIN}; 2.40V_{MAX}]}{R_{n=1 \rightarrow 5}}$$

Table 2. LED Current-Limiting Resistor Selection Table

V <sub>IN</sub> (V)	R1, R2, R3, R4, R5 (Ω)	V <sub>IN</sub> (V)	R1, R2, R3, R4, R5 (Ω)
2.5	24.9	23.0	1.05k
3.0	49.9	24.0	1.10k
3.3	9	25.0	1.15k
3.5	75	26.0	1.21k
4.0	100	27.0	1.24k
4.5	124	28.0	1.30k
5.0	150	29.0	1.33k
5.5	174	30.0	1.40k
6.0	200	31.0	1.43k
6.5	226	32.0	1.50k
7.0	249	33.0	1.54k
7.5	274	34.0	1.58k
8.0	301	35.0	1.65k
8.5	324	36.0	1.69k
9.0	348	37.0	1.74k
9.5	374	38.0	1.78k
10.0	402	39.0	1.87k
11.0	453	40.0	1.91k
12.0	499	41.0	1.96k
13.0	549	42.0	2.00k
14.0	604	43.0	2.05k
15.0	649	44.0	2.10k
16.0	698	45.0	2.15k
17.0	750	46.0	2.21k
18.0	806	47.0	2.26k
19.0	845	48.0	2.32k
20.0	909	49.0	2.37k
21.0	953	50.0V	2.43k
22.0	1.00k		

### OUTPUT CONNECTOR CONFIGURATION

Output connector P6 allows a single-point harness connection or PCB attachment to the integration board.

For harness attachment, use the Hirose Electric Co. part DF3-6S-2C with crimp pin DF3-2428SCC.

For attaching integration board to your system board, include part DF3-6S-2DSA (25) in design CAD library.

Please reference the schematic page included in this appendix for the pinout connectivity of connector P6.

### SIGNAL MEASUREMENT CONFIGURATION

Each channel has two (2) dedicated vertical SMA output connectors for easy connection to test or measurement equipment. Additionally, the banana jacks are spaced at 0.750" for use with BNC (female) to double stacking banana plug type adapters (Pomona model 1269 or equivalent).

# DEMO MANUAL SCP-5X1-EVALZ

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
1	1	PCB	PCB	ANALOG DEVICES 08_051790b
2	5	C1, C2, C3, C4, C5	CAP MLCC 2220 (Note 1)	N/A
3	5	INPUT1, INPUT2, INPUT3, INPUT4, INPUT5	CONN MALE 3POS 2.54MM PITCH R/A	SULLINS PBC03SBAN
4	10	J1, J2, J3, J4, J5, J6, J7, J8, J9, J10	CONN-PCB BANANA JACK	KEYSTONE ELECTRONICS 575-4
5	5	LED1, LED2, LED3, LED4, LED5	LED BI-COLOR GREEN	LITE-ON TECHNOLOGY LTST-C235KGKTKT
6	1	P6	CONN 6POS MALE SHROUDED, 2MM PITCH	HIROSE ELECTRIC CO. DF3A-6P-2DSA
7	5	R1, R2, R3, R4, R5	RES THICK FILM 0805 (Note 1)	N/A
8	5	SMA1, SMA3, SMA5, SMA7, SMA9	CONN-PCB STRAIGHT SMA PCB DIE CAST (Note 1)	TE CONNECTIVITY LTD 5-1814832-1
9	5	SMA2, SMA4, SMA6, SMA8, SMA10	CONN-PCB STRAIGHT SMA PCB DIE CAST	TE CONNECTIVITY LTD 5-1814832-1
10	5	TP1, TP3, TP5, TP7, TP9	CONN-PCB TEST POINT RED	KEYSTONE ELECTRONICS 5010
11	5	TP2, TP4, TP6, TP8, TP10	CONN-PCB TEST POINT BLACK	KEYSTONE ELECTRONICS 5011

**Note 1.** These items are not stuffed (DNI).

## SCHEMATIC DIAGRAM

