

DC Pass

# Power Splitter/Combiner

SEPS-2-63+

2 Way-0° 50Ω 680 to 6000 MHz

## The Big Deal

- >3 octave bandwidth, 680 to 6000 MHz
- Low insertion loss, 1.0 dB
- Small size, 1.25 x 1.0 x 0.2"



CASE STYLE: JF1258

## Product Overview

Mini-Circuits' SEPS-2-63+ is a 50Ω 2-way 0° surface mount splitter/combiner covering the 680 to 6000 MHz frequency range, supporting a wide variety of applications. This model can handle up to 5W RF input power as a splitter and provides low insertion loss, low phase and amplitude unbalance, and good isolation. Housed in a miniature, shielded package (1.25 x 1.0 x 0.2") with wrap-around terminations this unit interfaces with gold over nickel plate termination finish.

## Key Features

Feature	Advantages
Wideband, 680 to 6000 MHz	>3 octave bandwidth supports a wide range of broadband applications.
Low insertion loss, 1.0 dB	The combination of 5W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining signal power.
Low unbalance: <ul style="list-style-type: none"><li>• 0.2 dB amplitude unbalance</li><li>• 1.5° phase unbalance</li></ul>	SEPS-2-63+ produces nearly equal output signals, ideal for parallel path / multichannel systems.
Good isolation, 22 dB	Minimizes interference between input ports.
Good output matching VSWR, 1.3:1 typ.	Provides excellent thru-path transmission with low signal reflection.
Small size, 1.25 x 1.0 x 0.2"	Saves space in crowded PCB layouts.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Power Splitter/Combiner

SEPS-2-63+

2 Way-0° 50Ω 680 to 6000 MHz

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	5W max.
Internal Dissipation	0.4W max.
DC Current	1.5A (750 mA for each port)

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

SUM PORT	17
PORT 1	4
PORT 2	8
GROUND	all others


## Outline Drawing

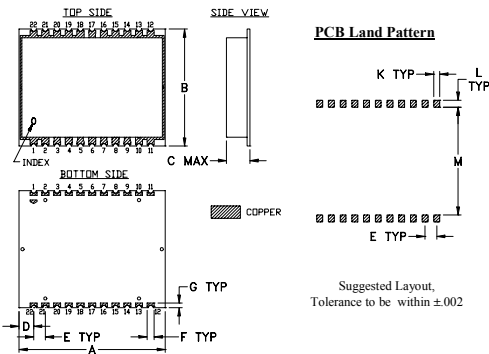

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.250	1.000	.200	.125	.100	.060	.040
31.75	25.40	5.08	3.18	2.54	1.52	1.02
H	J	K	L	M		wt
--	--	.050	.060	.920		grams
--	--	1.27	1.52	23.37		4.4

## Demo Board MCL P/N: TB-760+ Suggested PCB Layout (PL-402)

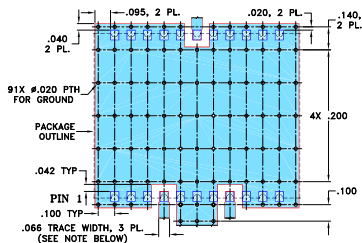

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- wideband 680-6000 MHz
- good output matching, VSWR 1.3 typ.
- excellent amplitude unbalance, 0.2 dB typ.

## Applications

- SATCOM
- broadband wireless
- test and measurement
- wireless telecom



Generic photo used for illustration purposes only

CASE STYLE: JF1258

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		680		6000	MHz
Insertion Loss Above 3.0 dB	680 - 1200	—	0.6	1.0	dB
	1200 - 5000	—	0.8	1.5	
Isolation	5000 - 6000	—	1.0	2.5	dB
	680 - 1200	10	17.0	—	
Phase Unbalance	1200 - 6000	—	1.5	5.0	Degree
	680 - 1200	—	0.3	2.0	
Amplitude Unbalance	1200 - 6000	—	0.2	0.6	dB
	680 - 1200	—	0.1	0.4	
VSWR (Port S)	1200 - 6000	—	1.5	1.82	:1
	680 - 1200	—	1.6	2.0	
VSWR (Port 1-2)	680 - 6000	—	1.3	1.6	:1

## Electrical Schematic

