

# SF10KC60M

## Fast Recovery Diodes

600V, 10A

### Feature

- Full Molded
- High Voltage
- Low Noise
- Dielectric Strength 2kV
- Pb free terminal
- RoHS:Yes


### OUTLINE

Package (House Name): FTO-220AG

Package (JEITA Code): SC-91



### Equivalent circuit

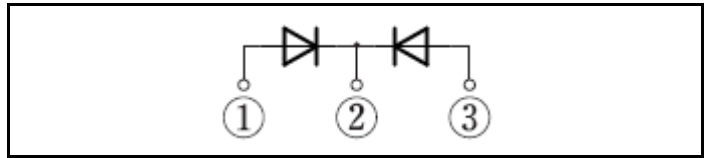

### Absolute Maximum Ratings (unless otherwise specified : T<sub>c</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Storage temperature	T <sub>stg</sub>		-55 to 150	°C
Junction temperature	T <sub>j</sub>		-55 to 150	°C
Repetitive peak reverse voltage	V <sub>RRM</sub>		600	V
Average forward current	I <sub>F(AV)</sub>	50Hz sine wave, Resistance load, Rating for each diode I <sub>F(AV)</sub> /2, With heatsink, T <sub>c</sub> =109°C	10	A
Surge forward current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle, Peak value, T <sub>j</sub> =25°C	120	A
Surge forward current	I <sub>FSM1</sub>	t <sub>p</sub> =1ms, Sine wave, Non-repetitive, Peak value, Per diode, T <sub>j</sub> =25°C	379	A
Dielectric strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2	kV
Mounting torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

※ : See the original Specifications


**Electrical Characteristics** (unless otherwise specified : Tc=25°C)

Item	Symbol	Conditions	Ratings			Unit
			MIN	TYP	MAX	
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =5A, Pulse measurement, Per diode		1.23	1.5	V
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =0.5A, Pulse measurement, Per diode		0.81		V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =600V, Pulse measurement, Per diode			10	μA
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, 0.25I <sub>R</sub> , Per Diode			85	ns
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =1.0A, V <sub>R</sub> =30V, di/dt=-50A/μs, 0.25I <sub>R</sub> , Per Diode			68	ns
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =1.0A, V <sub>R</sub> =420V, di/dt=-50A/μs, 0.25I <sub>R</sub> , Per Diode			78	ns
Total capacitance	C <sub>t</sub>	f=1MHz, V <sub>R</sub> =10V, Per diode		28		pF
Thermal resistance	R <sub>th(j-c)</sub>	Junction to case			2.3	°C/W


※ :See the original Specifications

# CHARACTERISTIC DIAGRAMS


### Forward Voltage

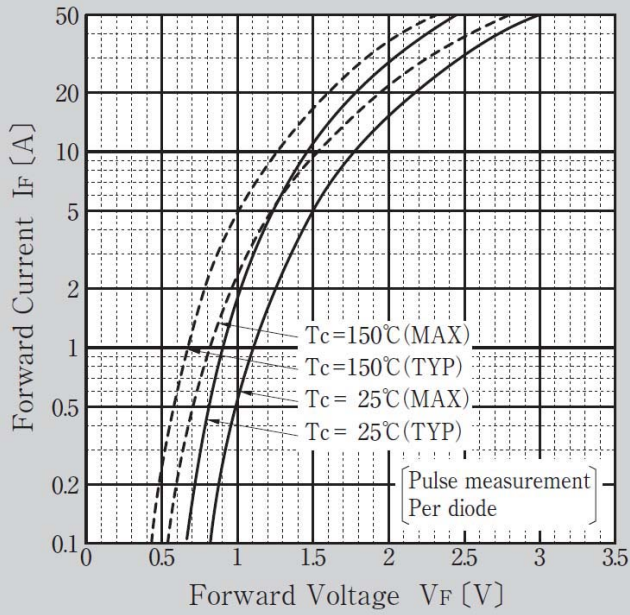


### Forward Power Dissipation


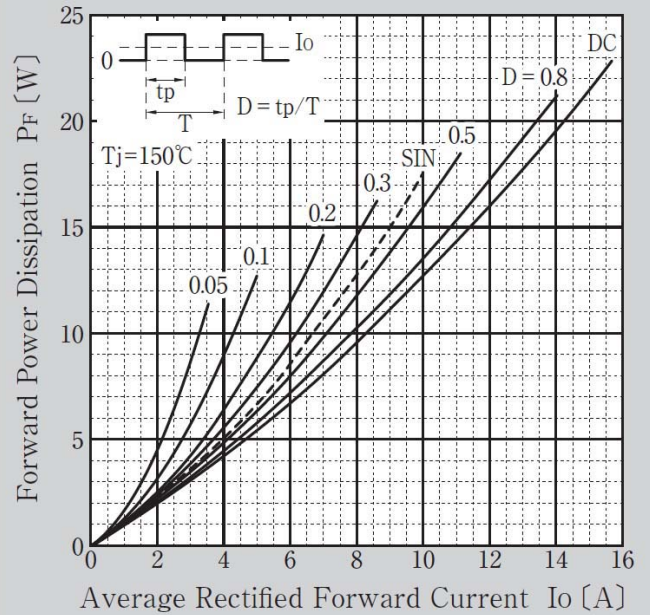


### Peak Surge Forward Current Capability

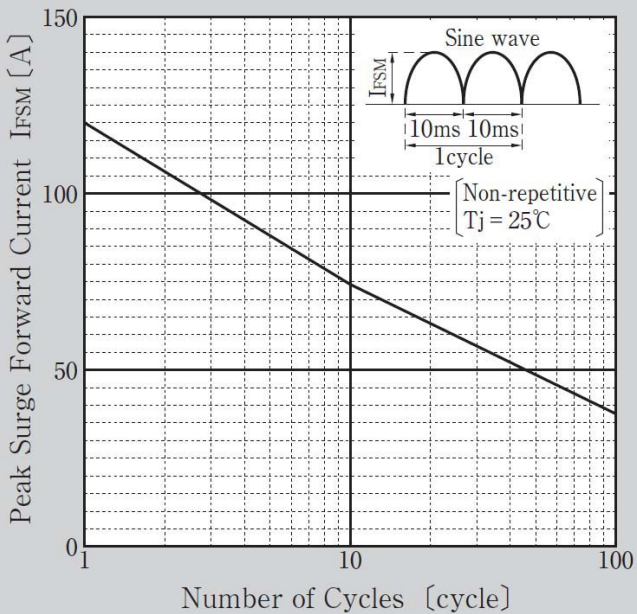

### Peak Surge Forward Current Capability

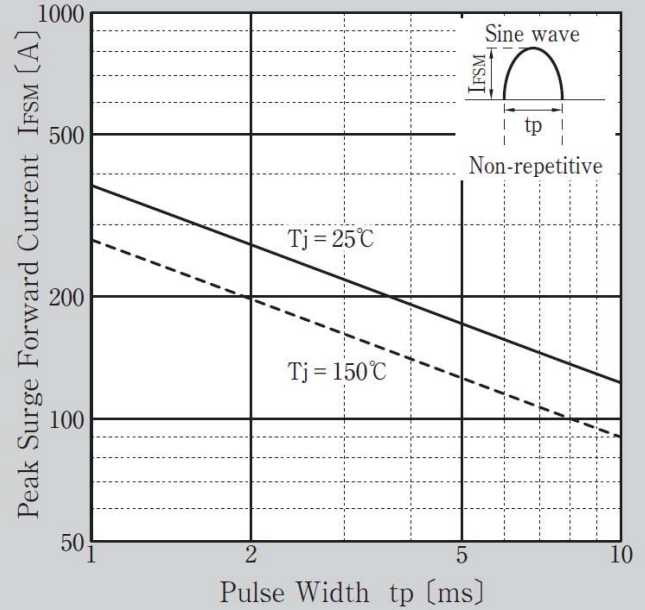

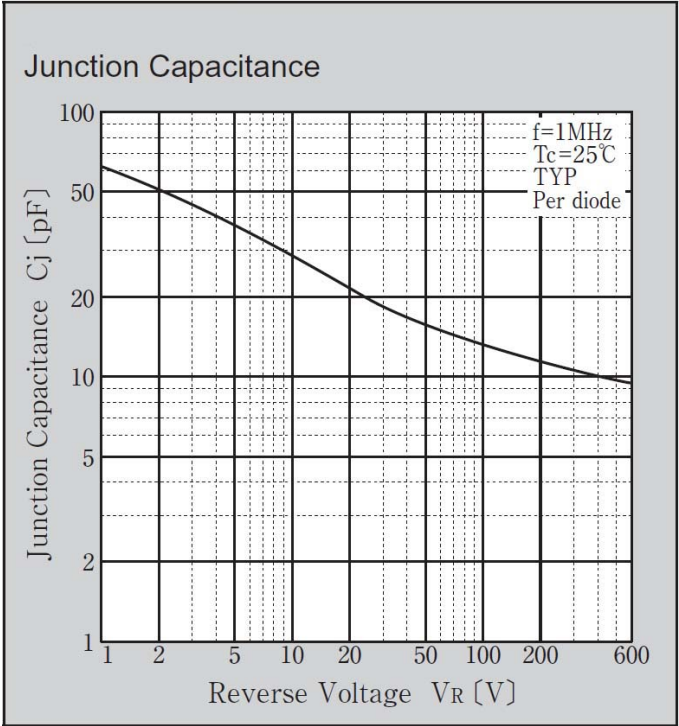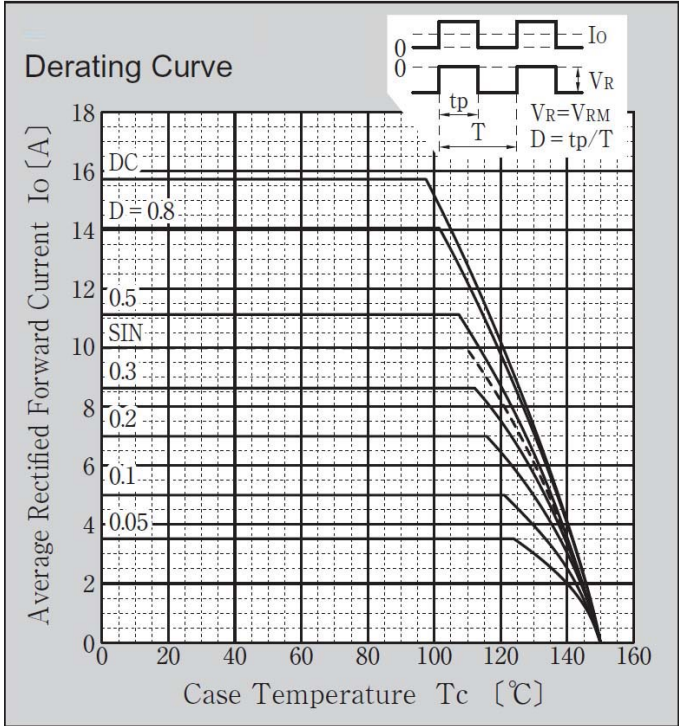

J8

JEDEC Code	-
JEITA Code	SC-91
House Name	FTO-220AG(3pin)

