



COAXIAL

# Adapter

## SFR-NM50+

50Ω DC to 18 GHz SMA-Female to N-Male

### THE BIG DEAL

- Low insertion loss, 0.1 dB typ.
- Excellent VSWR, 1.1 typ.
- Low cost adapters, available from stock
- Passivated stainless steel body and gold-plated beryllium copper center connector



Generic photo used for illustration purposes only

<b>Model No.</b>	SFR-NM50+
<b>Case Style</b>	DJ2556
<b>Connectors</b>	SMA-Female to N-Male

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Interconnection of RF cable and equipment

### PRODUCT OVERVIEW

Mini-Circuits' SFR-NM50+ is a right-angle SMA-Female to N-Male adapter supporting a wide range of applications from DC to 18 GHz. This model provides excellent VSWR, low insertion loss, and flat response versus frequency. The SFR-NM50+ features passivated stainless steel body, nickel plated brass housing and Gold-plated beryllium copper construction center contact.

### KEY FEATURES

Feature	Advantages
Wideband, DC to 18 GHz	Wide frequency range provides application flexibility and makes this model ideal for broadband and multi-band use.
Excellent VSWR, 1.11:1 typ.	Provides good matching for 50Ω systems and minimizes signal reflections across wide frequency range.
Low insertion loss, 0.1 dB	Provides excellent signal power transmission from input to output.
Passivated stainless steel body and Gold-plated beryllium copper construction center contact	Stands up to wear and tear in demanding environments and provides excellent reliability.
Very wide operating temperature range, -55 to +100 °C	Withstands extreme operating conditions and is suitable for use near high power componentry where heat rise is common.

REV. A  
ECO-016626  
SFR-NM50+  
MCL NY  
230126





COAXIAL

# Adapter

## SFR-NM50+

50Ω DC to 18 GHz SMA-Female to N-Male

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Insertion Loss	DC - 6	—	0.07	0.2	dB
	6 - 12	—	0.10	0.3	
	12 - 18	—	0.08	0.34	
VSWR	DC - 6	—	1.03	1.2	:1
	6 - 12	—	1.07	1.3	
	12 - 18	—	1.13	1.3	

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.



COAXIAL


# Adapter

## SFR-NM50+

Mini-Circuits

50Ω DC to 18 GHz SMA-Female to N-Male

### OUTLINE DRAWING

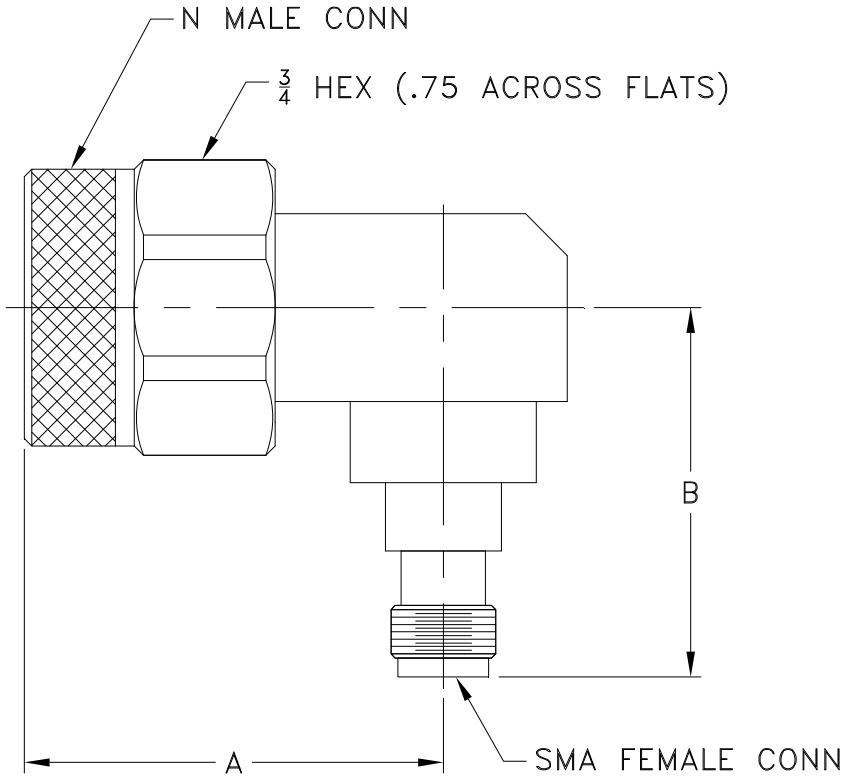

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	wt
1.00	0.88	--	--	--	grams
25.4	22.3	--	--	--	48.0