

## 2A, 20V - 150V Schottky Barrier Surface Mount Rectifier

### FEATURES

- AEC-Q101 qualified
- Low power loss, high efficiency
- Ideal for automated placement
- Guard ring for over-voltage protection
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Low voltage, high frequency
- DC/DC converter
- Freewheeling diodes
- Reverse battery protection
- Car lighting

### MECHANICAL DATA

- Case: DO-214AC (SMA)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 0.070g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	2	A
$V_{RRM}$	20 - 150	V
$I_{FSM}$	50	A
$T_{JMAX}$	125, 150	°C
Package	DO-214AC (SMA)	
Configuration	Single die	


**DO-214AC (SMA)**


ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	SK	SK	SK	SK	SK	SK	SK	SK	UNIT
		22A	23A	24A	25A	26A	29A	210A	215A	
Marking code on the device		SK 22A	SK 23A	SK 24A	SK 25A	SK 26A	SK 29A	SK 210A	SK 215A	
Repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	V
Reverse voltage, total rms value	$V_{R(RMS)}$	14	21	28	35	42	63	70	105	V
Forward current	$I_F$	2								A
Surge peak forward current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	50								A
Non-repetitive peak reverse avalanche energy, $L = 40\text{mH}$	$E_{RSM}$	20								mJ
Critical rate of rise of off-state voltage	$dV/dt$	10,000								V/ $\mu\text{s}$
Junction temperature	$T_J$	-55 to +125				-55 to +150				°C
Storage temperature	$T_{STG}$	-55 to +150								

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-ambient thermal resistance	$R_{\theta JA}$	88	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage <sup>(1)</sup>	SK22AH SK23AH SK24AH	$I_F = 2\text{A}, T_J = 25^\circ\text{C}$	$V_F$	-	0.50	V
	SK25AH SK26AH			-	0.70	V
	SK29AH SK210AH			-	0.85	V
	SK215AH			-	0.95	V
Reverse current @ rated $V_R$ <sup>(2)</sup>	SK22AH SK23AH SK24AH SK25AH SK26AH	$T_J = 25^\circ\text{C}$	$I_R$	-	0.5	mA
	SK29AH SK210AH SK215AH			-	0.1	mA
	SK22AH SK23AH SK24AH	$T_J = 100^\circ\text{C}$	$I_R$	-	10	mA
	SK25AH SK26AH			-	5	mA
	SK29AH SK210AH SK215AH			-	-	mA
	SK22AH SK23AH SK24AH SK25AH SK26AH			$T_J = 125^\circ\text{C}$	$I_R$	-
	SK29AH SK210AH SK215AH	-	2			mA

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE<sup>(1)</sup></b>	<b>PACKAGE</b>	<b>PACKING</b>
SK2xAH	DO-214AC (SMA)	7,500 / Tape & Reel


**Notes:**

1. "x" defines voltage from 20V(SK22AH) to 150V(SK215AH)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

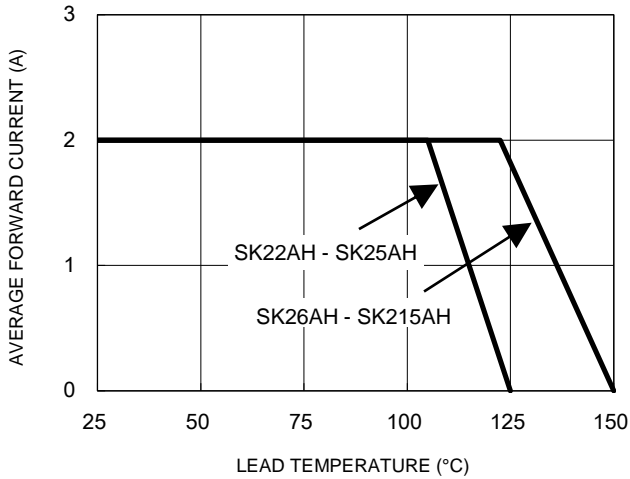


**Fig.2 Typical Junction Capacitance**

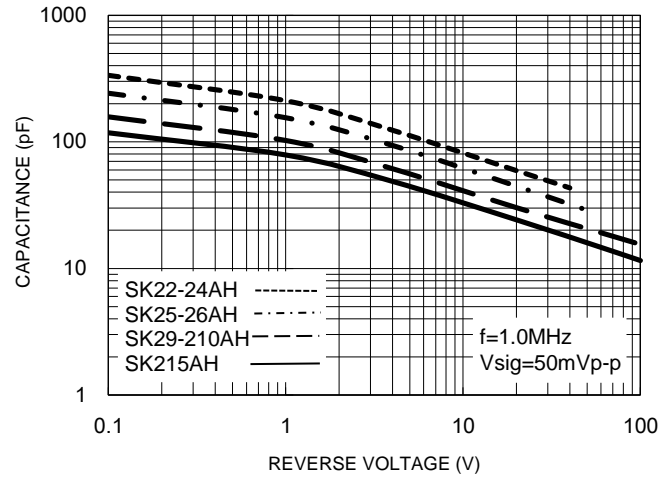


**Fig.3 Typical Reverse Characteristics**

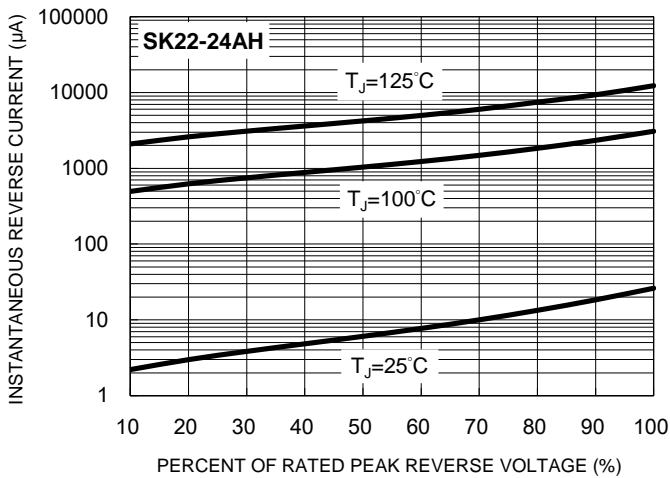


**Fig.4 Typical Forward Characteristics**

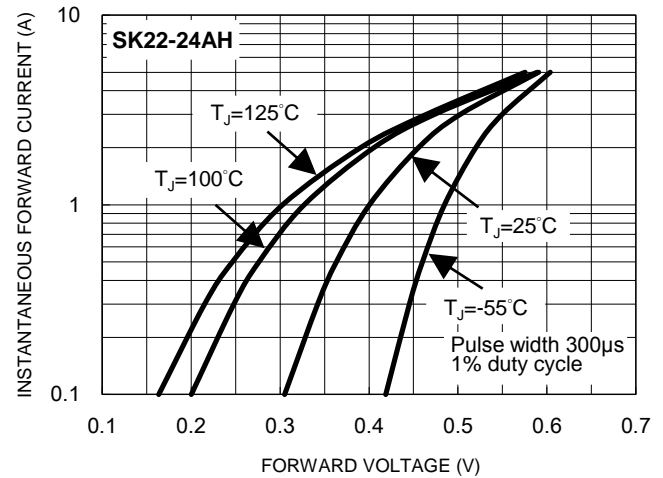

**Fig.5 Typical Reverse Characteristics**

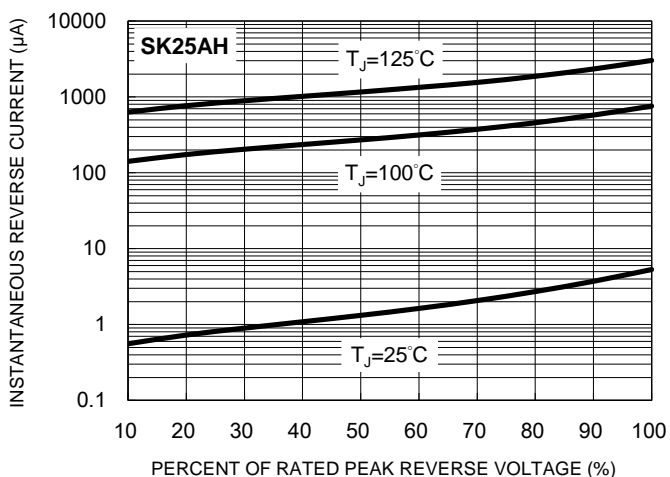


**Fig.6 Typical Forward Characteristics**

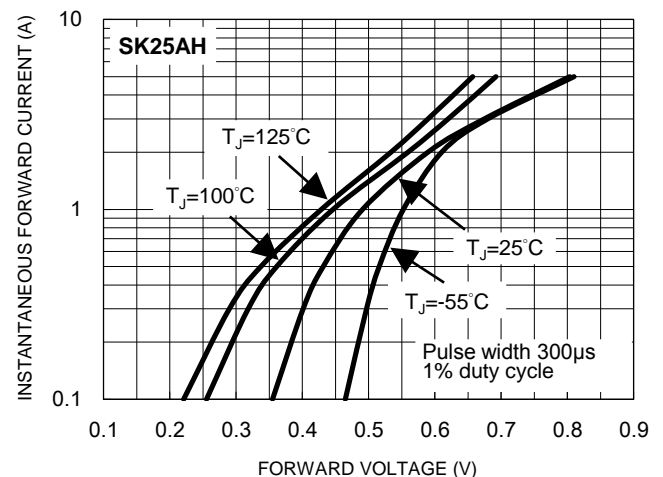


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.7 Typical Reverse Characteristics**

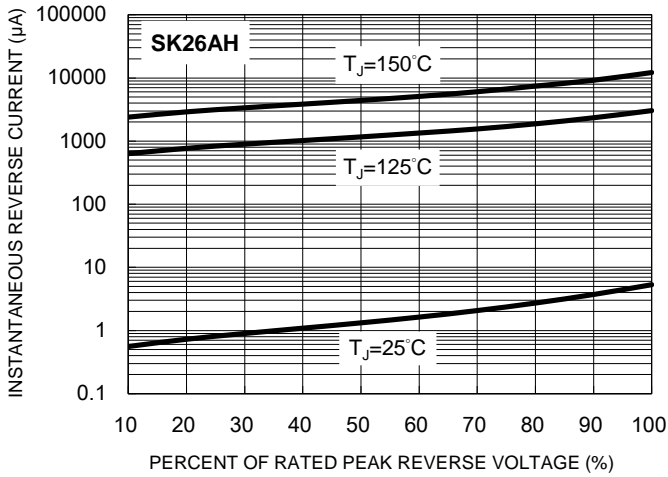


**Fig.8 Typical Forward Characteristics**

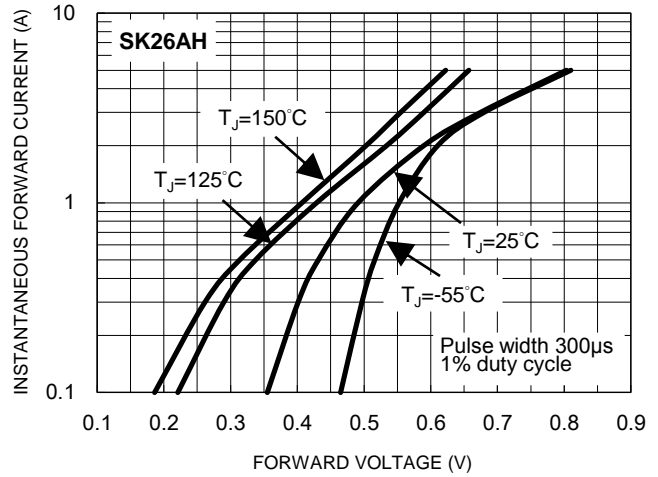


**Fig.9 Typical Reverse Characteristics**

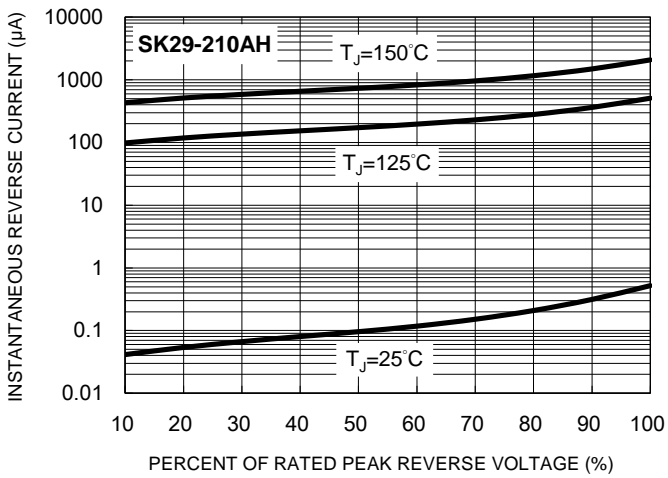


**Fig.10 Typical Forward Characteristics**

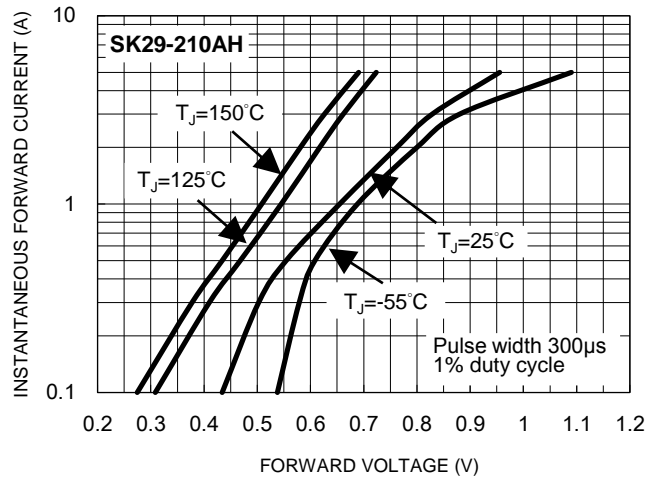

**Fig.11 Typical Reverse Characteristics**

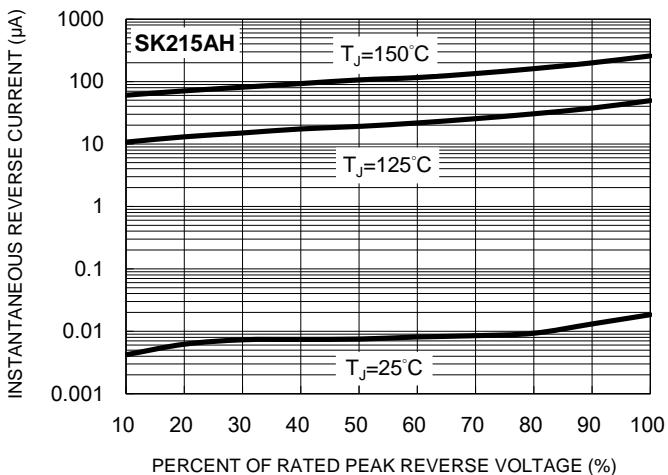


**Fig.12 Typical Forward Characteristics**

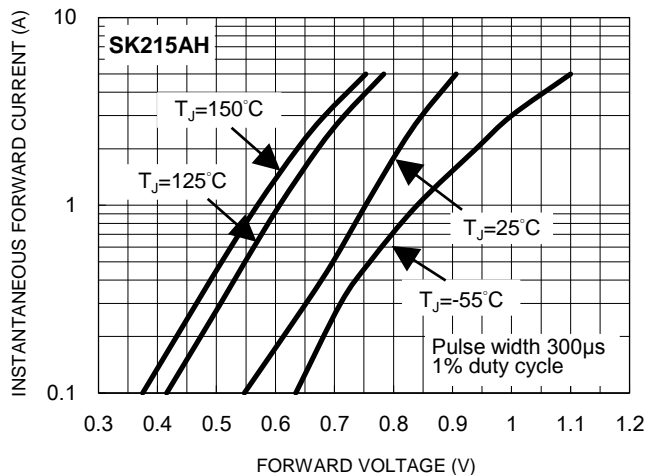


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.13 Maximum Non-Repetitive Forward Surge Current**



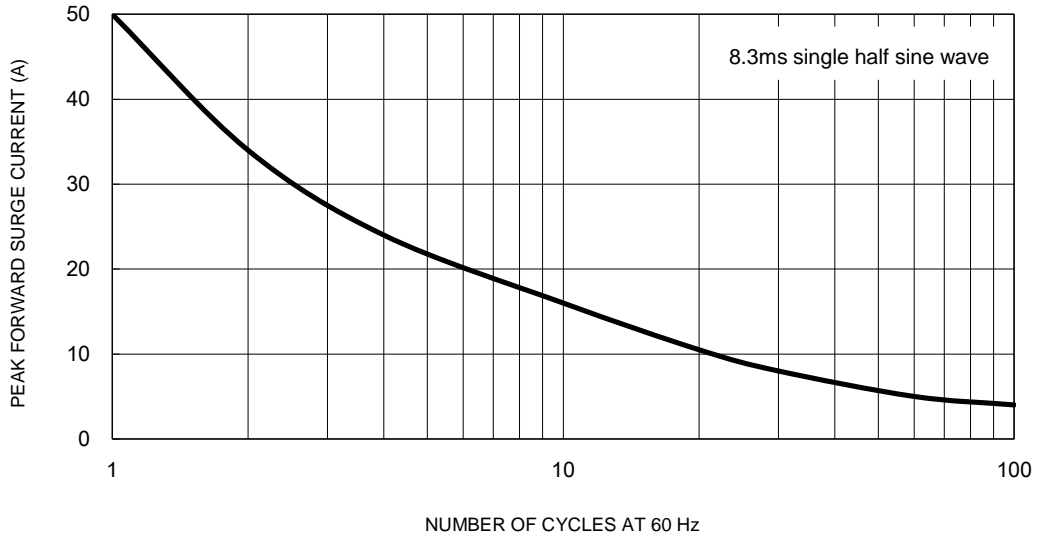


**Fig.14 Typical Transient Thermal Characteristics**

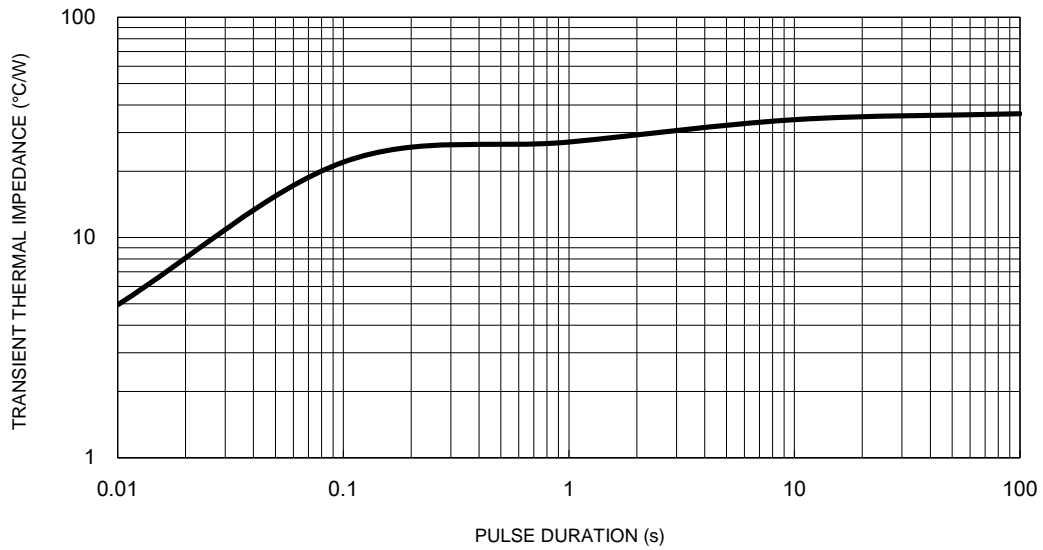

**PACKAGE OUTLINE DIMENSIONS**

**DO-214AC (SMA)**

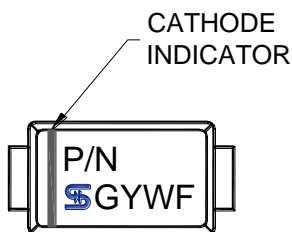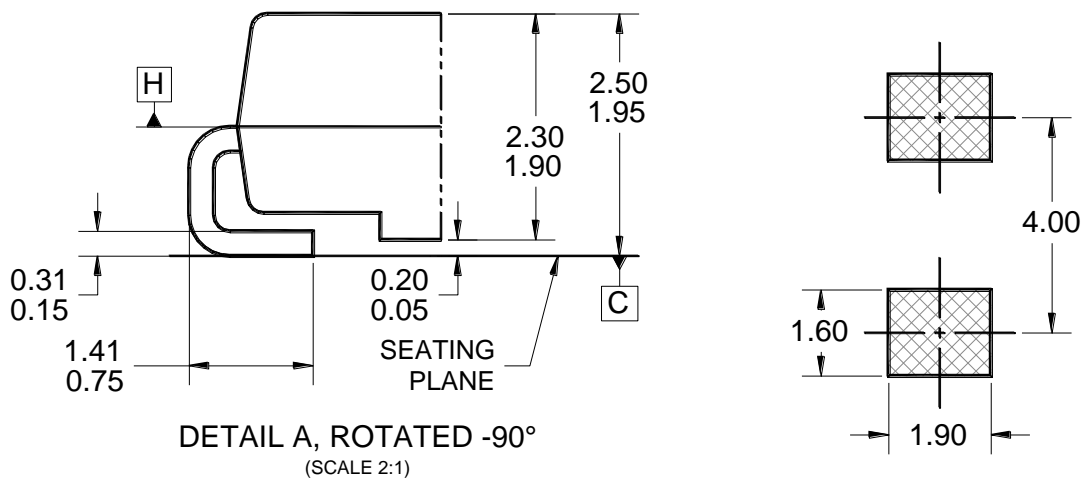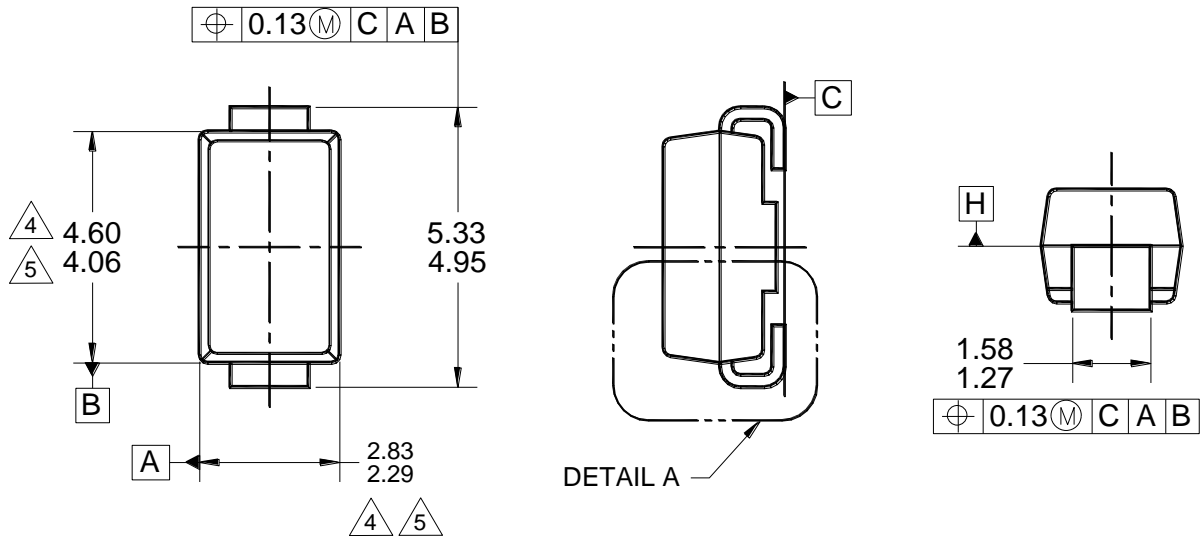

**MARKING DIAGRAM**

P/N = MARKING CODE  
G = GREEN COMPOUND  
YW = DATE CODE  
F = FACTORY CODE

**NOTES: UNLESS OTHERWISE SPECIFIED**

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: JEDEC DO-214, VARIATION AC, ISSUE D.
4. MOLDED PLASTIC BODY DIMENSIONS DO NOT INCLUDE MOLD FLASH.
5. MOLDED PLASTIC BODY LATERAL DIMENSIONS TO BE DETERMINED AT DATUM PLANE H.
6. DWG NO. REF: HQ2SD07-DO214SMC-034 REV A.