

## 5A, 20V - 150V Surface Mount Schottky Barrier Rectifier

### FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- Guard ring for over-voltage protection
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- Converter

### MECHANICAL DATA

- Case: DO-214AA (SMB)
- Molding compound meets UL 94V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Part no. with suffix "H" means AEC-Q101 qualified
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.1 g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_{F(AV)}$	5	A
$V_{RRM}$	20 - 150	V
$I_{FSM}$	120	A
Package	DO-214AA (SMB)	
Configuration	Single Die	



DO-214AA (SMB)

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	SK 52B	SK 53B	SK 54B	SK 55B	SK 56B	SK 59B	SK 510B	SK 515B	UNIT
Marking code on the device		SK 52B	SK 53B	SK 54B	SK 55B	SK 56B	SK 59B	SK 510B	SK 515B	
Repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	V
Reverse voltage, total rms value	$V_{R(RMS)}$	14	21	28	35	42	63	70	105	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	90	100	150	V
Forward current	$I_{F(AV)}$	5								A
Surge peak forward current, 8.3 ms single half sine-wave superimposed on rated load per diode	$I_{FSM}$	120								A
Critical rate of rise of off-state voltage	dV/dt	10000								V/ $\mu\text{s}$
Junction temperature	$T_J$	- 55 to +150								$^\circ\text{C}$
Storage temperature	$T_{STG}$	- 55 to +150								$^\circ\text{C}$

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>LIMIT</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	19	$^{\circ}C/W$
Junction-to-ambient thermal resistance	$R_{\theta JA}$	60	$^{\circ}C/W$

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^{\circ}C$ unless otherwise noted)						
<b>PARAMETER</b>		<b>CONDITIONS</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>MAX</b>	<b>UNIT</b>
Forward voltage per diode <sup>(1)</sup>	SK52B	$I_F = 5A, T_J = 25^{\circ}C$	$V_F$	-	0.55	V
	SK53B					V
	SK54B					V
	SK55B			-	0.75	V
	SK56B			-	0.85	V
	SK59B			-	0.85	V
	SK510B			-	0.95	V
	SK515B			-	0.95	V
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	SK52B	$T_J = 25^{\circ}C$	$I_R$	-	0.5	mA
	SK53B					mA
	SK54B					mA
	SK55B			-	0.1	mA
	SK56B			-	0.1	mA
	SK59B			-	0.1	mA
	SK510B			-	0.1	mA
	SK515B			-	0.1	mA
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	SK52B	$T_J = 100^{\circ}C$	$I_R$	-	20	mA
	SK53B					mA
	SK54B					mA
	SK55B			-	10	mA
	SK56B			-	10	mA
	SK59B			-	-	mA
	SK510B			-	-	mA
	SK515B			-	-	mA
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	SK52B	$T_J = 125^{\circ}C$	$I_R$	-	-	mA
	SK53B					mA
	SK54B					mA
	SK55B			-	-	mA
	SK56B			-	-	mA
	SK59B			-	2	mA
	SK510B			-	2	mA
	SK515B			-	2	mA

**Notes:**

1. Pulse test with  $PW=0.3$  ms
2. Pulse test with  $PW=30$  ms

<b>ORDERING INFORMATION</b>					
<b>PART NO.</b>	<b>PART NO. SUFFIX</b>	<b>PACKING CODE</b>	<b>PACKING CODE SUFFIX(*)</b>	<b>PACKAGE</b>	<b>PACKING</b>
SK5xxB (Note 1)	H	R5	G	SMB	850 / 7" Plastic reel
		R4		SMB	3,000 / 13" Paper reel
		M4		SMB	3,000 / 13" Plastic reel

**Note:**

1. "x" defines voltage from 20V (SK52B) to 150V (SK515B)


\*: Optional available

<b>EXAMPLE P/N</b>					
<b>EXAMPLE P/N</b>	<b>PART NO.</b>	<b>PART NO. SUFFIX</b>	<b>PACKING CODE</b>	<b>PACKING CODE SUFFIX</b>	<b>DESCRIPTION</b>
SK56BHR5G	SK56B	H	R5	G	AEC-Q101 qualified Green compound


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

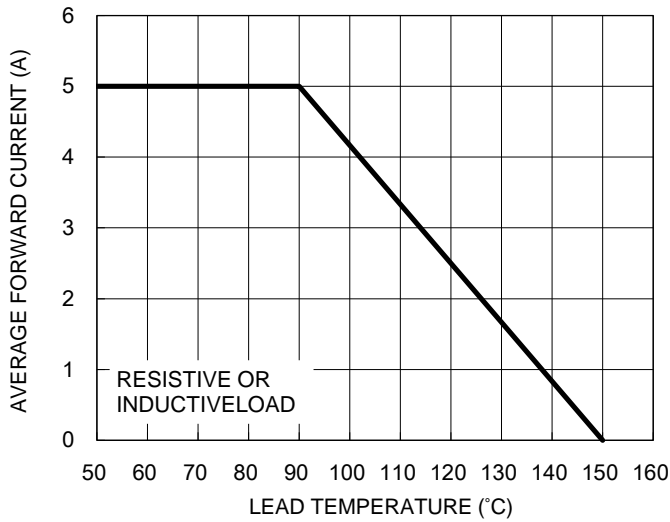


**Fig.2 Typical Junction Capacitance**

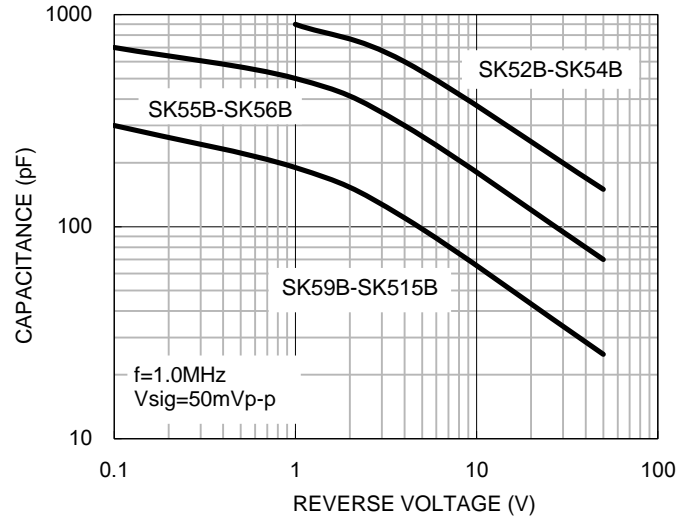

**Fig.3 Typical Reverse Characteristics**

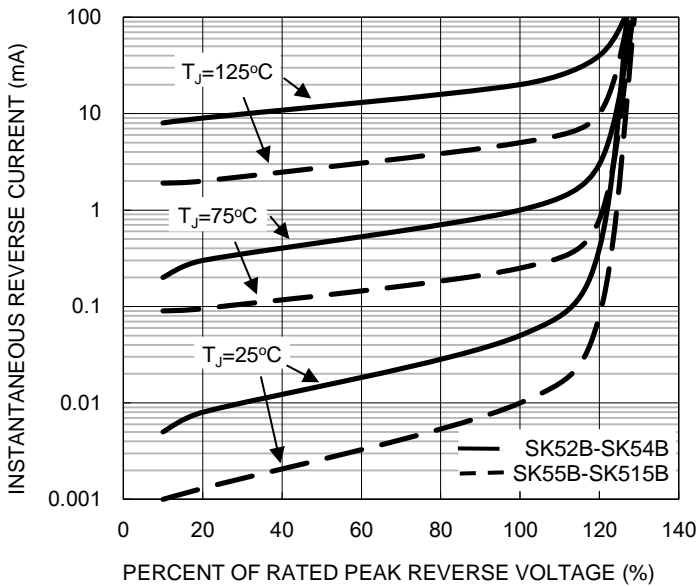


**Fig.4 Typical Forward Characteristics**

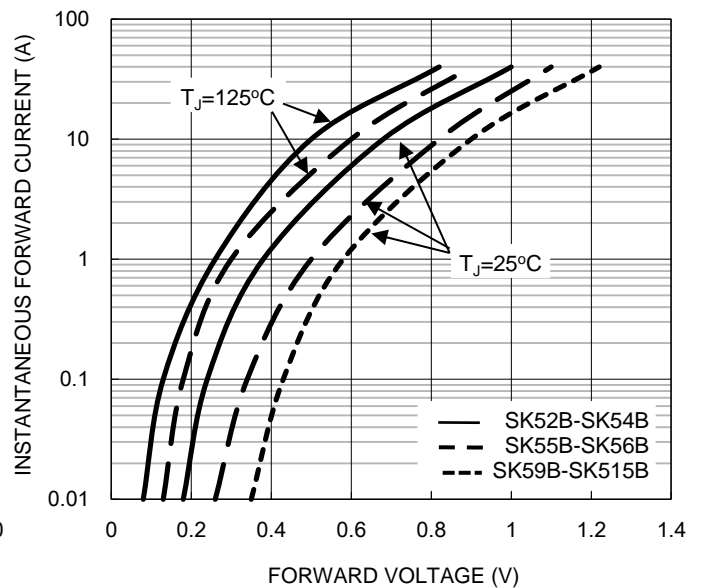


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.5 Maximum Non-repetitive Forward Surge Current**

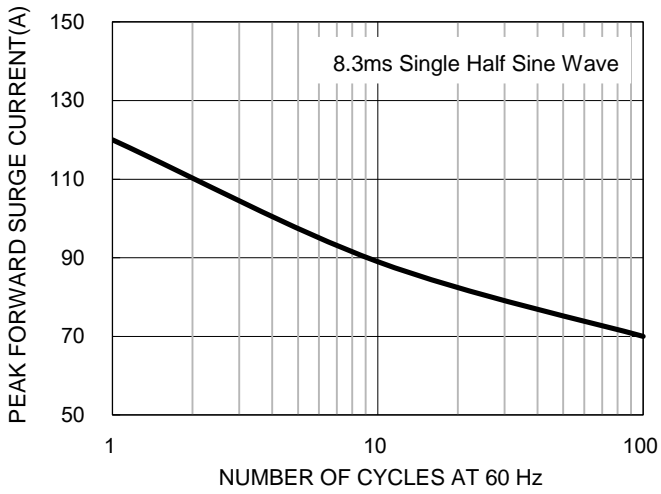


**Fig.6 Typical Transient Thermal Characteristics**

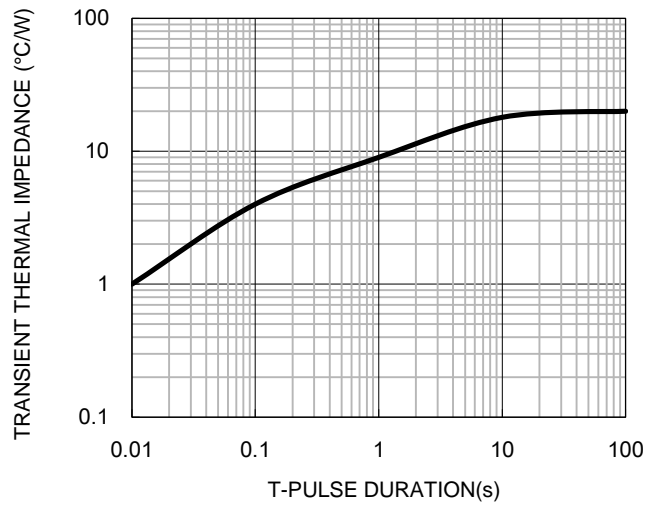


**PACKAGE OUTLINE DIMENSIONS**

DO-214AA (SMB)

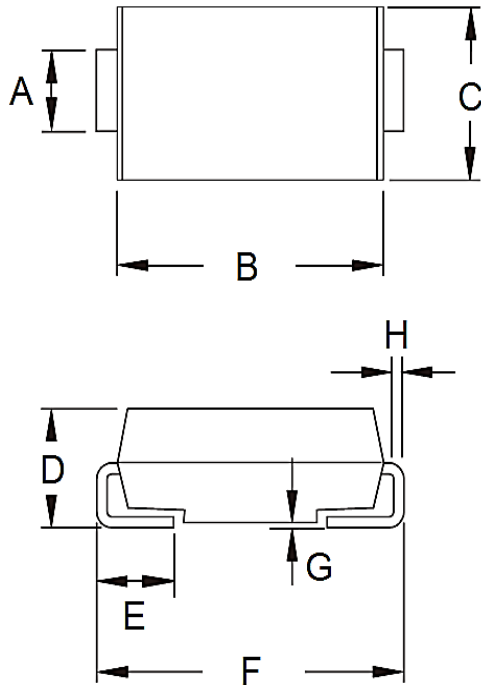

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.95	2.20	0.077	0.087
B	4.05	4.60	0.159	0.181
C	3.30	3.95	0.130	0.156
D	1.95	2.65	0.077	0.104
E	0.75	1.60	0.030	0.063
F	5.10	5.60	0.201	0.220
G	0.05	0.20	0.002	0.008
H	0.15	0.31	0.006	0.012

**SUGGESTED PAD LAYOUT**

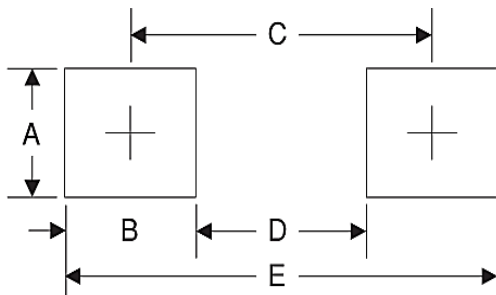

Symbol	Unit (mm)	Unit (inch)
A	2.3	0.091
B	2.5	0.098
C	4.3	0.169
D	1.8	0.071
E	6.8	0.268

**MARKING DIAGRAM**



P/N = Marking Code  
G = Green Compound  
YW = Date Code  
F = Factory Code