

PRELIMINARY DATA SHEET

SKY59608-711LF: Sky5® 2.4 to 8.3 GHz SPDT Switch

Applications

- WiFi 6E T/R switches
- WLAN repeaters
- UWB applications
- Low power transmit/receive systems
- Smartphones
- Connectivity modules

Features

- Broadband frequency range: 2.4 to 8.3 GHz
- Low insertion loss, 0.75 dB typical @ 5 to 7 GHz
- High isolation, 23 dB typical @ 5 to 7 GHz
- Excellent linearity performance, IP0.1dB = +31 dBm
- Single control logic
- 1.1 V and 3.6 V logic compatibility
- Wide 2.7 to 5 V supply voltage range
- 200 nS switching time
- Ultra-miniature, MLPD (6-pin, 1.1 x 0.7 x 0.45 mm) package (MSL1, 260 °C per JEDEC J-STD-020)



Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.

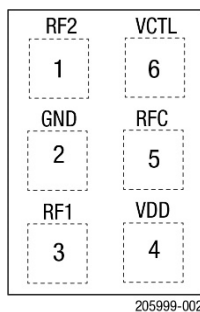


Figure 2. SKY59608-711LF Pinout (Top View)

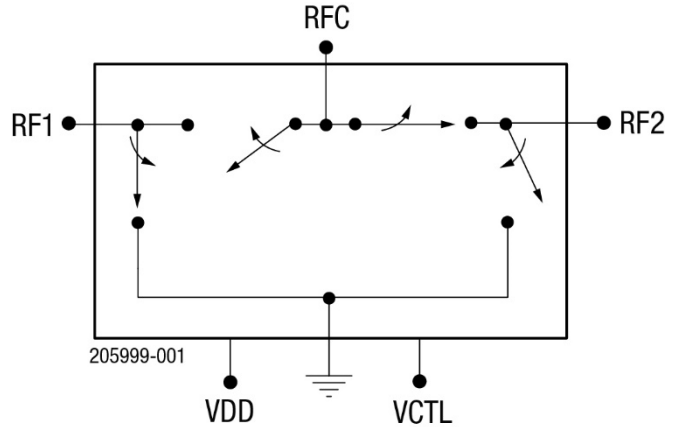


Figure 1. SKY59608-711LF Block Diagram

Description

The SKY59608-711LF is a single-pole, double-throw (SPDT) switch intended for mode switching in WLAN applications. Using advanced switching technologies, the SKY59608-711LF maintains low insertion loss and high isolation for all switching paths. The SKY59608-711LF is part of our Sky5® product portfolio.

The high-linearity performance and low insertion loss achieved by the switch make it an ideal choice for low-power transmit/receive applications. Depending on the logic voltage applied to the control pin (VCTL), the RFC pin is connected to one of the two switched RF outputs (RF1 or RF2) using a low insertion loss path, while the path between the RFC pin and the other RF pin is in a high-isolation state. The switch is a “reflective short” on the isolated port.

The switch is manufactured in a compact, 1.1 x 0.7 x 0.45 mm, 6-pin exposed pad plastic Micro Lead-frame Package Dual (MLPD) package.

A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.

Table 1. SKY59608-711LF Signal Descriptions

Pin	Name	Description	Pin	Name	Description
1	RF2	RF port	4	VDD	DC supply voltage
2	GND	Ground	5	RFC	RF common port
3	RF1	RF port	6	VCTL	Control pin

Electrical and Mechanical Specifications

The absolute maximum ratings of the SKY59608-711LF are provided in Table 2. The recommended operating conditions are specified in Table 3, and electrical specifications are provided in Table 4.

The state of the SKY59608-711LF is determined by the logic provided in Table 5.

Table 2. SKY59608-711LF Absolute Maximum Ratings¹

Parameter	Symbol	Minimum	Maximum	Units
Input power	PIN		+32	dBm
Supply voltage	VDD		5.5	V
Control voltage	VCTL		3.7	V
Storage temperature	TSTG	-65	+150	°C
Operating temperature	TOP	-40	+90	°C

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

ESD HANDLING: Industry-standard ESD handling precautions must be adhered to at all times to avoid damage to this device.

Table 3. SKY59608-711LF Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating frequency	fo	2.4		8.3	GHz
Supply voltage	VDD	2.7	3.3	5	V
Control voltage: Low	VCTL_L	0		0.4	V
High	VCTL_H	1.1		3.6	V
Operating temperature	TOP		+25		°C

Table 4. SKY59608-711LF Electrical Specifications¹

(V_{DD} = 3.3 V, V_{CTL} = 0 V and 1.8 V, T_{OP} = +25 °C, P_{IN} = 0 dBm, Characteristic Impedance [Z₀] = 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
Insertion loss	IL	2400 to 5000 MHz		0.5		dB
		5150 to 5925 MHz		0.6		dB
		5925 to 7125 MHz		0.75		dB
		7125 to 8300 MHz		0.8		dB
Isolation	ISO	2400 to 5000 MHz		28		dB
		5150 to 5925 MHz		26		dB
		5125 To 7125 MHz		23		dB
		7125 to 8300 MHz		20		dB
Input return loss	[S11]	5150 to 7125 MHz		14		dB
Output return loss	[S22]	5150 to 7125 MHz		16		dB
P0.1dB compression point	P0.1dB	5125 to 7125 MHz		+31		dBm
Harmonics	2fo	P _{IN} = +24 dBm: AX80-MCS0 fo = 5150 to 7125 MHz		-54		dBm
	3fo	P _{IN} = +24 dBm: AX80-MCS0 fo = 5150 to 7125 MHz		-53		dBm
Error vector magnitude	EVM	P _{in} = 24 dBm, AX80-MCS11, F ₀ = 5150 to 7125 MHz		-44		dB
IIP3	IIP3	Tone1 = Tone2 = 20 dBm Tone spacing = 10 MHz fo = 5150 to 7125 MHz		65		dBm
Turn on time	T _{on}	Application of V _{DD} to switch ready for use		10		μs
Switching speed	T _{sw}	50% V _{CTL} to 90% RF		200		ns
Supply current	I _{DD}			13		μA

¹ Performance is guaranteed only under the conditions listed in this table.

Table 5. SKY59608-711LF Truth Table¹

VDD (Pin 4)	VCTL (Pin 6)	RFC to RF1 Path	RFC to RF2 Path
1	0	Insertion loss	Isolation
1	1	Isolation	Insertion loss

¹ "1" indicates V_{DD} = 2.7 to 5 V, V_{CTL} = 1.1 to 3.6 V.

"0" indicates V_{CTL} = 0 to 0.4 V.

Any state other than described in this table places the switch into an undefined state. An undefined state will not damage the device.

Typical Performance Characteristics

($V_{DD} = 3.3\text{ V}$, $V_{CTL} = 0\text{ V}$ and 1.8 V , $T_{OP} = +25\text{ }^{\circ}\text{C}$, $P_{IN} = 0\text{ dBm}$, Characteristic Impedance [Z_0] = $50\ \Omega$, Unless Otherwise Noted)

TBD

Evaluation Board Description

The SKY59608-711LF Evaluation Board is used to test the performance of the SKY59608-711LF SPDT Switch. An Evaluation Board diagram is provided in Figure 3. An assembly drawing for the Evaluation Board is shown in Figure 4.

Package Dimensions

The PCB layout footprint for the SKY59608-711LF is provided in Figure 5. Typical part markings are shown in Figure 6. Package dimensions are shown in Figure 7, and tape and reel dimensions are provided in Figure 8.

Package and Handling Information

Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKY59608-711LF is rated to Moisture Sensitivity Level 1 (MSL1) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note, *Solder Reflow Information*, document number 200164.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.

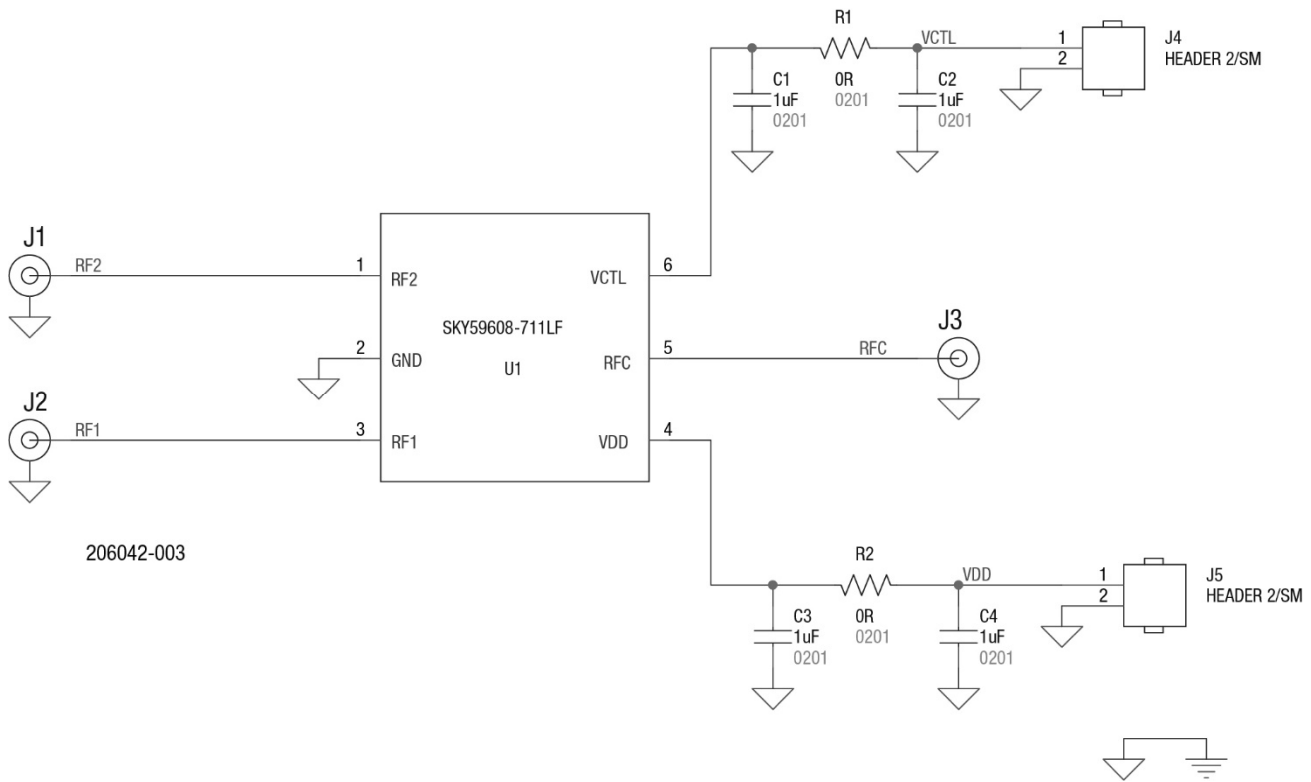


Figure 3. SKY59608-711LF Evaluation Board Schematic


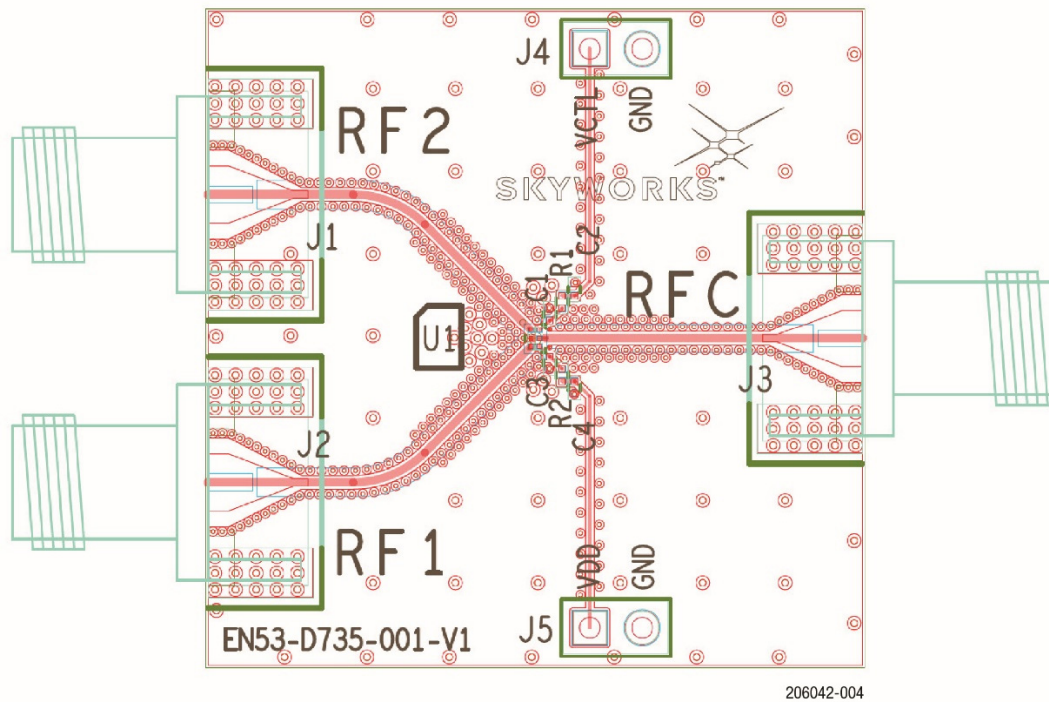



Figure 4. SKY59608-711LF Evaluation Board Assembly Diagram

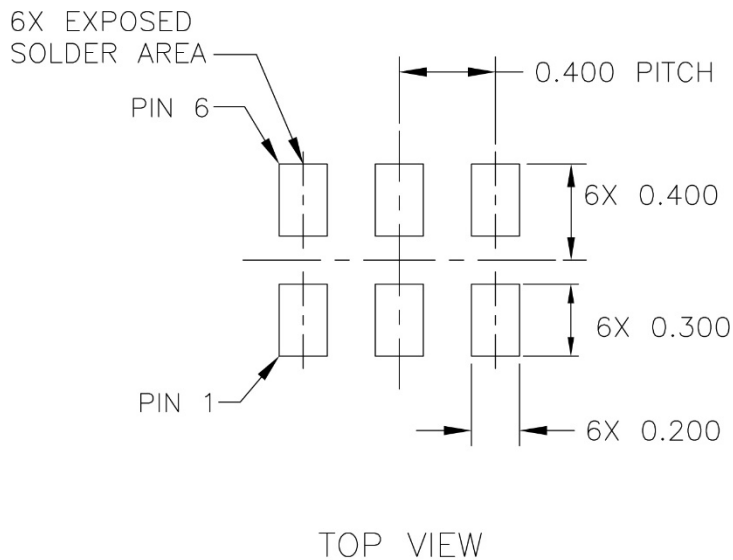

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON FINISH: RMS 63
 ANGLES: ±1/2° FRACTIONS: ±1/64
 3 PLACE DECIMALS: ±0.025
 2 PLACE DECIMALS: ±0.05
 1 PLACE DECIMALS: ±0.1


206042-005

Figure 5. SKY59608-711LF PCB Layout Footprint (Top View)

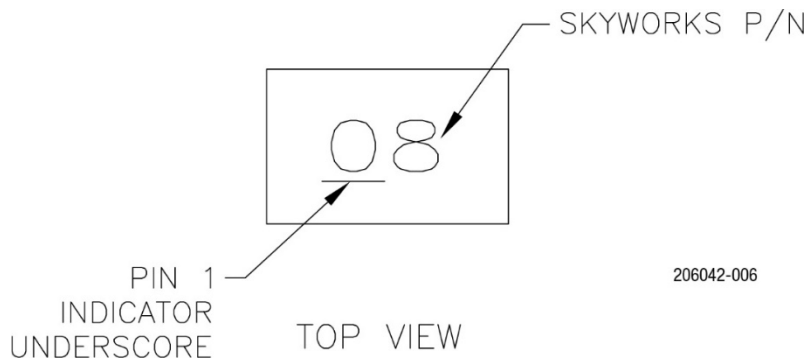

206042-006

Figure 6. Typical Part Markings (Top View)

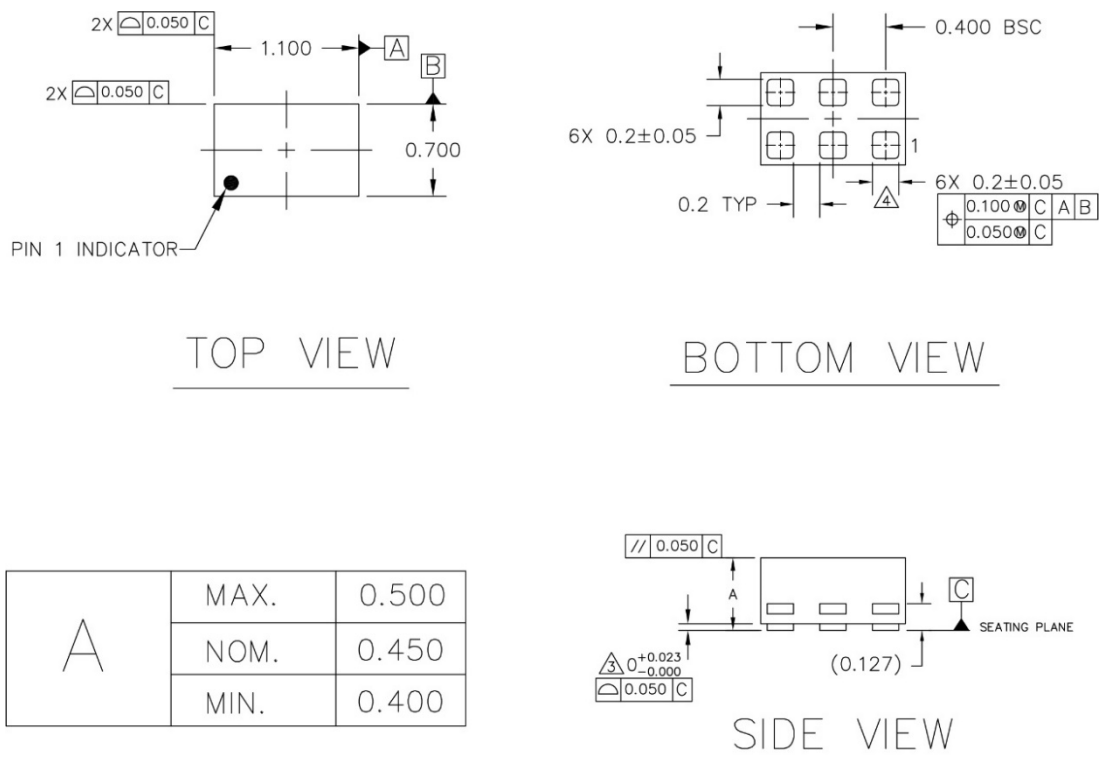

NOTES:

1. PLATING REQUIREMENT PER SOURCE CONTROL DRAWING (SCD) 2504.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. COPLANARITY APPLIES TO THE TERMINALS AND ALL OTHER BOTTOM SURFACE METALLIZATION.
4. DIMENSION APPLIES TO METALLIZED TERMINAL. IF THE TERMINAL HAS A RADIUS ON ITS END, THE WIDTH DIMENSION SHOULD NOT BE MEASURED IN THAT RADIUS AREA.
5. ALL DIMENSIONS ARE IN MILLIMETERS.

206042-007

Figure 7. SKY59608-711LF Package Dimensions

TBD

Figure 8. SKY59608-711LF Tape and Reel Dimensions