


Mechanical Specifications

D	3.7mm Max
T	3.5mm Max
Lead Diameter	0.5 ±0.1mm
S	2.5 ±0.2mm
L	38mm Min
Coating run down	2.0mm Max
B	3.0mm Nom
C	1.0mm Nom

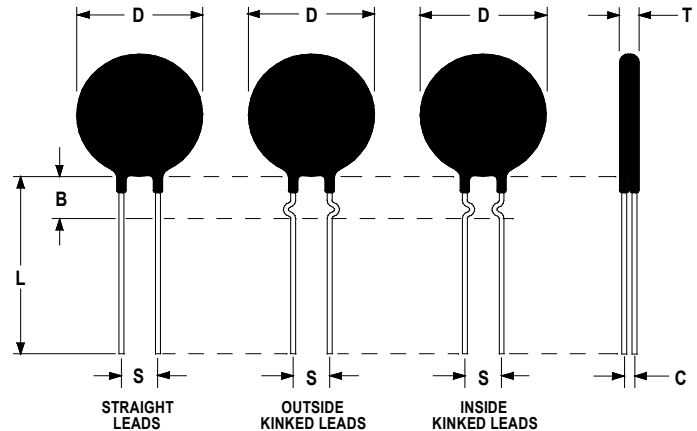

Electrical Specifications

Resistance @ 25°C	10Ω ±20%
Max Steady State Current Up to 65°C	1.0 A
Max recommended energy rating (Joules)	1.0 J
Max Voltage	120 VAC
Max Capacitance @ 120 VAC	100 μF
Resistance @ 100% of Max Current	0.80 Ω
Resistance @ 50% of Max Current	2.0 Ω
Body Temperature @ 100% Current rating	113°C
Dissipation Constant	6.18 mW/°C
Thermal Time Constant	29 seconds
Material Type	A

Revision:	Date:	Change:
0	11/11/08	Issue
1	3/9/23	Revise thickness and diameter dimensions

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com