


Mechanical Specifications

D	20.0mm ±1.0mm
T	6.0mm Max
Lead Diameter	1.0mm ±0.1mm
S	9.5mm ±0.5mm
L	42.0mm Nom
B	9.2mm ±0.5mm
C	3.9mm ±1.0mm

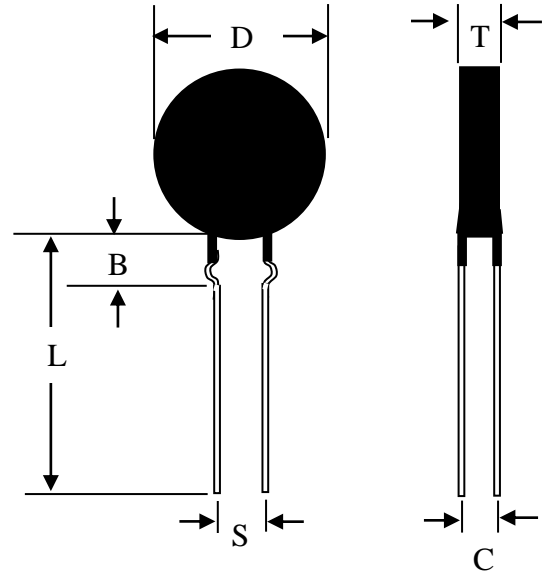

Electrical Specifications

Resistance @ 25°C	5.0 Ω ± 20%
Max Steady State Current Up to 65°C	12.0 A
Max recommended energy rating (Joules)	100.0 J
Max Capacitance @ 120 VAC	6400 μF
Max Capacitance @ 240 VAC	1500 μF
Resistance @ 100% of Max Current	0.054 Ω
Resistance @ 50% of Max Current	0.120 Ω
Body Temperature @ 100% Current rating	214°C
Dissipation Constant	32.4mW/°C
Thermal Time Constant	94 seconds
Material Type (for Beta and Curve)	G

Revision	Date	Change
0	10/31/08	Issue
1	4/4/23	Revised mechanical dimensions

**Ametherm, Inc**  
961 Fairview Drive  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 775 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)