

Universal Phase Monitor

- Monitors up to 700 VAC
 - DIN Rail or Surface Mount
 - Operating Range 200-630 VAC
 - Manual or Automatic Reset
 - Adjustable Restart Delay
 - Adjustable Fault Delay
- PROTECTS AGAINST:
- Rapid Cycling
 - Phase Loss
 - Phase Reversal
 - Phase Unbalance
 - Phase Shift
 - Over/Under Voltage
 - Over/Under Frequency

ORDERING INFORMATION


MODEL NUMBER	DESCRIPTION
SLU-600-ASTDS	Universal Phase Monitor/Relay

The ATC-Diversified Electronics **SLU-600-ASTDS** Universal Phase Monitor protects 3-phase motors up to 700VAC. The **RAPID CYCLING** feature prevents motors cycling due to load-induced line fault conditions. Powered by 120VAC, this reliable motor protection relay is unaffected by transients and disturbances from the monitored power source. The SLU-600 Series is UL Listed under UL File Number E55826.


SPECIFICATIONS

AUTO RANGING SCALES	Frequency	Nominal Line-to-Line Voltages	Adjustable Range	
	60Hz	208, 220, 240, 380, 415, 440, 460, 480, 575, 600	200-250, 360-500, 550-630	
	50Hz	208, 220, 240, 346, 380, 415	200-250, 330-430	
3Ø VOLTAGE BAND	Drop-out	±10% of Range Setting (Under/Over)		
	Pick-up	±7% of Range Setting (Under/Over)		
CONTROL VOLTAGE	120 VAC ±10%, 50/60Hz			
MAXIMUM VOLTAGE	700 VAC (Line-to-Line)			
PHASE SEQUENCE	ABC (Will Not Operate On CBA Sequence)			
POWER REQUIRED	90VA Max.			
PHASE UNBALANCE	2% to 10%, Adjustable Drop-out			
	Hysteresis	10% of Setting		
PHASE SHIFT	13° Drop-out, 12° Pick-up (Ø-Loss)			
FREQUENCY SHIFT	50/60 Hz			
	Drop-out	± 4%		
	Pick up	± 3%		
RAPID CYCLING	5 Cycle Lockout, 30-Min. Cycle Count Reset			
RESET	Automatic or Manual Mode Clears Rapid Cycle Count			
RELAY OUTPUT	DPDT, 10A @ 240 VAC Resistive			
LED'S		Flashing	Continuous	
	Normal (Green LED)	Fault Delay Active	Relay Energized	
	Fault (Red LED)	Restart Delay Active	Relay De-energized	
	Over (Red LED)	Restart Delay Active	Relay De-energized	
	Unbal / Ø Loss (Red LED)	Restart Delay Active	Relay De-energized	
RESPONSE	Power Up	2.5 S Minimum		
	Fault Delay	0.1 to 25 S, Adjustable		
	Severe Fault	100mS (Ø-Loss, Unbalance or Ø Reversal)		
	Restart	0.5 to 300 S, Adjustable (Auto Reset)		
TEMPERATURE RATINGS	Operate	32° to 131°F (0° to +55°C)		
	Storage	-49° to 185°F (-45° to +85°C)		
REPEAT ACCURACY	1% @ Fixed Condition			
TERMINALS	Plug and Socket Term Block with Spring Pressure Wire Retention, 12 AWG Max.			
ENCLOSURE	35mm DIN Rail or Surface Mount, Polycarbonate Housing			
WEIGHT	1.10 lbs.			

DIMENSIONS (INCHES/MILLIMETERS)

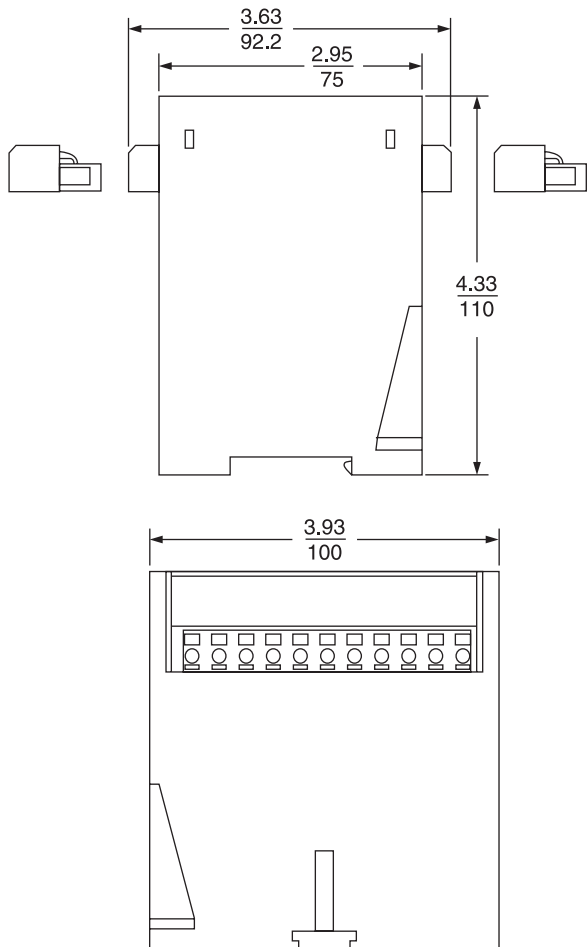

TOP LABEL

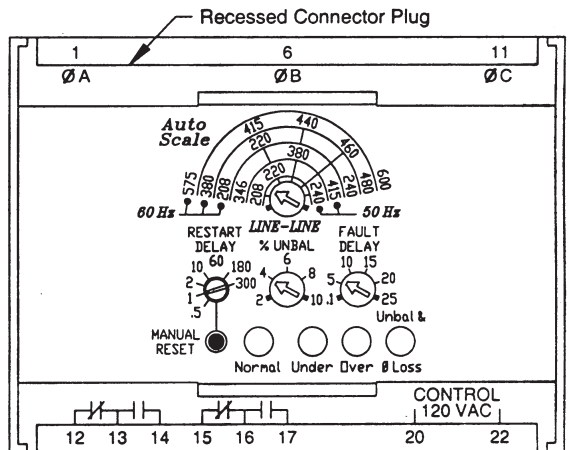

LED STATUS CHART

- = OFF
- = ON
- ☼ = FLASHING

	Normal Green LED	Under Red LED	Over Red LED	Unbal & Ø Loss Red LED
Powering Up/First 3 Sec	●	●	●	☼
Powered Up/Normal Voltages	○	●	●	●
Relay ON/Under Voltage Detected/FAULT DELAY active	☼	●	●	●
Relay ON/Over Voltage Detected/FAULT DELAY active	☼	●	●	●
Relay ON/Unbal or Ø Loss Detected/FAULT DELAY active	☼	●	●	●
Relay OFF/Under Voltage Failure	●	○	●	●
Relay OFF/Over Voltage Failure	●	●	○	●
Relay OFF/Unbal or Ø Loss Failure	●	●	●	○
Relay OFF/Under Voltage Corrected/RESTART DELAY active	●	☼	●	●
Relay OFF/Over Voltage Corrected/RESTART DELAY active	●	●	☼	●
Relay OFF/Unbal or Ø Loss Corrected/RESTART DELAY active	●	●	●	☼