




TOP VIEW

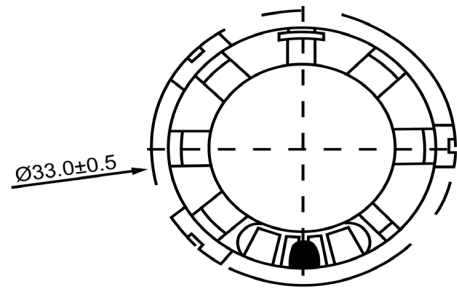

SIDE VIEW



Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Shape	Round		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS  DB UNLIMITED	1	Released from Engineering	2/5/2014	J.S.		
Resonant Frequency	550	(Hz)							
Frequency Range	550 ~ 5,600	(Hz)							
SPL @ 10cm	92	(dBA)							
Impedance	8	(Ohm)							
Cone Material	Polyetherimide								
Nominal Power	0.25	(W)							
Max Power	0.5	(W)							
Mount Type	Flush Mount								
Operating Temperature	- 40 ~ + 85	°C							
Storage Temperature	- 40 ~ + 85	°C							
Weight	6.72	(g)							
				<b>High Temp Dynamic Speaker</b>		<b>SM290508-1</b>			
				Drawn by G.W.	Date 1/27/2014	Checked by C.E.	Date 1/28/2014	Approved by J.S.	Date 2/5/2014

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).