



SM6S14A-AU ~ SM6S48A-AU Series

4.6kW SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Stand-Off Voltage

14~48V



Features

- ISO10605(C=330 pF,R=330Ω): ± 30kV Air, ± 30kV Contact
- HBM ≥ ± 8 kV & CDM ≥ ± 2 kV
- Rated for load dump protection in automotive applications
- Meets ISO 7637-2 / ISO16750-2 Surge specification (varies by test condition)
- Meets MSL Level 1 per J-STD-020
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : Molded plastic, DO-218AB
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.099 ounces, 2.821 grams

DO-218AB



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

| PARAMETER | SYMBOL | LIMIT | UNITS |
|---|----------------------------------|---------|-------|
| 10/1,000us Peak Pulse Power Dissipation on T _A = 25 °C (Note 1) | P _{PPM1} | 4600 | W |
| 10/10,000us Peak Pulse Power Dissipation on T _A = 25 °C | P _{PPM2} | 3600 | W |
| Peak Surge Current (60Hz half wave) | I _{FSM} | 600 | A |
| Typical Thermal Resistance Junction to Case | R _{θJC} | 0.95 | °C/W |
| Power Dissipation on infinite heatsink T _C = 25 °C | P _D | 6 | W |
| ISO10605(C=330 pF,R=330Ω) Contact | V _{ESD} | 30 | kV |
| ISO10605(C=330 pF,R=330Ω) Air | V _{ESD} | 30 | kV |
| Operating and Storage Temperature Range | T _J ,T _{STG} | -55~175 | °C |



SM6S14A-AU ~ SM6S48A-AU Series

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

| Part Number | V _{RWM} | V _{BR} | | | Reverse Leakage | | V _C @I _{PP} (Note 1) | | Marking Code |
|------------------------------------|------------------|-----------------|------|----------------|----------------------------------|--|--|-----|--------------|
| | | Min. | Max. | I _T | I _R @V _{RWM} | I _R @V _{RWM} T _J =175 °C | V | A | |
| | V | V | V | mA | uA | uA | V | A | |
| 4600W Transient Voltage Suppressor | | | | | | | | | |
| SM6S14A-AU | 14 | 15.6 | 17.2 | 5 | 1 | 150 | 23.2 | 198 | 6EKG |
| SM6S15A-AU | 15 | 16.7 | 18.5 | 5 | 1 | 150 | 24.4 | 189 | 6EKH |
| SM6S16A-AU | 16 | 17.8 | 19.7 | 5 | 1 | 150 | 26 | 177 | 6EKK |
| SM6S17A-AU | 17 | 18.9 | 20.9 | 5 | 1 | 150 | 27.6 | 167 | 6EKL |
| SM6S18A-AU | 18 | 20 | 22.1 | 5 | 0.5 | 150 | 29.2 | 158 | 6EKM |
| SM6S20A-AU | 20 | 22.2 | 24.5 | 5 | 0.5 | 150 | 32.4 | 142 | 6EKN |
| SM6S22A-AU | 22 | 24.4 | 26.9 | 5 | 0.5 | 150 | 35.5 | 130 | 6EKP |
| SM6S24A-AU | 24 | 26.7 | 29.5 | 5 | 0.5 | 150 | 38.9 | 118 | 6EKQ |
| SM6S26A-AU | 26 | 28.9 | 31.9 | 5 | 0.5 | 150 | 42.1 | 109 | 6EKR |
| SM6S28A-AU | 28 | 31.1 | 34.4 | 5 | 0.5 | 150 | 45.4 | 101 | 6EKS |
| SM6S30A-AU | 30 | 33.3 | 36.8 | 5 | 0.5 | 150 | 48.4 | 95 | 6EKT |
| SM6S33A-AU | 33 | 36.7 | 40.6 | 5 | 0.5 | 150 | 53.3 | 86 | 6EKU |
| SM6S36A-AU | 36 | 40 | 44.2 | 5 | 0.5 | 150 | 58.1 | 79 | 6EKV |
| SM6S40A-AU | 40 | 44.4 | 49.1 | 5 | 0.5 | 150 | 64.5 | 71 | 6EKW |
| SM6S43A-AU | 43 | 47.8 | 52.8 | 5 | 0.5 | 150 | 69.4 | 66 | 6EKX |
| SM6S48A-AU | 48 | 53.3 | 58.7 | 5 | 0.5 | 150 | 80.6 | 57 | 6EKY |

NOTES:

1. Non-repetitive current pulse, per Fig.3 and derated above T_A=25°C per Fig.1
2. TVS is a transient protection device, it is strongly recommended not to use as a Zener.



SM6S14A-AU ~ SM6S48A-AU Series

TYPICAL CHARACTERISTIC CURVES

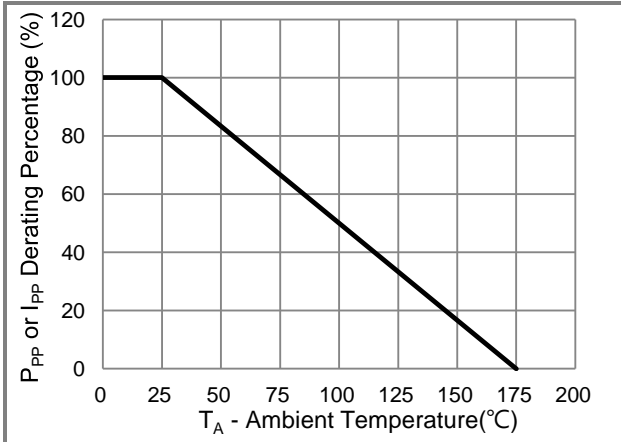


Fig.1 Pulse Power Rating Curve

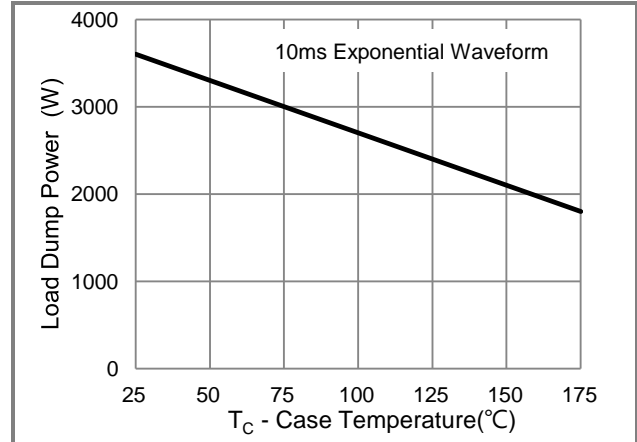


Fig.2 Load Dump Power Characteristics

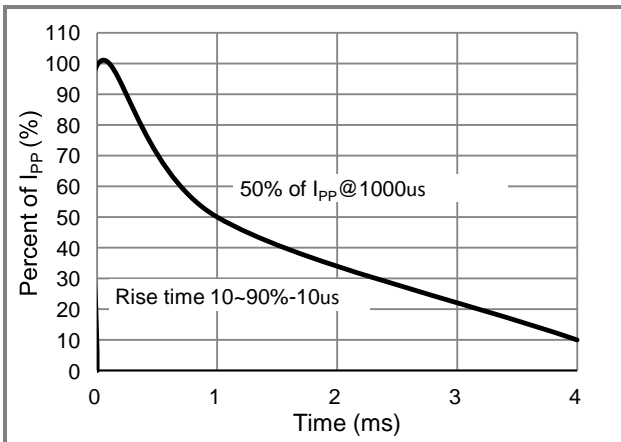


Fig.3 Pulse Waveform

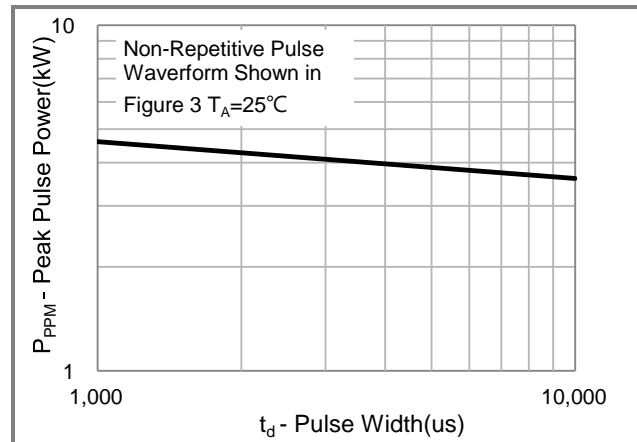


Fig.4 Peak Pulse Power Rating Curve

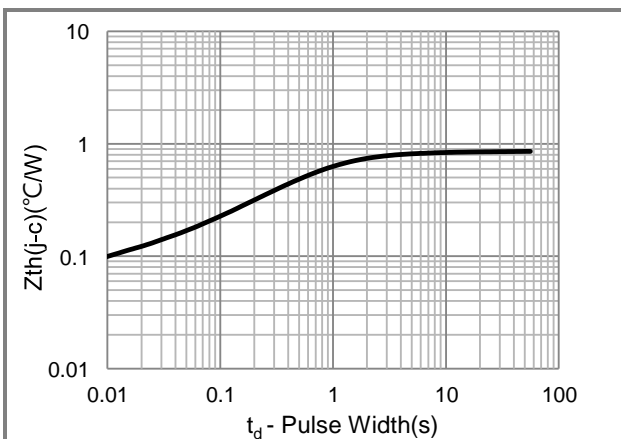


Fig.5 Typical Transient Thermal Impedance

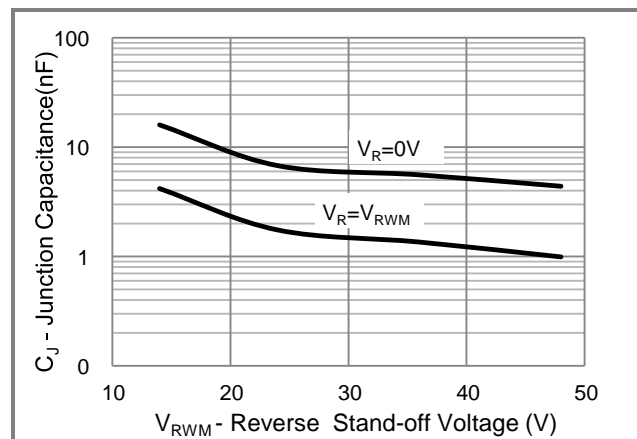


Fig.6 Typical Capacitance



SM6S14A-AU ~ SM6S48A-AU Series

TYPICAL CHARACTERISTIC CURVES

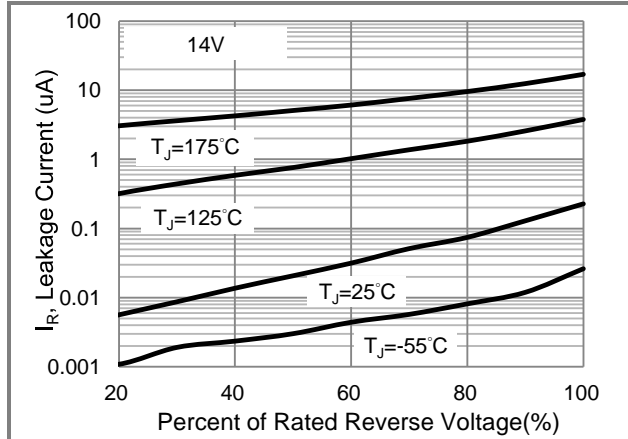


Fig.7 Typical Reverse Characteristics

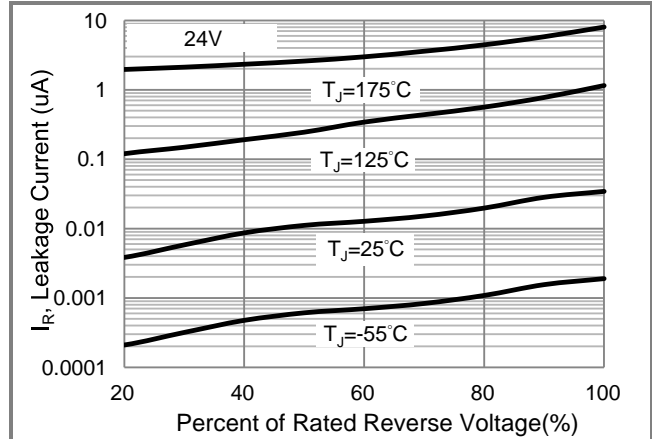


Fig.8 Typical Reverse Characteristics

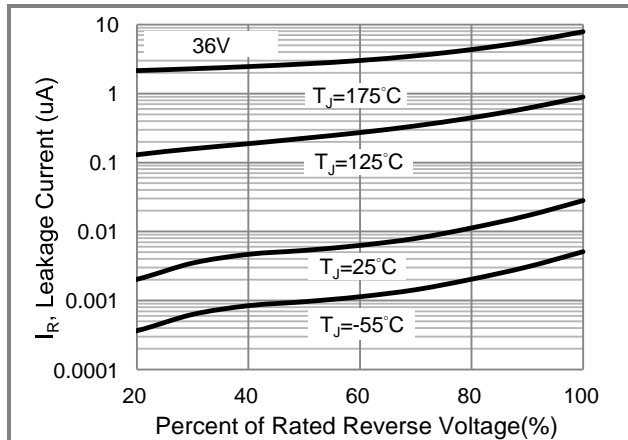


Fig.9 Typical Reverse Characteristics

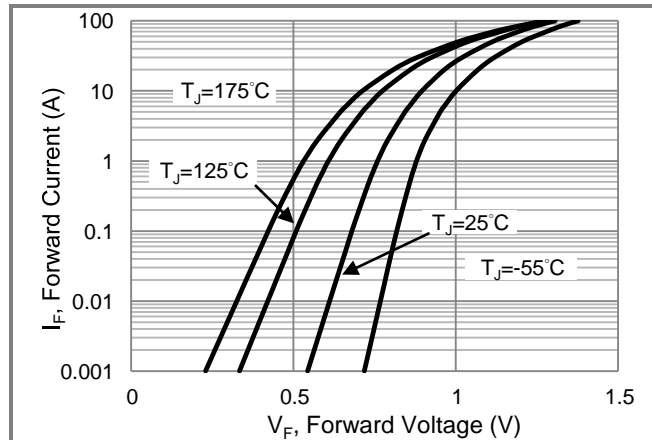


Fig.10 Typical Forward Characteristics

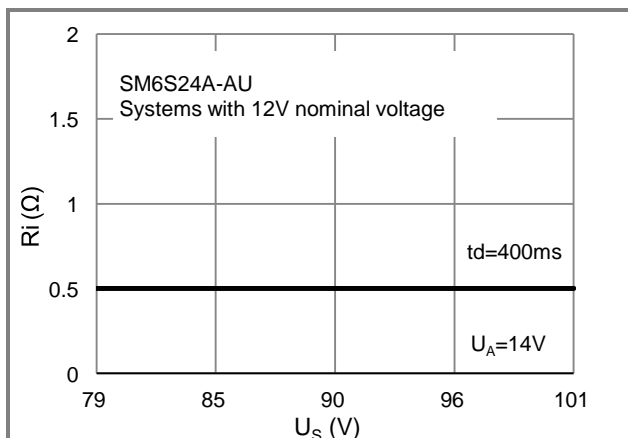


Fig.11 ISO-16750-2 TYPE A

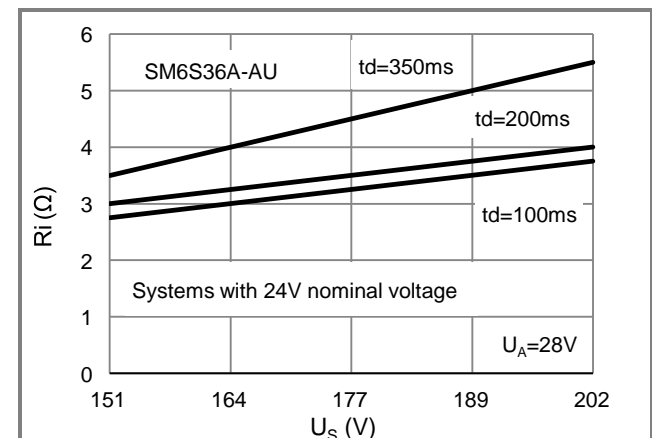


Fig.12 ISO-16750-2 TYPE A



SM6S14A-AU ~ SM6S48A-AU Series

Part No. Packing Code Version

| Part No. Packing Code | Package Type | Packing Type | Marking | Version |
|-----------------------|--------------|--------------------|-----------|--------------|
| SM6SxxA-AU_R2_000A1 | DO-218AB | 600 pcs / 13" reel | See Table | Halogen free |

Packaging Information & Mounting Pad Layout

